

Planet X3 → 22x30 mm | ↓ 5 - 12 mm | ↔ 2 - 6 mm | 6A/9A | ≤ 52 dB



Main features

- Keeps out driving rain (6A/9A, ift certified), for entrance doors and balcony doors
- No drainage channel** required
- 3 simultaneous sealing movements: downwards, to the left and to the right
- All 3 sealing movements (seal height / left + right) are separately adjustable
- Seal height ↓ 5 - 12 mm, lateral movement ↔ 2 - 6 mm
- Acoustic insulation up to ≤ 52 dB in case of an optimal sealing
- Release on both sides
- Automatic compensation at inclined floors
- High-grade silicone lip
- From 68 mm door thickness
- Can be shortened up to the next shorter length on stock with Planet set for shortening X3
- 2 years warranty

Versions / options

- Planet X3 → RD ≤ 52 dB, smoke-shielding, trimmable
- Planet X3 → RD ≤ 52 dB, smoke-shielding, made to measure, ready for installation
- Special versions on request

Required accessories

- Assembly set X3 (including)
- Corner plate set X3

Door types with Planet X3




Single doors – hinged


More functions



Technical specifications

Profile material	aluminum, → 22x30 mm
Groove size	□ 22,5 mm wide and 30 to 32 mm deep
Seal profile	high-grade silicone
Seal height	↓ 5 - 12 mm
Lateral movement	↔ 2 - 6 mm
Driving rain	6A/9A, 250 Pa, classification to DIN EN 12208 test method to DIN EN 1027
Sound absorption value	up to ≤ 52 dB at 7 mm space to the floor
Lift height adjustment	on the release knob with a 3 mm Allen key
Lateral movement	at the face using 4 mm Allen key
Lengths in stock	960, 1085, 1210, 1335, 1460 mm
Special lengths	on request
Release	on both sides (lock and hinge sides)
Can be shortened	max. 125 mm
Fastening	laterally, with stainless steel fastening angles and screws
Test approvals	on request

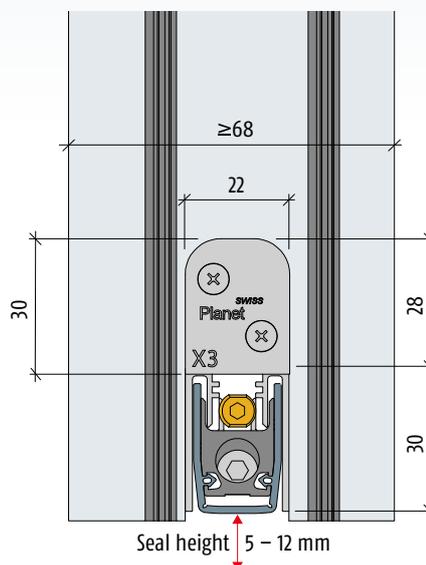




Planet assembly set X3 for wooden doors (standard)




Planet assembly set X3 for metal doors (option)




Planet assembly set X3 for PVC doors (on request)




Planet set for shortening X3 (standard)



Planet corner plate set X3, aluminum, with inclined contact surface (required)



Planet corner plate set X3, sheet met., with inclined contact surface (required)



Installing example corner plate set X3, aluminum, installed on frame



Planet cut assistance X3 (option) for simple cutting of the silicone lip

Order specifications

Planet X3 → RD ≤ 52 dB trimmable incl. Planet set for shortening X3 and assembly set X3 for wooden doors		Trimmable	
→ including Planet set for shortening X3 (see picture below)			
	●	960	>835
	●	1085	>960
	●	1210	>1085
	●	1335	>1210
	●	1460	>1335
		Seal must be assembled!	
		Prod. code 200096	
		Prod. code 200109	
		Prod. code 200121	
		Prod. code 200134	
		Prod. code 200146	



Take care when shortening: inner part of steel!

Planet X3 → RD ≤ 52 dB made to measure, ready for installation incl. Planet assembly set X3 for wooden doors		Made to measure	
		Drop-down seal is ready for installation	
●	960-835	Prod. code 203096	
●	1085-961	Prod. code 203109	
●	1210-1086	Prod. code 203121	
●	1335-1211	Prod. code 203134	
●	1460-1336	Prod. code 203146	


Accessories | Options

Planet assembly set X3 for wooden doors incl. 2 fastening brackets (stainless), 4 screws	Prod. code 900096
Planet assembly set X3 for metal doors incl. 2 fastening brackets (stainless), 4 screws	Prod. code 900097
Planet assembly set X3 for PVC doors on request	Prod. code 900928
Planet Eckplattenset X3, aluminum	Prod. code 900136
Planet Eckplattenset X3, sheet metal	Prod. code 900137
Planet set for shortening X3	Prod. code 900110
Planet cut assistance X3	Prod. code 900930

Advertising text



Planet X3 → RD (smoke-shielding) ≤ 52 dB
Automatic door drop-down seal Planet X3 → RD ≤ 52 dB, for driving rain (6A/9A, if certified) for sound protection-, smoke-shielding doors, release on both sides with automatic compensation in case of an inclined floor, 3 simultaneous sealing movements: sealing movements are adjustable downwards, to the left and to the right. Seal height up to ↓ 5 – 12 mm, lateral movement ↔ 2 – 6 mm, flush or deeper to put in groove with silicon lip protection. Lateral fastening. Aluminum profile → 22 x 30 mm.

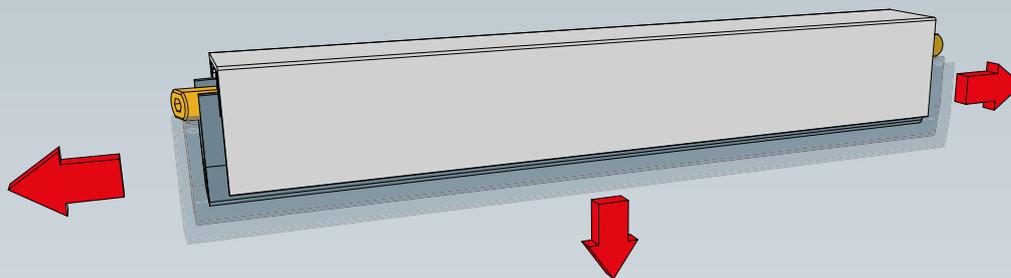


- ✔ 3 simultaneous sealing movements
- ✔ 2 actuation buttons
- ✔ 2 lateral lift settings



Sealing movements

All 3 sealing movements are adjustable:

- ✔ Movement downwards
- ✔ Lateral movement to the left
- ✔ Lateral movement to the right

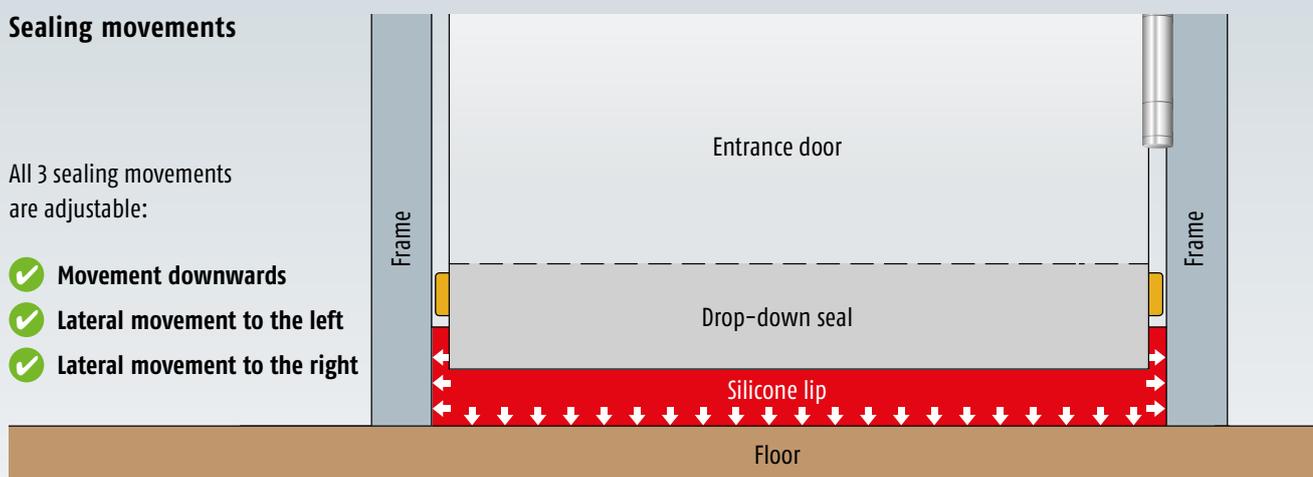


Preparation

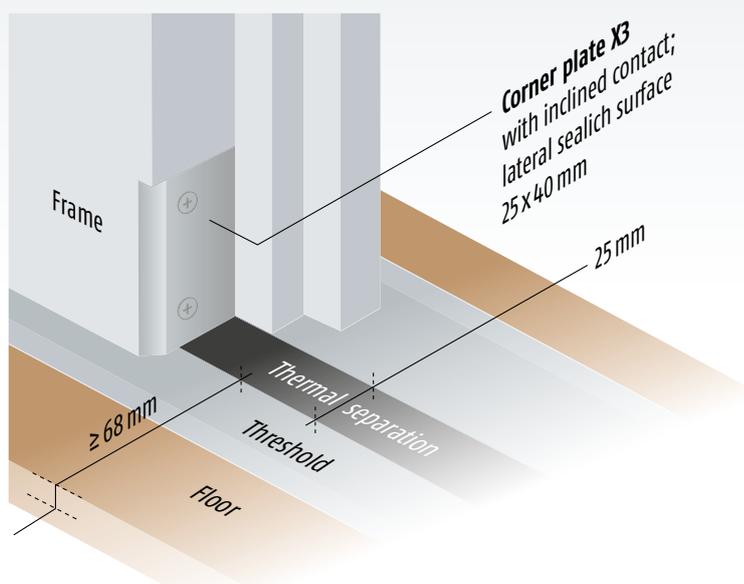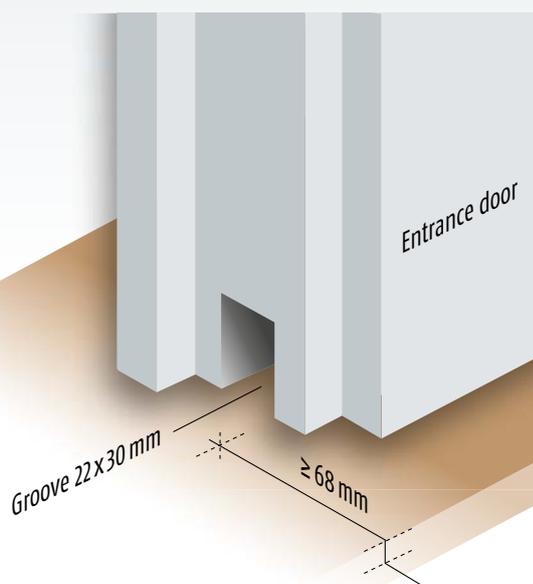


- ✔ Groove in entrance door 22x30 mm
- ✔ Sealing surfaces on 2 sides
- ✔ Smooth floor

Advantages


Planet X3

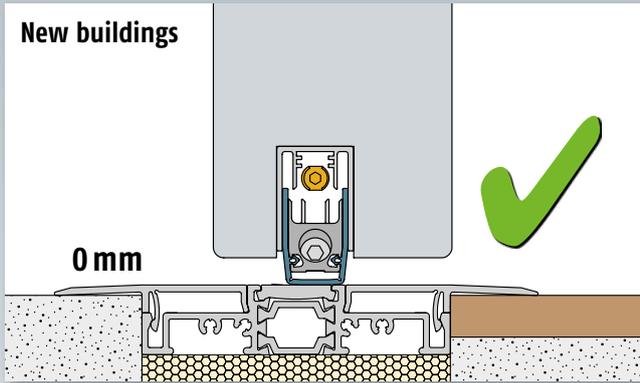


System solution with Gutmann WESER ZERO

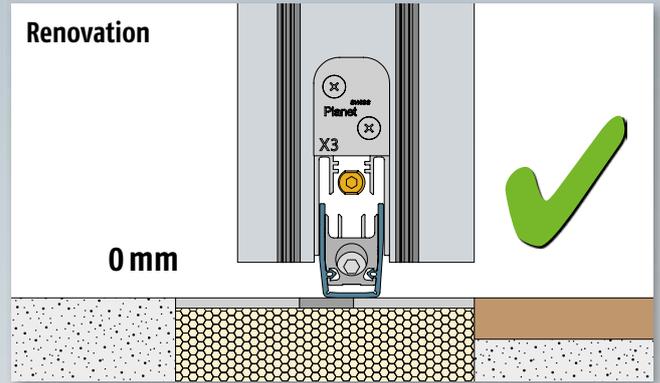

Easy for retrofitting

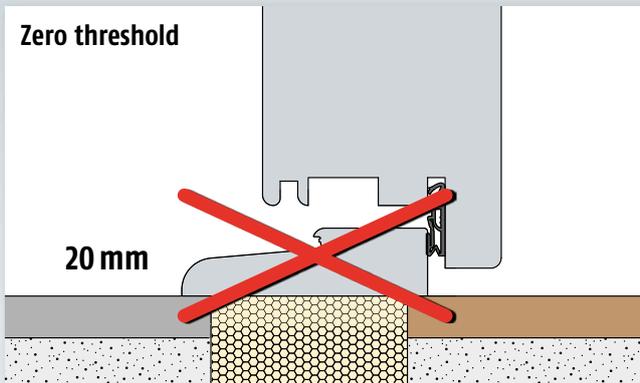


No step to trip over




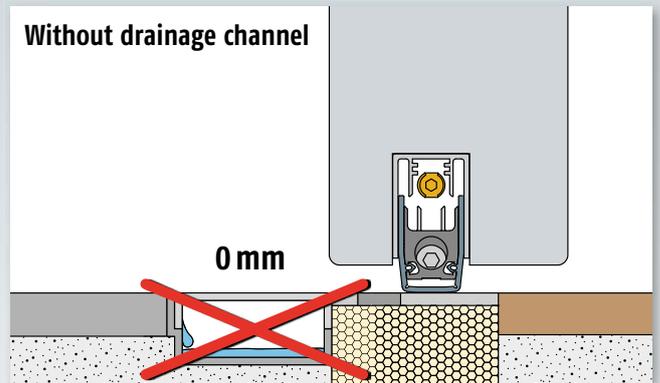


Economical

- ✔ Simple initial adjustment
- ✔ Fits all floor grooves of 5 – 12 mm
- ✔ Lateral movement 2 – 6 mm
- ✔ Fits all door rebates
- ✔ Quick re-adjustment
- ✔ Easy trimmable

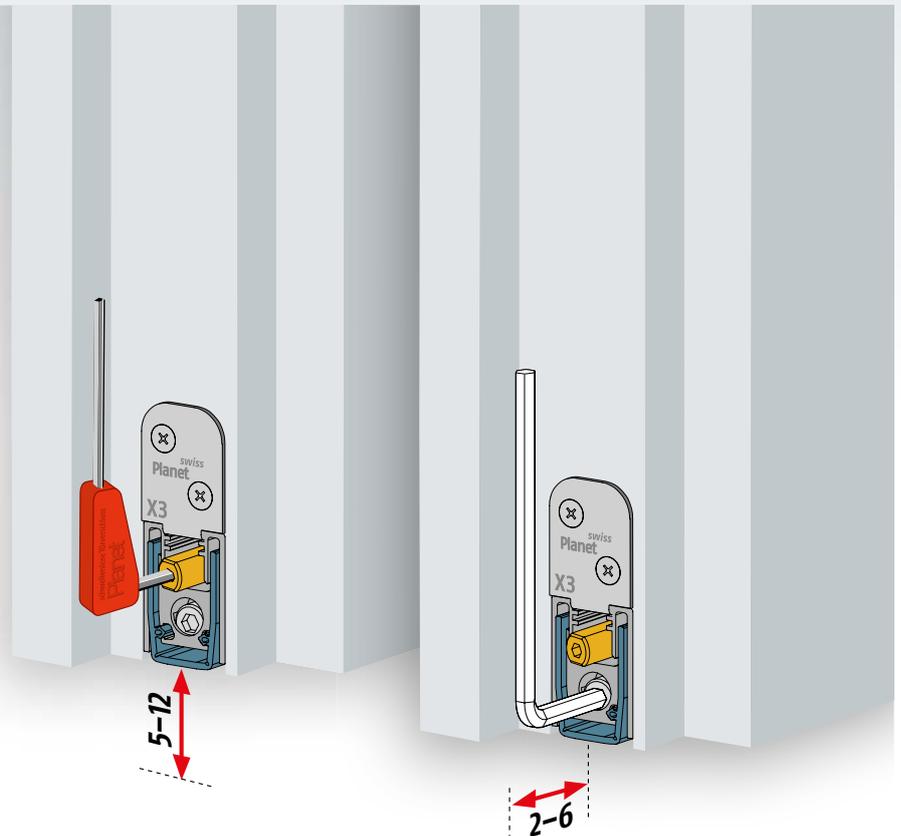

Retirement homes, public buildings, hospitals, private residences, apartment buildings, hotels, care homes, entrance doors, balcony doors

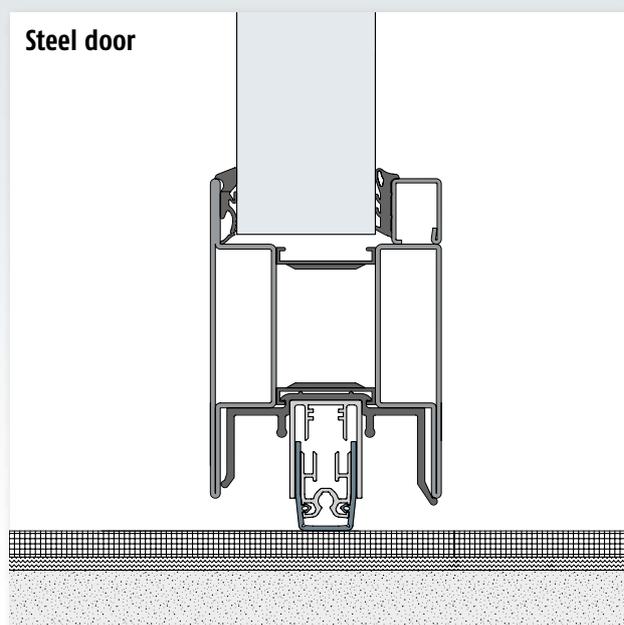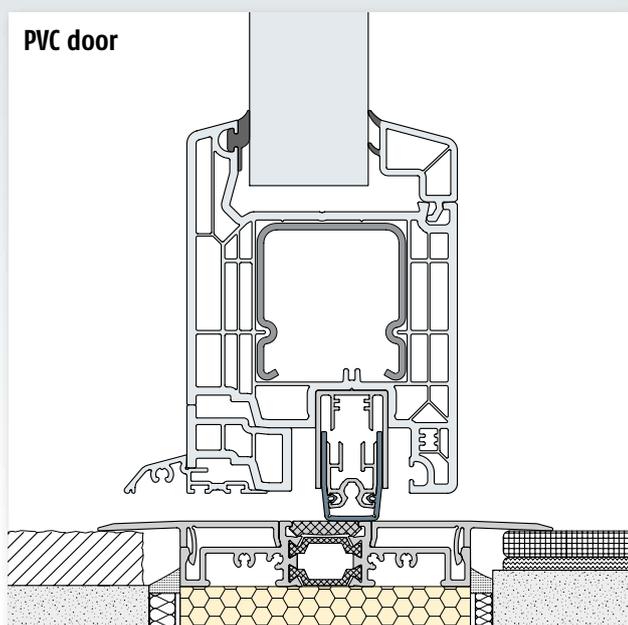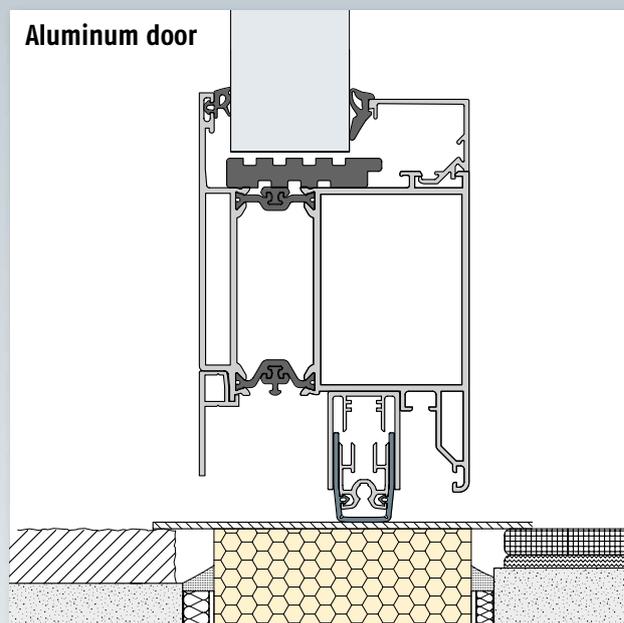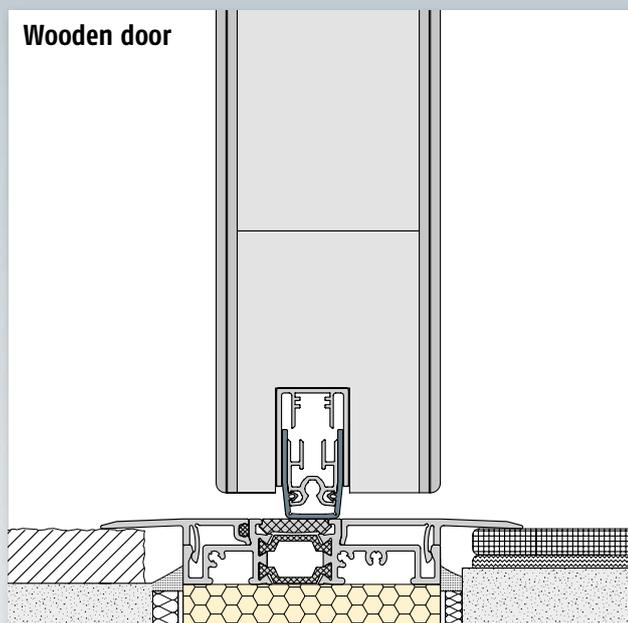

Additionally:

- ✔ Fits all entrance doors in renovations and new buildings
- ✔ Support can be provided based on our own rain test stand
- ✔ More technical details and installation instructions available

Send us your questions/request – we will be pleased to help! → technik@planet.ag

Example:

