


C130

Chain actuator
Thrust force 300N
Max stroke 360mm



DESCRIPTION FOR TECHNICAL SPECIFICATIONS

Electric actuator Topp model C130 with double-link chain, in an elegant die-cast aluminium profile, with custom-made length from 600 mm to 1200 mm, complete with brackets and accessories for top and bottom hung windows. Operation at 230V ~ 50Hz or, as an alternative, at 24V d.c. Max. thrust force 300N. Fast hooking and unhooking system to the window frame. Max. stroke 360 mm. CE marked device.

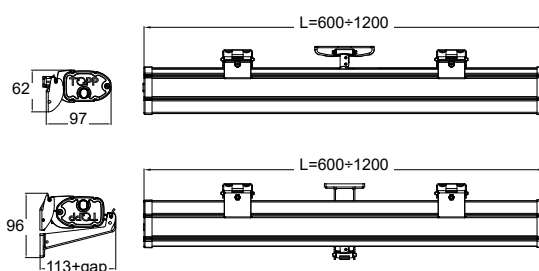

Tailored profile lengths according to the window frame width



Cable exit on both sides for the profile



Innovative and original design

TECHNICAL CHARACTERISTICS

	C130 230V	C130 24V
Power supply voltage	230V ~ 50Hz	min 21V ~ max 28V DC
Max applicable load in thrust		300 N
Max applicable load in traction		200 N
Stroke		360 mm
Absorbed current	0,12 A	0,43 A
Idle translation speed		8 mm/s
Duration of the idle stroke	46 s	48 s
Double insulated	YES	-
Service type		S2 of 4 min
Operating temperature		-5°C +50°C
Protection Class		IP 30
Stroke end regulation in closure		not necessary
Connection of two or more actuators in parallel		YES
Stroke end	Electronic in opening, by amperometric absorption in closing	



CODE PRODUCT DESCRIPTION

C130 chain actuator (profile's length: 600 mm - 900 mm), stroke 360 mm, application on top hung windows

3A6#000005752	C130 chain actuator 230V
3A6#000005596	C130 chain actuator 24V

C130 chain actuator (profile's length: 910 mm - 1200 mm), stroke 360 mm, application on top hung windows


3A6#000005753	C130 chain actuator 230V
3A6#000005597	C130 chain actuator 24V

C130 chain actuator with on-board receiver

3A6#000005598	C130 chain actuator 230V RR (profile's length: 600 mm - 900 mm)
3A6#000005599	C130 chain actuator 230V RR (profile's length: 910 mm - 1200 mm)

Description of the standard pattern, profile 600 mm - 900 mm, application on top hung windows


3A6#000005752	C130 chain actuator 230V
	Frontal bracket for top hung windows (2 pcs)
	Clamps set for top hung brackets (2 pcs)
	ARS fast hooking device to the frame

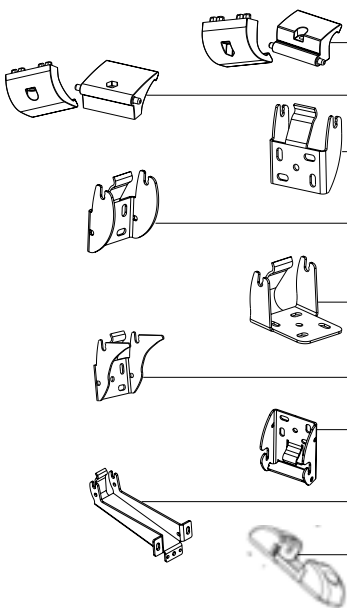


Accessories and spare parts

3A5005	Clamps for top hung windows (zinc-plated)
3A5006	Clamps for bottom hung windows (zinc-plated)
1A5822	Slim frontal bracket for top hung windows (zinc-plated) (window opening min 400mm)
1A5827	Frontal bracket for top hung windows (zinc-plated) (window opening min 700mm)
1A5823	Bracket for vertical mounting (zinc-plated) (window opening >350mm)
1A5832	Bracket for installation on bottom hung windows
1A5829	Bracket for top hung reversed assembly (zinc-plated) (window opening min 250mm)
1A5828	Fallback bracket for bottom hung windows (zinc-plated)
1UA003	ARS Rapid hooking device to the frame - grey


Special stroke < 360 mm available.



Bottom-hung windows



Top-hung windows



Cupolas and skylights