



Cylinders

R50


R7

R6

F6

F5

Cylinder range

							
			F5	F6	R6	R7	R50
Key type	Standard vertical		X	X			
	Flat reversible				X	X	X
	Key with plasticised head					(**)	X
	Compatibility with protection plates					X	X
Active security	Patented system					X	X
	Key copyright						
	Property card (*)					X	X
	Authorised key duplication						X
	Number of codings (including passive pins)		>30.000	>200.000	>40.000	>220.000.000	
Passive security	Cylinder removal		Projecting cam				
	Cam type		DIN				
	Drill resistant		X		Pin in the body	Pin in the body and in the barrel	
			Key profile and antipick pins	Key profile and antipick pins	Key profile and antipick pins	Key profile and antipick pins + active pin	Key profile and antipick pins + active pin + patented key insert
	Anti-picklock						
	Tear-resistant		-	-	-	-	-
Access management	Cylinder potential	x 1 MK	480-7.600	1.200	60.000	60.000	60.000
	Type	KA	X	X	X	X	X
		MK	X	X	X	X	X
		GMK	X	X	X	X	X
		GGMK	X	X	X	X	X
		CK	X	X	X	X	X
	Construction key					X	X
	Rekeyable					X	X
Range	Double cylinder		X	X	X	X	X
	Double cylinder with double function		X	X	X	X	X
	Single-profile cylinder		X	X	X	X	X
	Double cylinder with knob		X	X	X	X	X
	Knobset double cylinder		X	X	X	X	X
	Knobset double cylinder with shortenable shaft		X	X	X	X	X
	other		Service cylinder				
EN 1303:2005	Cyclic durability		6	6	6	6	6
	Key security		4	6	5	6	6

(*) Property card with transcoding, ref. number and coding

(**) Key with plasticized head: the R7 is provided with plastic caps

ISEO cylinders rating according EN1303:2005

(based on the test reports issued by Giordano Institute)

			Rating obtained for each cylinder type							
Cylinder F5 (vertical key)			1	6	0	0	0	C	4	0
Cylinder F6 (vertical key)			1	6	0	0	0	C	6	0
Cylinder R6			1	6	0	0	0	C	5	1
Cylinder R7			1	6	0	0	0	C	6	2
Cylinder R50			1	6	0	0	0	C	6	2

Features	Rating	Requirement
Category of use	1	6.2
Key strength	from 4 to 6	4.1
Cyclic durability		4.2
Door mass	0	4.3
Fire resistance	from 0 to 1	4.4
Security	0	4.5
Temperature and corrosion resistance	0, A, B, C	4.6
Key security	from 1 to 6	4.7
Resistance to picking	from 0 to 2	4.8

Products certifications

ISTITUTO GIORDANO

ABBREVIATED TEST REPORT No. 242759
(Refers to test report No. 215184 issued by this Institute on 24/08/2006)

Place and date of issue: Bellaria-Igna Marina - Italy, 06/07/2008
Customer: ISEO SERRAVALLE S.p.A. - Via San Giordano, 11 - 25015 PISCOONE (BS) - Italy
Date test requested: 15/06/2008
Order number and date: 41873, 01/07/2008
Date sample received: from 03/08/2007 to 03/08/2008
Date of testing: from 03/08/2007 to 06/08/2008
Purpose of test: Testing on lock cylinders in accordance with UNI EN 1303:2007
Test site: Istituto Giordano S.p.A. - Branch 4 - Via San Mauro, 8 - 47014 Bellaria-Igna Marina (RN) - Italy
Origin of sample: supplied and supplied by The Customer
Identification of sample: Nos. 20051307, 20051713, 20051978, 20052227, 20052276, 20060306, 20061438

Sample name:
The sample under test is named "CILINDRO ISEO CHAVE VERTICALE SERIE F"

Standards under reference:
The test was carried out according to standard UNI EN 1303:2007 "Assessment per assessment: Cylinders per assessment. Request a standard of grade" / Testing location: (Indicate in table: Department and/or section)

Test results:
In accordance with testing protocol test, results obtained and specifications of UNI EN 1303:2007, the cylinder under test "CILINDRO ISEO CHAVE VERTICALE SERIE F" can be marked with the following 8-digit classification rating:

1 2 3 4 5 6 7 8

(*) Check of the actual number of combinations, acceptable dimension and of the maximum number of steps at the same height in the test have been obtained from data supplied by The Customer and not verified by the test sample.

Place on Test Report No. 215184 issued by this Institute on 24/08/2006 on test results of the sample, test equipment, test methods, test results

Test Technician: Massimo, Applied Physics Laboratory (Via San Mauro, 8) - Bellaria-Igna Marina (RN) - Italy
Chairman or Managing Director: Dott. Ing. Vincenzo Lombardi

Stamp: [Stamp] Date: [Date] Page: 1 of 1

ISTITUTO GIORDANO

ABBREVIATED TEST REPORT No. 242762
(Refers to test report No. 215123 issued by this Institute on 24/08/2006)

Place and date of issue: Bellaria-Igna Marina - Italy, 06/07/2008
Customer: ISEO SERRAVALLE S.p.A. - Via San Giordano, 11 - 25015 PISCOONE (BS) - Italy
Date test requested: 15/06/2008
Order number and date: 41873, 01/07/2008
Date sample received: from 03/08/2007 to 03/08/2008
Date of testing: from 03/08/2007 to 06/08/2008
Purpose of test: Testing on lock cylinders in accordance with UNI EN 1303:2007
Test site: Istituto Giordano S.p.A. - Branch 4 - Via San Mauro, 8 - 47014 Bellaria-Igna Marina (RN) - Italy
Origin of sample: supplied and supplied by The Customer
Identification of sample: Nos. 20051307, 20051713, 20051978, 20052227, 20052276, 20060306, 20061438

Sample name:
The sample under test is named "CILINDRO ISEO CHAVE VERTICALE SERIE F"

Standards under reference:
The test was carried out according to standard UNI EN 1303:2007 "Assessment per assessment: Cylinders per assessment. Request a standard of grade" / Testing location: (Indicate in table: Department and/or section)

Test results:
In accordance with testing protocol test, results obtained and specifications of UNI EN 1303:2007, the cylinder under test "CILINDRO ISEO CHAVE VERTICALE SERIE F" can be marked with the following 8-digit classification rating:

1 2 3 4 5 6 7 8

(*) Check of the actual number of combinations, acceptable dimension and of the maximum number of steps at the same height in the test have been obtained from data supplied by The Customer and not verified by the test sample.

Place on Test Report No. 215123 issued by this Institute on 24/08/2006 on test results of the sample, test equipment, test methods, test results

Test Technician: Massimo, Applied Physics Laboratory (Via San Mauro, 8) - Bellaria-Igna Marina (RN) - Italy
Chairman or Managing Director: Dott. Ing. Vincenzo Lombardi

Stamp: [Stamp] Date: [Date] Page: 1 of 1

ISTITUTO GIORDANO

ABBREVIATED TEST REPORT No. 242806
(Refers to test report No. 215127 issued by this Institute on 24/08/2006)

Place and date of issue: Bellaria-Igna Marina - Italy, 06/07/2008
Customer: ISEO SERRAVALLE S.p.A. - Via San Giordano, 11 - 25015 PISCOONE (BS) - Italy
Date test requested: 15/06/2008
Order number and date: 41873, 01/07/2008
Date sample received: from 03/08/2007 to 03/08/2008
Date of testing: from 03/08/2007 to 06/08/2008
Purpose of test: Testing on lock cylinders in accordance with UNI EN 1303:2007
Test site: Istituto Giordano S.p.A. - Branch 4 - Via San Mauro, 8 - 47014 Bellaria-Igna Marina (RN) - Italy
Origin of sample: supplied and supplied by The Customer
Identification of sample: Nos. 20051307, 20051713, 20051978, 20052227, 20052276, 20060306, 20061438

Sample name:
The sample under test is named "CILINDRO ISEO CHAVE PLATTA SERIE R"

Standards under reference:
The test was carried out according to standard UNI EN 1303:2007 "Assessment per assessment: Cylinders per assessment. Request a standard of grade" / Testing location: (Indicate in table: Department and/or section)

Test results:
In accordance with testing protocol test, results obtained and specifications of UNI EN 1303:2007, the cylinder under test "CILINDRO ISEO CHAVE PLATTA SERIE R" can be marked with the following 8-digit classification rating:

1 2 3 4 5 6 7 8

(*) Check of the actual number of combinations, acceptable dimension and of the maximum number of steps at the same height in the test have been obtained from data supplied by The Customer and not verified by the test sample.

Place on Test Report No. 215127 issued by this Institute on 24/08/2006 on test results of the sample, test equipment, test methods, test results

Test Technician: Massimo, Applied Physics Laboratory (Via San Mauro, 8) - Bellaria-Igna Marina (RN) - Italy
Chairman or Managing Director: Dott. Ing. Vincenzo Lombardi

Stamp: [Stamp] Date: [Date] Page: 1 of 1

ISTITUTO GIORDANO

ABBREVIATED TEST REPORT No. 242763
(Refers to test report No. 215127 issued by this Institute on 24/08/2006)

Place and date of issue: Bellaria-Igna Marina - Italy, 06/07/2008
Customer: ISEO SERRAVALLE S.p.A. - Via San Giordano, 11 - 25015 PISCOONE (BS) - Italy
Date test requested: 15/06/2008
Order number and date: 41873, 01/07/2008
Date sample received: from 03/08/2007 to 03/08/2008
Date of testing: from 03/08/2007 to 06/08/2008
Purpose of test: Testing on lock cylinders in accordance with UNI EN 1303:2007
Test site: Istituto Giordano S.p.A. - Branch 4 - Via San Mauro, 8 - 47014 Bellaria-Igna Marina (RN) - Italy
Origin of sample: supplied and supplied by The Customer
Identification of sample: Nos. 20051307, 20051713, 20051978, 20052227, 20052276, 20060306, 20061438

Sample name:
The sample under test is named "CILINDRO ISEO CHAVE VERTICALE SERIE R"

Standards under reference:
The test was carried out according to standard UNI EN 1303:2007 "Assessment per assessment: Cylinders per assessment. Request a standard of grade" / Testing location: (Indicate in table: Department and/or section)

Test results:
In accordance with testing protocol test, results obtained and specifications of UNI EN 1303:2007, the cylinder under test "CILINDRO ISEO CHAVE VERTICALE SERIE R" can be marked with the following 8-digit classification rating:

1 2 3 4 5 6 7 8

(*) Check of the actual number of combinations, acceptable dimension and of the maximum number of steps at the same height in the test have been obtained from data supplied by The Customer and not verified by the test sample.

Place on Test Report No. 215127 issued by this Institute on 24/08/2006 on test results of the sample, test equipment, test methods, test results

Test Technician: Massimo, Applied Physics Laboratory (Via San Mauro, 8) - Bellaria-Igna Marina (RN) - Italy
Chairman or Managing Director: Dott. Ing. Vincenzo Lombardi

Stamp: [Stamp] Date: [Date] Page: 1 of 1

ISTITUTO GIORDANO

ABBREVIATED TEST REPORT No. 242802
(Refers to test report No. 215124 issued by this Institute on 24/08/2006)

Place and date of issue: Bellaria-Igna Marina - Italy, 06/07/2008
Customer: ISEO SERRAVALLE S.p.A. - Via San Giordano, 11 - 25015 PISCOONE (BS) - Italy
Date test requested: 15/06/2008
Order number and date: 41873, 01/07/2008
Date sample received: from 03/08/2007 to 03/08/2008
Date of testing: from 03/08/2007 to 06/08/2008
Purpose of test: Testing on lock cylinders in accordance with UNI EN 1303:2007
Test site: Istituto Giordano S.p.A. - Branch 4 - Via San Mauro, 8 - 47014 Bellaria-Igna Marina (RN) - Italy
Origin of sample: supplied and supplied by The Customer
Identification of sample: Nos. 20051307, 20051713, 20051978, 20052227, 20052276, 20060306, 20061438

Sample name:
The sample under test is named "CILINDRO ISEO CHAVE PLATTA BRAVETTA SERIE R"

Standards under reference:
The test was carried out according to standard UNI EN 1303:2007 "Assessment per assessment: Cylinders per assessment. Request a standard of grade" / Testing location: (Indicate in table: Department and/or section)

Test results:
In accordance with testing protocol test, results obtained and specifications of UNI EN 1303:2007, the cylinder under test "CILINDRO ISEO CHAVE PLATTA BRAVETTA SERIE R" can be marked with the following 8-digit classification rating:

1 2 3 4 5 6 7 8

(*) Check of the actual number of combinations, acceptable dimension and of the maximum number of steps at the same height in the test have been obtained from data supplied by The Customer and not verified by the test sample.

Place on Test Report No. 215124 issued by this Institute on 24/08/2006 on test results of the sample, test equipment, test methods, test results

Test Technician: Massimo, Applied Physics Laboratory (Via San Mauro, 8) - Bellaria-Igna Marina (RN) - Italy
Chairman or Managing Director: Dott. Ing. Vincenzo Lombardi

Stamp: [Stamp] Date: [Date] Page: 1 of 1

Cylinders

R50

Code
Status
Single
package
Multiple
package
Min. ord.


R50



R50 "PATENTED" **SINGLE-PROFILE** cylinder, nickel-silver flat key with plasticised head,
11 pins and "PATENTED INSERT" N° EP1106756B1. **PROPERTY CARD**.
Antidrill pin inside the body and the barrel. DIN 8-position cam. **3 KEYS**. 85 mm screw.



	L	C + D	BRASS	NICKEL				
Length mm 40 (30+10)			8A0930107.D	8A0930109.D	D	1	5	5
Length mm 45 (35+10)			8A0935107.D	8A0935109.D	D	1	5	5
Length mm 50 (40+10)			8A0940107.D	8A0940109.D	D	1	5	5
Length mm 55 (45+10)			8A0945107.D	8A0945109.D	D	1	5	5
Length mm 60 (50+10)			8A0950107.D	8A0950109.D	D	1	5	5
Length mm 65 (55+10)			8A0955107.D	8A0955109.D	D	1	5	5
Length mm 70 (60+10)			8A0960107.D	8A0960109.D	D	1	5	5
Length mm 75 (65+10)			8A0965107.D	8A0965109.D	D	1	5	5
Length mm 80 (70+10)			8A0970107.D	8A0970109.D	D	1	5	5
Length mm 85 (75+10)			8A0975107.D	8A0975109.D	D	1	5	5
Length mm 90 (80+10)			8A0980107.D	8A0980109.D	D	1	5	5
Length mm 100 (90+10)			8A0990107.D	8A0990109.D	D	1	-	1



R50 "PATENTED" **SINGLE-PROFILE** cylinder, nickel-silver flat key with plasticised head,
11 pins and "PATENTED INSERT" N° EP1106756B1. **PROPERTY CARD**.
Antidrill pin inside the body and the barrel. DIN 8-position cam. **5 KEYS**. 85 mm screw.




	L	C + D	BRASS	NICKEL				
Length mm 40 (30+10)			8A0930107.D5	8A0930109.D5	C	1	5	5
Length mm 45 (35+10)			8A0935107.D5	8A0935109.D5	D	1	5	5
Length mm 50 (40+10)			8A0940107.D5	8A0940109.D5	D	1	5	5
Length mm 55 (45+10)			8A0945107.D5	8A0945109.D5	D	1	5	5
Length mm 60 (50+10)			8A0950107.D5	8A0950109.D5	D	1	5	5
Length mm 65 (55+10)			8A0955107.D5	8A0955109.D5	D	1	5	5
Length mm 70 (60+10)			8A0960107.D5	8A0960109.D5	D	1	5	5
Length mm 75 (65+10)			8A0965107.D5	8A0965109.D5	D	1	5	5
Length mm 80 (70+10)			8A0970107.D5	8A0970109.D5	D	1	5	5
Length mm 85 (75+10)			8A0975107.D5	8A0975109.D5	D	1	5	5
Length mm 90 (80+10)			8A0980107.D5	8A0980109.D5	D	1	5	5
Length mm 100 (90+10)			8A0990107.D5	8A0990109.D5	D	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.

R50

R50 "PATENTED" **DOUBLE-PROFILE** cylinder, nickel-silver flat key with plasticised head,
11 pins and "PATENTED INSERT" N° EP1106756B1. **PROPERTY CARD**.
Antidrift pin inside the body and the barrel. DIN 30 projecting cam. **3 KEYS**. 85 mm screw.



	L	C + D	BRASS	NICKEL				
Length mm 56 (28+28)			8A0928287.D	8A0928289.D	D	1	5	5
Length mm 61 (28+33)			8A0928337.D	8A0928339.D	D	1	5	5
Length mm 60 (30+30)			8A0930307.D	8A0930309.D	C	1	5	5
Length mm 65 (30+35)			8A0930357.D	8A0930359.D	D	1	5	5
Length mm 70 (30+40)			8A0930407.D	8A0930409.D	D	1	5	5
Length mm 75 (30+45)			8A0930457.D	8A0930459.D	D	1	5	5
Length mm 80 (30+50)			8A0930507.D	8A0930509.D	C	1	5	5
Length mm 85 (30+55)			8A0930557.D	8A0930559.D	D	1	5	5
Length mm 90 (30+60)			8A0930607.D	8A0930609.D	D	1	5	5
Length mm 95 (30+65)			8A0930657.D	8A0930659.D	D	1	-	1
Length mm 100 (30+70)			8A0930707.D	8A0930709.D	D	1	-	1
Length mm 105 (30+75)			8A0930757.D	8A0930759.D	D	1	-	1
Length mm 110 (30+80)			8A0930807.D	8A0930809.D	D	1	-	1
Length mm 115 (30+85)			8A0930857.D	8A0930859.D	D	1	-	1
Length mm 120 (30+90)			8A0930907.D	8A0930909.D	D	1	-	1
Length mm 70 (35+35)			8A0935357.D	8A0935359.D	D	1	5	5
Length mm 75 (35+40)			8A0935407.D	8A0935409.D	D	1	5	5
Length mm 80 (35+45)			8A0935457.D	8A0935459.D	D	1	5	5
Length mm 85 (35+50)			8A0935507.D	8A0935509.D	D	1	5	5
Length mm 90 (35+55)			8A0935557.D	8A0935559.D	D	1	5	5
Length mm 95 (35+60)			8A0935607.D	8A0935609.D	D	1	-	1
Length mm 100 (35+65)			8A0935657.D	8A0935659.D	D	1	-	1
Length mm 105 (35+70)			8A0935707.D	8A0935709.D	D	1	-	1
Length mm 110 (35+75)			8A0935757.D	8A0935759.D	D	1	-	1
Length mm 115 (35+80)			8A0935807.D	8A0935809.D	D	1	-	1
Length mm 120 (35+85)			8A0935857.D	8A0935859.D	D	1	-	1
Length mm 125 (35+90)			8A0935907.D	8A0935909.D	D	1	-	1
Length mm 80 (40+40)			8A0940407.D	8A0940409.D	D	1	5	5
Length mm 85 (40+45)			8A0940457.D	8A0940459.D	D	1	5	5
Length mm 90 (40+50)			8A0940507.D	8A0940509.D	D	1	5	5
Length mm 95 (40+55)			8A0940557.D	8A0940559.D	D	1	-	1
Length mm 100 (40+60)			8A0940607.D	8A0940609.D	D	1	-	1
Length mm 105 (40+65)			8A0940657.D	8A0940659.D	D	1	-	1
Length mm 110 (40+70)			8A0940707.D	8A0940709.D	D	1	-	1
Length mm 115 (40+75)			8A0940757.D	8A0940759.D	D	1	-	1
Length mm 120 (40+80)			8A0940807.D	8A0940809.D	D	1	-	1
Length mm 125 (40+85)			8A0940857.D	8A0940859.D	D	1	-	1
Length mm 130 (40+90)			8A0940907.D	8A0940909.D	D	1	-	1
Length mm 90 (45+45)			8A0945457.D	8A0945459.D	D	1	5	5
Length mm 95 (45+50)			8A0945507.D	8A0945509.D	D	1	-	1
Length mm 100 (45+55)			8A0945557.D	8A0945559.D	D	1	-	1
Length mm 105 (45+60)			8A0945607.D	8A0945609.D	D	1	-	1
Length mm 110 (45+65)			8A0945657.D	8A0945659.D	D	1	-	1
Length mm 115 (45+70)			8A0945707.D	8A0945709.D	D	1	-	1
Length mm 120 (45+75)			8A0945757.D	8A0945759.D	D	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.

R50

L C + D						
	BRASS	NICKEL				
Length mm 125 (45+80)	8A0945807.D	8A0945809.D	D	1	-	1
Length mm 130 (45+85)	8A0945857.D	8A0945859.D	D	1	-	1
Length mm 100 (50+50)	8A0950507.D	8A0950509.D	C	1	-	1
Length mm 105 (50+55)	8A0950557.D	8A0950559.D	D	1	-	1
Length mm 110 (50+60)	8A0950607.D	8A0950609.D	D	1	-	1
Length mm 115 (50+65)	8A0950657.D	8A0950659.D	D	1	-	1
Length mm 120 (50+70)	8A0950707.D	8A0950709.D	D	1	-	1
Length mm 125 (50+75)	8A0950757.D	8A0950759.D	D	1	-	1
Length mm 130 (50+80)	8A0950807.D	8A0950809.D	D	1	-	1
Length mm 110 (55+55)	8A0955557.D	8A0955559.D	D	1	-	1
Length mm 115 (55+60)	8A0955607.D	8A0955609.D	D	1	-	1
Length mm 120 (55+65)	8A0955657.D	8A0955659.D	D	1	-	1
Length mm 125 (55+70)	8A0955707.D	8A0955709.D	D	1	-	1
Length mm 120 (60+60)	8A0960607.D	8A0960609.D	D	1	-	1
Length mm 125 (60+65)	8A0960657.D	8A0960659.D	D	1	-	1
Length mm 130 (60+70)	8A0960707.D	8A0960709.D	D	1	-	1

R50 "PATENTED" **DOUBLE-PROFILE** cylinder, nickel-silver flat key with plasticised head,
11 pins and "PATENTED INSERT" N° EP1106756B1. **PROPERTY CARD.**
Antidrill pin inside the body and the barrel. DIN 30 projecting cam. **5 KEYS.** 85 mm screw.



L C + D						
	BRASS	NICKEL				
Length mm 56 (28+28)	8A0928287.D5	8A0928289.D5	C	1	5	5
Length mm 61 (28+33)	8A0928337.D5	8A0928339.D5	D	1	5	5
Length mm 60 (30+30)	8A0930307.D5	8A0930309.D5	B	1	5	5
Length mm 65 (30+35)	8A0930357.D5	8A0930359.D5	D	1	5	5
Length mm 70 (30+40)	8A0930407.D5	8A0930409.D5	B	1	5	5
Length mm 75 (30+45)	8A0930457.D5	8A0930459.D5	C	1	5	5
Length mm 80 (30+50)	8A0930507.D5	8A0930509.D5	B	1	5	5
Length mm 85 (30+55)	8A0930557.D5	8A0930559.D5	D	1	5	5
Length mm 90 (30+60)	8A0930607.D5	8A0930609.D5	C	1	5	5
Length mm 95 (30+65)	8A0930657.D5	8A0930659.D5	D	1	-	1
Length mm 100 (30+70)	8A0930707.D5	8A0930709.D5	C	1	-	1
Length mm 105 (30+75)	8A0930757.D5	8A0930759.D5	D	1	-	1
Length mm 110 (30+80)	8A0930807.D5	8A0930809.D5	D	1	-	1
Length mm 115 (30+85)	8A0930857.D5	8A0930859.D5	D	1	-	1
Length mm 120 (30+90)	8A0930907.D5	8A0930909.D5	D	1	-	1
Length mm 70 (35+35)	8A0935357.D5	8A0935359.D5	C	1	5	5
Length mm 75 (35+40)	8A0935407.D5	8A0935409.D5	C	1	5	5
Length mm 80 (35+45)	8A0935457.D5	8A0935459.D5	C	1	5	5
Length mm 85 (35+50)	8A0935507.D5	8A0935509.D5	C	1	5	5
Length mm 90 (35+55)	8A0935557.D5	8A0935559.D5	C	1	5	5
Length mm 95 (35+60)	8A0935607.D5	8A0935609.D5	D	1	-	1
Length mm 100 (35+65)	8A0935657.D5	8A0935659.D5	D	1	-	1
Length mm 105 (35+70)	8A0935707.D5	8A0935709.D5	D	1	-	1
Length mm 110 (35+75)	8A0935757.D5	8A0935759.D5	D	1	-	1
Length mm 115 (35+80)	8A0935807.D5	8A0935809.D5	D	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.

R50




L C + D

BRASS

NICKEL



Length mm 120 (35+85)	8A0935857.D5	8A0935859.D5	D	1	-	1
Length mm 125 (35+90)	8A0935907.D5	8A0935909.D5	D	1	-	1
Length mm 80 (40+40)	8A0940407.D5	8A0940409.D5	C	1	5	5
Length mm 85 (40+45)	8A0940457.D5	8A0940459.D5	B	1	5	5
Length mm 90 (40+50)	8A0940507.D5	8A0940509.D5	B	1	5	5
Length mm 95 (40+55)	8A0940557.D5	8A0940559.D5	B	1	-	1
Length mm 100 (40+60)	8A0940607.D5	8A0940609.D5	C	1	-	1
Length mm 105 (40+65)	8A0940657.D5	8A0940659.D5	D	1	-	1
Length mm 110 (40+70)	8A0940707.D5	8A0940709.D5	D	1	-	1
Length mm 115 (40+75)	8A0940757.D5	8A0940759.D5	D	1	-	1
Length mm 120 (40+80)	8A0940807.D5	8A0940809.D5	D	1	-	1
Length mm 125 (40+85)	8A0940857.D5	8A0940859.D5	D	1	-	1
Length mm 130 (40+90)	8A0940907.D5	8A0940909.D5	D	1	-	1
Length mm 90 (45+45)	8A0945457.D5	8A0945459.D5	D	1	5	5
Length mm 95 (45+50)	8A0945507.D5	8A0945509.D5	D	1	-	1
Length mm 100 (45+55)	8A0945557.D5	8A0945559.D5	D	1	-	1
Length mm 105 (45+60)	8A0945607.D5	8A0945609.D5	D	1	-	1
Length mm 110 (45+65)	8A0945657.D5	8A0945659.D5	D	1	-	1
Length mm 115 (45+70)	8A0945707.D5	8A0945709.D5	D	1	-	1
Length mm 120 (45+75)	8A0945757.D5	8A0945759.D5	D	1	-	1
Length mm 125 (45+80)	8A0945807.D5	8A0945809.D5	D	1	-	1
Length mm 130 (45+85)	8A0945857.D5	8A0945859.D5	D	1	-	1
Length mm 100 (50+50)	8A0950507.D5	8A0950509.D5	D	1	-	1
Length mm 105 (50+55)	8A0950557.D5	8A0950559.D5	D	1	-	1
Length mm 110 (50+60)	8A0950607.D5	8A0950609.D5	D	1	-	1
Length mm 115 (50+65)	8A0950657.D5	8A0950659.D5	D	1	-	1
Length mm 120 (50+70)	8A0950707.D5	8A0950709.D5	D	1	-	1
Length mm 125 (50+75)	8A0950757.D5	8A0950759.D5	D	1	-	1
Length mm 130 (50+80)	8A0950807.D5	8A0950809.D5	D	1	-	1
Length mm 110 (55+55)	8A0955557.D5	8A0955559.D5	D	1	-	1
Length mm 115 (55+60)	8A0955607.D5	8A0955609.D5	D	1	-	1
Length mm 120 (55+65)	8A0955657.D5	8A0955659.D5	D	1	-	1
Length mm 125 (55+70)	8A0955707.D5	8A0955709.D5	D	1	-	1
Length mm 120 (60+60)	8A0960607.D5	8A0960609.D5	D	1	-	1
Length mm 125 (60+65)	8A0960657.D5	8A0960659.D5	D	1	-	1
Length mm 130 (60+70)	8A0960707.D5	8A0960709.D5	D	1	-	1



Code
Status
Single
package
Multiple
package
Min. ord.

R50

R50 "PATENTED" **DOUBLE-PROFILE** cylinder, nickel-silver flat key with plasticised head,
11 pins and "PATENTED INSERT" N° EP1106756B1. **DOUBLE FUNCTION**, it also operates when keyed-in. **PROPERTY CARD**.
Antidrill pin inside the body and the barrel. DIN 30 projecting cam. **3 KEYS**. 85 mm screw.

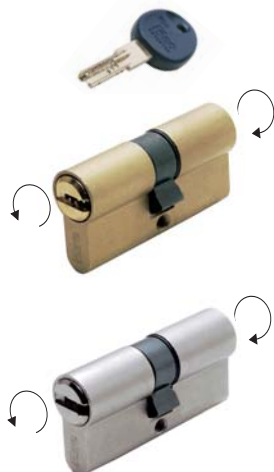

	L	C + D		BRASS	NICKEL				
Length mm 60 (30+30)				8A9930307.D	8A9930309.D	D	1	5	5
Length mm 65 (30+35)				8A9930357.D	8A9930359.D	D	1	5	5
Length mm 70 (30+40)				8A9930407.D	8A9930409.D	D	1	5	5
Length mm 75 (30+45)				8A9930457.D	8A9930459.D	D	1	5	5
Length mm 80 (30+50)				8A9930507.D	8A9930509.D	D	1	5	5
Length mm 85 (30+55)				8A9930557.D	8A9930559.D	D	1	5	5
Length mm 90 (30+60)				8A9930607.D	8A9930609.D	D	1	5	5
Length mm 95 (30+65)				8A9930657.D	8A9930659.D	D	1	-	1
Length mm 100 (30+70)				8A9930707.D	8A9930709.D	D	1	-	1
Length mm 105 (30+75)				8A9930757.D	8A9930759.D	D	1	-	1
Length mm 110 (30+80)				8A9930807.D	8A9930809.D	D	1	-	1
Length mm 115 (30+85)				8A9930857.D	8A9930859.D	D	1	-	1
Length mm 120 (30+90)				8A9930907.D	8A9930909.D	D	1	-	1
Length mm 70 (35+35)				8A9935357.D	8A9935359.D	D	1	5	5
Length mm 75 (35+40)				8A9935407.D	8A9935409.D	D	1	5	5
Length mm 80 (35+45)				8A9935457.D	8A9935459.D	D	1	5	5
Length mm 85 (35+50)				8A9935507.D	8A9935509.D	D	1	5	5
Length mm 90 (35+55)				8A9935557.D	8A9935559.D	D	1	5	5
Length mm 95 (35+60)				8A9935607.D	8A9935609.D	D	1	-	1
Length mm 100 (35+65)				8A9935657.D	8A9935659.D	D	1	-	1
Length mm 105 (35+70)				8A9935707.D	8A9935709.D	D	1	-	1
Length mm 110 (35+75)				8A9935757.D	8A9935759.D	D	1	-	1
Length mm 115 (35+80)				8A9935807.D	8A9935809.D	D	1	-	1
Length mm 120 (35+85)				8A9935857.D	8A9935859.D	D	1	-	1
Length mm 125 (35+90)				8A9935907.D	8A9935909.D	D	1	-	1
Length mm 80 (40+40)				8A9940407.D	8A9940409.D	D	1	5	5
Length mm 85 (40+45)				8A9940457.D	8A9940459.D	D	1	5	5
Length mm 90 (40+50)				8A9940507.D	8A9940509.D	D	1	5	5
Length mm 95 (40+55)				8A9940557.D	8A9940559.D	D	1	-	1
Length mm 100 (40+60)				8A9940607.D	8A9940609.D	D	1	-	1
Length mm 105 (40+65)				8A9940657.D	8A9940659.D	D	1	-	1
Length mm 110 (40+70)				8A9940707.D	8A9940709.D	D	1	-	1
Length mm 115 (40+75)				8A9940757.D	8A9940759.D	D	1	-	1
Length mm 120 (40+80)				8A9940807.D	8A9940809.D	D	1	-	1
Length mm 125 (40+85)				8A9940857.D	8A9940859.D	D	1	-	1
Length mm 130 (40+90)				8A9940907.D	8A9940909.D	D	1	-	1
Length mm 90 (45+45)				8A9945457.D	8A9945459.D	D	1	5	5
Length mm 95 (45+50)				8A9945507.D	8A9945509.D	D	1	-	1
Length mm 100 (45+55)				8A9945557.D	8A9945559.D	D	1	-	1
Length mm 105 (45+60)				8A9945607.D	8A9945609.D	D	1	-	1
Length mm 110 (45+65)				8A9945657.D	8A9945659.D	D	1	-	1
Length mm 115 (45+70)				8A9945707.D	8A9945709.D	D	1	-	1
Length mm 120 (45+75)				8A9945757.D	8A9945759.D	D	1	-	1
Length mm 125 (45+80)				8A9945807.D	8A9945809.D	D	1	-	1
Length mm 130 (45+85)				8A9945857.D	8A9945859.D	D	1	-	1

R50

Code
Status
Single
package
Multiple
package
Min. ord.

L C + D						
Length mm 100 (50+50)		BRASS 8A9950507.D	NICKEL 8A9950509.D	D	1	- 1
Length mm 105 (50+55)		8A9950557.D	8A9950559.D	D	1	- 1
Length mm 110 (50+60)		8A9950607.D	8A9950609.D	D	1	- 1
Length mm 115 (50+65)		8A9950657.D	8A9950659.D	D	1	- 1
Length mm 120 (50+70)		8A9950707.D	8A9950709.D	D	1	- 1
Length mm 125 (50+75)		8A9950757.D	8A9950759.D	D	1	- 1
Length mm 130 (50+80)		8A9950807.D	8A9950809.D	D	1	- 1
Length mm 110 (55+55)		8A9955557.D	8A9955559.D	D	1	- 1
Length mm 115 (55+60)		8A9955607.D	8A9955609.D	D	1	- 1
Length mm 120 (55+65)		8A9955657.D	8A9955659.D	D	1	- 1
Length mm 125 (55+70)		8A9955707.D	8A9955709.D	D	1	- 1
Length mm 120 (60+60)		8A9960607.D	8A9960609.D	D	1	- 1
Length mm 125 (60+65)		8A9960657.D	8A9960659.D	D	1	- 1
Length mm 130 (60+70)		8A9960707.D	8A9960709.D	D	1	- 1

R50 "PATENTED" **DOUBLE-PROFILE** cylinder, nickel-silver flat key with plasticised head,
11 pins and "PATENTED INSERT" N° EP1106756B1. **DOUBLE FUNCTION**, it also operates when keyed-in.
PROPERTY CARD. Antidrill pin inside the body and the barrel. DIN 30 projecting cam. **5 KEYS**.
85 mm screw. (key blank code: 020990H).



L C + D						
Length mm 60 (30+30)		BRASS 8A9930307.D5	NICKEL 8A9930309.D5	C	1	5 5
Length mm 65 (30+35)		8A9930357.D5	8A9930359.D5	C	1	5 5
Length mm 70 (30+40)		8A9930407.D5	8A9930409.D5	C	1	5 5
Length mm 75 (30+45)		8A9930457.D5	8A9930459.D5	C	1	5 5
Length mm 80 (30+50)		8A9930507.D5	8A9930509.D5	C	1	5 5
Length mm 85 (30+55)		8A9930557.D5	8A9930559.D5	D	1	5 5
Length mm 90 (30+60)		8A9930607.D5	8A9930609.D5	D	1	5 5
Length mm 95 (30+65)		8A9930657.D5	8A9930659.D5	D	1	- 1
Length mm 100 (30+70)		8A9930707.D5	8A9930709.D5	D	1	- 1
Length mm 105 (30+75)		8A9930757.D5	8A9930759.D5	D	1	- 1
Length mm 110 (30+80)		8A9930807.D5	8A9930809.D5	D	1	- 1
Length mm 115 (30+85)		8A9930857.D5	8A9930859.D5	D	1	- 1
Length mm 120 (30+90)		8A9930907.D5	8A9930909.D5	D	1	- 1
Length mm 70 (35+35)		8A9935357.D5	8A9935359.D5	A	1	5 5
Length mm 75 (35+40)		8A9935407.D5	8A9935409.D5	C	1	5 5
Length mm 80 (35+45)		8A9935457.D5	8A9935459.D5	C	1	5 5
Length mm 85 (35+50)		8A9935507.D5	8A9935509.D5	D	1	5 5
Length mm 90 (35+55)		8A9935557.D5	8A9935559.D5	D	1	5 5
Length mm 95 (35+60)		8A9935607.D5	8A9935609.D5	D	1	- 1
Length mm 100 (35+65)		8A9935657.D5	8A9935659.D5	D	1	- 1
Length mm 105 (35+70)		8A9935707.D5	8A9935709.D5	D	1	- 1
Length mm 110 (35+75)		8A9935757.D5	8A9935759.D5	D	1	- 1
Length mm 115 (35+80)		8A9935807.D5	8A9935809.D5	D	1	- 1
Length mm 120 (35+85)		8A9935857.D5	8A9935859.D5	D	1	- 1
Length mm 125 (35+90)		8A9935907.D5	8A9935909.D5	D	1	- 1
Length mm 80 (40+40)		8A9940407.D5	8A9940409.D5	C	1	5 5

		Code		Status	Single package	Multiple package	Min. ord.
							
L	C + D	BRASS	NICKEL				
Length mm 85 (40+45)		8A9940457.D5	8A9940459.D5	D	1	5	5
Length mm 90 (40+50)		8A9940507.D5	8A9940509.D5	B	1	5	5
Length mm 95 (40+55)		8A9940557.D5	8A9940559.D5	D	1	-	1
Length mm 100 (40+60)		8A9940607.D5	8A9940609.D5	C	1	-	1
Length mm 105 (40+65)		8A9940657.D5	8A9940659.D5	D	1	-	1
Length mm 110 (40+70)		8A9940707.D5	8A9940709.D5	D	1	-	1
Length mm 115 (40+75)		8A9940757.D5	8A9940759.D5	D	1	-	1
Length mm 120 (40+80)		8A9940807.D5	8A9940809.D5	D	1	-	1
Length mm 125 (40+85)		8A9940857.D5	8A9940859.D5	D	1	-	1
Length mm 130 (40+90)		8A9940907.D5	8A9940909.D5	D	1	-	1
Length mm 90 (45+45)		8A9945457.D5	8A9945459.D5	D	1	5	5
Length mm 95 (45+50)		8A9945507.D5	8A9945509.D5	D	1	-	1
Length mm 100 (45+55)		8A9945557.D5	8A9945559.D5	D	1	-	1
Length mm 105 (45+60)		8A9945607.D5	8A9945609.D5	D	1	-	1
Length mm 110 (45+65)		8A9945657.D5	8A9945659.D5	D	1	-	1
Length mm 115 (45+70)		8A9945707.D5	8A9945709.D5	D	1	-	1
Length mm 120 (45+75)		8A9945757.D5	8A9945759.D5	D	1	-	1
Length mm 125 (45+80)		8A9945807.D5	8A9945809.D5	D	1	-	1
Length mm 130 (45+85)		8A9945857.D5	8A9945859.D5	D	1	-	1
Length mm 100 (50+50)		8A9950507.D5	8A9950509.D5	D	1	-	1
Length mm 105 (50+55)		8A9950557.D5	8A9950559.D5	D	1	-	1
Length mm 110 (50+60)		8A9950607.D5	8A9950609.D5	C	1	-	1
Length mm 115 (50+65)		8A9950657.D5	8A9950659.D5	D	1	-	1
Length mm 120 (50+70)		8A9950707.D5	8A9950709.D5	D	1	-	1
Length mm 125 (50+75)		8A9950757.D5	8A9950759.D5	D	1	-	1
Length mm 130 (50+80)		8A9950807.D5	8A9950809.D5	D	1	-	1
Length mm 110 (55+55)		8A9955557.D5	8A9955559.D5	D	1	-	1
Length mm 115 (55+60)		8A9955607.D5	8A9955609.D5	D	1	-	1
Length mm 120 (55+65)		8A9955657.D5	8A9955659.D5	D	1	-	1
Length mm 125 (55+70)		8A9955707.D5	8A9955709.D5	D	1	-	1
Length mm 120 (60+60)		8A9960607.D5	8A9960609.D5	D	1	-	1
Length mm 125 (60+65)		8A9960657.D5	8A9960659.D5	D	1	-	1
Length mm 130 (60+70)		8A9960707.D5	8A9960709.D5	D	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.

R50





R50 "PATENTED" **EUROPEAN PROFILE** cylinder with **D8X75 SHAFT** preset for internal knob and nickel-silver flat key with plasticised head, 11 pins and "PATENTED INSERT" N° EP1106756B1.

PROPERTY CARD. Antidrill pin inside the body and the barrel. DIN 30 projecting cam. **3 KEYS.**

85 mm screw.



	L	C + D					
			OTTONE	NICHELATO			
Body length mm 60 (knob 30+30)			8A69D0307.D	8A69D0309.D	C	1	5 5
Body length mm 65 (knob 30+35)			8A69D0357.D	8A69D0359.D	D	1	5 5
Body length mm 70 (knob 30+40)			8A69D0407.D	8A69D0409.D	D	1	5 5
Body length mm 75 (knob 30+45)			8A69D0457.D	8A69D0459.D	D	1	5 5
Body length mm 80 (knob 30+50)			8A69D0507.D	8A69D0509.D	D	1	5 5
Body length mm 90 (knob 30+60)			8A69D0607.D	8A69D0609.D	D	1	5 5
Body length mm 100 (knob 30+70)			8A69D0707.D	8A69D0709.D	D	1	- 1



R50 "PATENTED" **EUROPEAN PROFILE** cylinder with **D8X75 SHAFT** preset for internal knob and nickel-silver flat key with plasticised head, 11 pins and "PATENTED INSERT" N° EP1106756B1 external.

PROPERTY CARD. Antidrill pin inside the body and the barrel. DIN 30 projecting cam. **5 KEYS.**

85 mm screw.



	L	C + D					
			OTTONE	NICHELATO			
Body length mm 60 (knob 30+30)			8A69D0307.D5	8A69D0309.D5	B	1	5 5
Body length mm 65 (knob 30+35)			8A69D0357.D5	8A69D0359.D5	D	1	5 5
Body length mm 70 (knob 30+40)			8A69D0407.D5	8A69D0409.D5	B	1	5 5
Body length mm 80 (knob 30+50)			8A69D0507.D5	8A69D0509.D5	B	1	5 5
Body length mm 90 (knob 30+60)			8A69D0607.D5	8A69D0609.D5	C	1	5 5
Body length mm 100 (knob 30+70)			8A69D0707.D5	8A69D0709.D5	D	1	- 1

Code
Status
Single
package
Multiple
package
Min. ord.


R50

R50 "PATENTED" **EUROPEAN PROFILE** cylinder with **D8X16 SHAFT** preset for internal knob and nickel-silver flat key with plasticised head, 11 pins and

"PATENTED INSERT" N° EP1106756B1 external. **PROPERTY CARD.**

Antidrill pin inside the body and the barrel. DIN 30 projecting cam. **3 KEYS.**

85 mm screw.



L	C + D	BRASS	NICKEL	D	1	5	5
Length mm 56 (knob 28+28)		8A6928287.D	8A6928289.D	D	1	5	5
Length mm 61 (knob 28+33)		8A6928337.D	8A6928339.D	D	1	5	5
Length mm 60 (knob 30+30)		8A6930307.D	8A6930309.D	D	1	5	5
Length mm 65 (knob 30+35)		8A6930357.D	8A6930359.D	D	1	5	5
Length mm 70 (knob 30+40)		8A6930407.D	8A6930409.D	D	1	5	5
Length mm 75 (knob 30+45)		8A6930457.D	8A6930459.D	D	1	5	5
Length mm 80 (knob 30+50)		8A6930507.D	8A6930509.D	D	1	5	5
Length mm 85 (knob 30+55)		8A6930557.D	8A6930559.D	D	1	5	5
Length mm 90 (knob 30+60)		8A6930607.D	8A6930609.D	D	1	5	5
Length mm 95 (knob 30+65)		8A6930657.D	8A6930659.D	D	1	-	1
Length mm 100 (knob 30+70)		8A6930707.D	8A6930709.D	D	1	-	1
Length mm 105 (knob 30+75)		8A6930757.D	8A6930759.D	D	1	-	1
Length mm 110 (knob 30+80)		8A6930807.D	8A6930809.D	D	1	-	1
Length mm 115 (knob 30+85)		8A6930857.D	8A6930859.D	D	1	-	1
Length mm 120 (knob 30+90)		8A6930907.D	8A6930909.D	D	1	-	1
Length mm 70 (knob 35+35)		8A6935357.D	8A6935359.D	D	1	5	5
Length mm 75 (knob 35+40)		8A6935407.D	8A6935409.D	D	1	5	5
Length mm 80 (knob 35+45)		8A6935457.D	8A6935459.D	D	1	5	5
Length mm 85 (knob 35+50)		8A6935507.D	8A6935509.D	D	1	5	5
Length mm 90 (knob 35+55)		8A6935557.D	8A6935559.D	D	1	5	5
Length mm 95 (knob 35+60)		8A6935607.D	8A6935609.D	D	1	-	1
Length mm 100 (knob 35+65)		8A6935657.D	8A6935659.D	D	1	-	1
Length mm 105 (knob 35+70)		8A6935707.D	8A6935709.D	D	1	-	1
Length mm 110 (knob 35+75)		8A6935757.D	8A6935759.D	D	1	-	1
Length mm 115 (knob 35+80)		8A6935807.D	8A6935809.D	D	1	-	1
Length mm 120 (knob 35+85)		8A6935857.D	8A6935859.D	D	1	-	1
Length mm 125 (knob 35+90)		8A6935907.D	8A6935909.D	D	1	-	1
Length mm 80 (knob 40+40)		8A6940407.D	8A6940409.D	D	1	5	5
Length mm 85 (knob 40+45)		8A6940457.D	8A6940459.D	D	1	5	5
Length mm 90 (knob 40+50)		8A6940507.D	8A6940509.D	D	1	5	5
Length mm 95 (knob 40+55)		8A6940557.D	8A6940559.D	D	1	-	1
Length mm 100 (knob 40+60)		8A6940607.D	8A6940609.D	D	1	-	1
Length mm 105 (knob 40+65)		8A6940657.D	8A6940659.D	D	1	-	1
Length mm 110 (knob 40+70)		8A6940707.D	8A6940709.D	D	1	-	1
Length mm 115 (knob 40+75)		8A6940757.D	8A6940759.D	D	1	-	1
Length mm 120 (knob 40+80)		8A6940807.D	8A6940809.D	D	1	-	1
Length mm 125 (knob 40+85)		8A6940857.D	8A6940859.D	D	1	-	1
Length mm 130 (knob 40+90)		8A6940907.D	8A6940909.D	D	1	-	1
Length mm 90 (knob 45+45)		8A6945457.D	8A6945459.D	D	1	5	5
Length mm 95 (knob 45+50)		8A6945507.D	8A6945509.D	D	1	-	1
Length mm 100 (knob 45+55)		8A6945557.D	8A6945559.D	D	1	-	1
Length mm 105 (knob 45+60)		8A6945607.D	8A6945609.D	D	1	-	1
Length mm 110 (knob 45+65)		8A6945657.D	8A6945659.D	D	1	-	1
Length mm 115 (knob 45+70)		8A6945707.D	8A6945709.D	D	1	-	1

R50

Code
Status
Single
package
Multiple
package
Min. ord.

L	C + D						
Length mm 120 (knob 45+75)		BRASS	NICKEL				
		8A6945757.D	8A6945759.D	D	1	-	1
Length mm 125 (knob 45+80)		8A6945807.D	8A6945809.D	D	1	-	1
Length mm 130 (knob 45+85)		8A6945857.D	8A6945859.D	D	1	-	1
Length mm 100 (knob 50+50)		8A6950507.D	8A6950509.D	D	1	-	1
Length mm 105 (knob 50+55)		8A6950557.D	8A6950559.D	D	1	-	1
Length mm 110 (knob 50+60)		8A6950607.D	8A6950609.D	D	1	-	1
Length mm 115 (knob 50+65)		8A6950657.D	8A6950659.D	D	1	-	1
Length mm 120 (knob 50+70)		8A6950707.D	8A6950709.D	D	1	-	1
Length mm 125 (knob 50+75)		8A6950757.D	8A6950759.D	D	1	-	1
Length mm 130 (knob 50+80)		8A6950807.D	8A6950809.D	D	1	-	1
Length mm 110 (knob 55+55)		8A6955557.D	8A6955559.D	D	1	-	1
Length mm 115 (knob 55+60)		8A6955607.D	8A6955609.D	D	1	-	1
Length mm 120 (knob 55+65)		8A6955657.D	8A6955659.D	D	1	-	1
Length mm 125 (knob 55+70)		8A6955707.D	8A6955709.D	D	1	-	1
Length mm 130 (knob 55+75)		8A6955757.D	8A6955759.D	D	1	-	1
Length mm 120 (knob 60+60)		8A6960607.D	8A6960609.D	D	1	-	1
Length mm 125 (knob 60+65)		8A6960657.D	8A6960659.D	D	1	-	1
Length mm 130 (knob 60+70)		8A6960707.D	8A6960709.D	D	1	-	1

R50 "PATENTED" **EUROPEAN PROFILE** cylinder with **D8X16 SHAFT** preset for internal knob and nickel-silver flat key with plasticised head, 11 pins and

"PATENTED INSERT" N° EP1106756B1 external. **PROPERTY CARD.**

Antidrill pin inside the body and the barrel. DIN 30 projecting cam. **5 KEYS.**

85 mm screw.

L	C + D						
Length mm 56 (knob 28+28)		BRASS	NICKEL				
		8A6928287.D5	8A6928289.D5	D	1	5	5
Length mm 61 (knob 28+33)		8A6928337.D5	8A6928339.D5	D	1	5	5
Length mm 60 (knob 30+30)		8A6930307.D5	8A6930309.D5	D	1	5	5
Length mm 65 (knob 30+35)		8A6930357.D5	8A6930359.D5	D	1	5	5
Length mm 70 (knob 30+40)		8A6930407.D5	8A6930409.D5	D	1	5	5
Length mm 75 (knob 30+45)		8A6930457.D5	8A6930459.D5	D	1	5	5
Length mm 80 (knob 30+50)		8A6930507.D5	8A6930509.D5	D	1	5	5
Length mm 85 (knob 30+55)		8A6930557.D5	8A6930559.D5	D	1	5	5
Length mm 90 (knob 30+60)		8A6930607.D5	8A6930609.D5	D	1	5	5
Length mm 95 (knob 30+65)		8A6930657.D5	8A6930659.D5	D	1	-	1
Length mm 100 (knob 30+70)		8A6930707.D5	8A6930709.D5	D	1	-	1
Length mm 105 (knob 30+75)		8A6930757.D5	8A6930759.D5	D	1	-	1
Length mm 110 (knob 30+80)		8A6930807.D5	8A6930809.D5	D	1	-	1
Length mm 115 (knob 30+85)		8A6930857.D5	8A6930859.D5	D	1	-	1
Length mm 120 (knob 30+90)		8A6930907.D5	8A6930909.D5	D	1	-	1
Length mm 70 (knob 35+35)		8A6935357.D5	8A6935359.D5	D	1	5	5
Length mm 75 (knob 35+40)		8A6935407.D5	8A6935409.D5	D	1	5	5
Length mm 80 (knob 35+45)		8A6935457.D5	8A6935459.D5	D	1	5	5
Length mm 85 (knob 35+50)		8A6935507.D5	8A6935509.D5	D	1	5	5
Length mm 90 (knob 35+55)		8A6935557.D5	8A6935559.D5	D	1	5	5
Length mm 95 (knob 35+60)		8A6935607.D5	8A6935609.D5	D	1	-	1



R50

|--|


Code
Status
Single package
Multiple package
Min. ord.

R50

R50 "PATENTED" **EUROPEAN PROFILE** cylinder with internal **ROUND KNOB** and nickel-silver flat key with plasticised head, 11 pins and "PATENTED INSERT" N° EP1106756B1 external.

PROPERTY CARD. Antidrill pin inside the body and the barrel. DIN 30 projecting cam. **3 KEYS.**

85 mm screw.



L	C + D	BRASS	NICKEL				
Length mm 56 (knob 28+28)		8A8928287.D	8A8928289.D	D	1	5	5
Length mm 61 (knob 28+33)		8A8928337.D	8A8928339.D	D	1	5	5
Length mm 60 (knob 30+30)		8A8930307.D	8A8930309.D	D	1	5	5
Length mm 65 (knob 30+35)		8A8930357.D	8A8930359.D	D	1	5	5
Length mm 70 (knob 30+40)		8A8930407.D	8A8930409.D	D	1	5	5
Length mm 75 (knob 30+45)		8A8930457.D	8A8930459.D	D	1	5	5
Length mm 80 (knob 30+50)		8A8930507.D	8A8930509.D	D	1	5	5
Length mm 85 (knob 30+55)		8A8930557.D	8A8930559.D	D	1	5	5
Length mm 90 (knob 30+60)		8A8930607.D	8A8930609.D	D	1	5	5
Length mm 95 (knob 30+65)		8A8930657.D	8A8930659.D	D	1	-	1
Length mm 100 (knob 30+70)		8A8930707.D	8A8930709.D	D	1	-	1
Length mm 105 (knob 30+75)		8A8930757.D	8A8930759.D	D	1	-	1
Length mm 110 (knob 30+80)		8A8930807.D	8A8930809.D	D	1	-	1
Length mm 115 (knob 30+85)		8A8930857.D	8A8930859.D	D	1	-	1
Length mm 120 (knob 30+90)		8A8930907.D	8A8930909.D	D	1	-	1
Length mm 65 (knob 35+30)		8A8935307.D	8A8935309.D	D	1	5	5
Length mm 70 (knob 35+35)		8A8935357.D	8A8935359.D	D	1	5	5
Length mm 75 (knob 35+40)		8A8935407.D	8A8935409.D	D	1	5	5
Length mm 80 (knob 35+45)		8A8935457.D	8A8935459.D	D	1	5	5
Length mm 85 (knob 35+50)		8A8935507.D	8A8935509.D	D	1	5	5
Length mm 90 (knob 35+55)		8A8935557.D	8A8935559.D	D	1	5	5
Length mm 95 (knob 35+60)		8A8935607.D	8A8935609.D	D	1	-	1
Length mm 100 (knob 35+65)		8A8935657.D	8A8935659.D	D	1	-	1
Length mm 105 (knob 35+70)		8A8935707.D	8A8935709.D	D	1	-	1
Length mm 110 (knob 35+75)		8A8935757.D	8A8935759.D	D	1	-	1
Length mm 115 (knob 35+80)		8A8935807.D	8A8935809.D	D	1	-	1
Length mm 120 (knob 35+85)		8A8935857.D	8A8935859.D	D	1	-	1
Length mm 125 (knob 35+90)		8A8935907.D	8A8935909.D	D	1	-	1
Length mm 70 (knob 40+30)		8A8940307.D	8A8940309.D	D	1	5	5
Length mm 80 (knob 40+40)		8A8940407.D	8A8940409.D	D	1	5	5
Length mm 85 (knob 40+45)		8A8940457.D	8A8940459.D	D	1	5	5
Length mm 90 (knob 40+50)		8A8940507.D	8A8940509.D	D	1	5	5
Length mm 95 (knob 40+55)		8A8940557.D	8A8940559.D	D	1	-	1
Length mm 100 (knob 40+60)		8A8940607.D	8A8940609.D	D	1	-	1
Length mm 105 (knob 40+65)		8A8940657.D	8A8940659.D	D	1	-	1
Length mm 110 (knob 40+70)		8A8940707.D	8A8940709.D	D	1	-	1
Length mm 115 (knob 40+75)		8A8940757.D	8A8940759.D	D	1	-	1
Length mm 120 (knob 40+80)		8A8940807.D	8A8940809.D	D	1	-	1
Length mm 125 (knob 40+85)		8A8940857.D	8A8940859.D	D	1	-	1
Length mm 130 (knob 40+90)		8A8940907.D	8A8940909.D	D	1	-	1
Length mm 75 (knob 45+30)		8A8945307.D	8A8945309.D	D	1	5	5
Length mm 90 (knob 45+45)		8A8945457.D	8A8945459.D	D	1	5	5
Length mm 95 (knob 45+50)		8A8945507.D	8A8945509.D	D	1	-	1
Length mm 100 (knob 45+55)		8A8945557.D	8A8945559.D	D	1	-	1
Length mm 105 (knob 45+60)		8A8945607.D	8A8945609.D	D	1	-	1
Length mm 110 (knob 45+65)		8A8945657.D	8A8945659.D	D	1	-	1
Length mm 115 (knob 45+70)		8A8945707.D	8A8945709.D	D	1	-	1


R50

Code
Status
Single
package
Multiple
package
Min. ord.

L	C + D						
		BRASS	NICKEL				
Length mm 120 (knob 45+75)		8A8945757.D	8A8945759.D	D	1	-	1
Length mm 125 (knob 45+80)		8A8945807.D	8A8945809.D	D	1	-	1
Length mm 130 (knob 45+85)		8A8945857.D	8A8945859.D	D	1	-	1
Length mm 80 (knob 50+30)		8A8950307.D	8A8950309.D	D	5	-	5
Length mm 85 (knob 50+35)		8A8950357.D	8A8950359.D	D	5	-	5
Length mm 90 (knob 50+40)		8A8950407.D	8A8950409.D	D	5	-	5
Length mm 100 (knob 50+50)		8A8950507.D	8A8950509.D	D	1	-	1
Length mm 105 (knob 50+55)		8A8950557.D	8A8950559.D	D	1	-	1
Length mm 110 (knob 50+60)		8A8950607.D	8A8950609.D	D	1	-	1
Length mm 115 (knob 50+65)		8A8950657.D	8A8950659.D	D	1	-	1
Length mm 120 (knob 50+70)		8A8950707.D	8A8950709.D	D	1	-	1
Length mm 125 (knob 50+75)		8A8950757.D	8A8950759.D	D	1	-	1
Length mm 130 (knob 50+80)		8A8950807.D	8A8950809.D	D	1	-	1
Length mm 110 (knob 55+55)		8A8955557.D	8A8955559.D	D	1	-	1
Length mm 115 (knob 55+60)		8A8955607.D	8A8955609.D	D	1	-	1
Length mm 120 (knob 55+65)		8A8955657.D	8A8955659.D	D	1	-	1
Length mm 125 (knob 55+70)		8A8955707.D	8A8955709.D	D	1	-	1
Length mm 130 (knob 55+75)		8A8955757.D	8A8955759.D	D	1	-	1
Length mm 120 (knob 60+60)		8A8960607.D	8A8960609.D	D	1	-	1
Length mm 125 (knob 60+65)		8A8960657.D	8A8960659.D	D	1	-	1
Length mm 130 (knob 60+70)		8A8960707.D	8A8960709.D	D	1	-	1

R50 "PATENTED" **EUROPEAN PROFILE** cylinder with internal **ROUND KNOB** and nickel-silver flat key with plasticised head, 11 pins and "PATENTED INSERT" N° EP1106756B1 external.
PROPERTY CARD. Antidrill pin inside the body and the barrel. DIN 30 projecting cam. **5 KEYS.**
85 mm screw.

L	C + D						
		BRASS	NICKEL				
Length mm 56 (knob 28+28)		8A8928287.D5	8A8928289.D5	D	1	5	5
Length mm 61 (knob 28+33)		8A8928337.D5	8A8928339.D5	D	1	5	5
Length mm 60 (knob 30+30)		8A8930307.D5	8A8930309.D5	D	1	5	5
Length mm 65 (knob 30+35)		8A8930357.D5	8A8930359.D5	D	1	5	5
Length mm 70 (knob 30+40)		8A8930407.D5	8A8930409.D5	D	1	5	5
Length mm 75 (knob 30+45)		8A8930457.D5	8A8930459.D5	D	1	5	5
Length mm 80 (knob 30+50)		8A8930507.D5	8A8930509.D5	D	1	5	5
Length mm 85 (knob 30+55)		8A8930557.D5	8A8930559.D5	D	1	5	5
Length mm 90 (knob 30+60)		8A8930607.D5	8A8930609.D5	D	1	5	5
Length mm 95 (knob 30+65)		8A8930657.D5	8A8930659.D5	D	1	-	1
Length mm 100 (knob 30+70)		8A8930707.D5	8A8930709.D5	D	1	-	1
Length mm 105 (knob 30+75)		8A8930757.D5	8A8930759.D5	D	1	-	1
Length mm 110 (knob 30+80)		8A8930807.D5	8A8930809.D5	D	1	-	1
Length mm 115 (knob 30+85)		8A8930857.D5	8A8930859.D5	D	1	-	1
Length mm 120 (knob 30+90)		8A8930907.D5	8A8930909.D5	D	1	-	1
Length mm 65 (knob 35+30)		8A8935307.D5	8A8935309.D5	D	1	5	5
Length mm 70 (knob 35+35)		8A8935357.D5	8A8935359.D5	D	1	5	5
Length mm 75 (knob 35+40)		8A8935407.D5	8A8935409.D5	D	1	5	5
Length mm 80 (knob 35+45)		8A8935457.D5	8A8935459.D5	D	1	5	5
Length mm 85 (knob 35+50)		8A8935507.D5	8A8935509.D5	D	1	5	5
Length mm 90 (knob 35+55)		8A8935557.D5	8A8935559.D5	D	1	5	5



Code
Status
Single
package
Multiple
package
Min. ord.

R50



L	C + D	BRASS	NICKEL				
Length mm 95 (knob 35+60)		8A8935607.D5	8A8935609.D5	D	1	-	1
Length mm 100 (knob 35+65)		8A8935657.D5	8A8935659.D5	D	1	-	1
Length mm 105 (knob 35+70)		8A8935707.D5	8A8935709.D5	D	1	-	1
Length mm 110 (knob 35+75)		8A8935757.D5	8A8935759.D5	D	1	-	1
Length mm 115 (knob 35+80)		8A8935807.D5	8A8935809.D5	D	1	-	1
Length mm 120 (knob 35+85)		8A8935857.D5	8A8935859.D5	D	1	-	1
Length mm 125 (knob 35+90)		8A8935907.D5	8A8935909.D5	D	1	-	1
Length mm 70 (knob 40+30)		8A8940307.D5	8A8940309.D5	D	1	5	5
Length mm 80 (knob 40+40)		8A8940407.D5	8A8940409.D5	D	1	5	5
Length mm 85 (knob 40+45)		8A8940457.D5	8A8940459.D5	D	1	5	5
Length mm 90 (knob 40+50)		8A8940507.D5	8A8940509.D5	D	1	5	5
Length mm 95 (knob 40+55)		8A8940557.D5	8A8940559.D5	D	1	-	1
Length mm 100 (knob 40+60)		8A8940607.D5	8A8940609.D5	D	1	-	1
Length mm 105 (knob 40+65)		8A8940657.D5	8A8940659.D5	D	1	-	1
Length mm 110 (knob 40+70)		8A8940707.D5	8A8940709.D5	D	1	-	1
Length mm 115 (knob 40+75)		8A8940757.D5	8A8940759.D5	D	1	-	1
Length mm 120 (knob 40+80)		8A8940807.D5	8A8940809.D5	D	1	-	1
Length mm 125 (knob 40+85)		8A8940857.D5	8A8940859.D5	D	1	-	1
Length mm 130 (knob 40+90)		8A8940907.D5	8A8940909.D5	D	1	-	1
Length mm 75 (knob 45+30)		8A8945307.D5	8A8945309.D5	D	1	5	5
Length mm 90 (knob 45+45)		8A8945457.D5	8A8945459.D5	D	1	5	5
Length mm 95 (knob 45+50)		8A8945507.D5	8A8945509.D5	D	1	-	1
Length mm 100 (knob 45+55)		8A8945557.D5	8A8945559.D5	D	1	-	1
Length mm 105 (knob 45+60)		8A8945607.D5	8A8945609.D5	D	1	-	1
Length mm 110 (knob 45+65)		8A8945657.D5	8A8945659.D5	D	1	-	1
Length mm 115 (knob 45+70)		8A8945707.D5	8A8945709.D5	D	1	-	1
Length mm 120 (knob 45+75)		8A8945757.D5	8A8945759.D5	D	1	-	1
Length mm 125 (knob 45+80)		8A8945807.D5	8A8945809.D5	D	1	-	1
Length mm 130 (knob 45+85)		8A8945857.D5	8A8945859.D5	D	1	-	1
Length mm 80 (knob 50+30)		8A8950307.D5	8A8950309.D5	D	1	-	1
Length mm 85 (knob 50+35)		8A8950357.D5	8A8950359.D5	D	1	-	1
Length mm 90 (knob 50+40)		8A8950407.D5	8A8950409.D5	D	1	-	1
Length mm 100 (knob 50+50)		8A8950507.D5	8A8950509.D5	D	1	-	1
Length mm 105 (knob 50+55)		8A8950557.D5	8A8950559.D5	D	1	-	1
Length mm 110 (knob 50+60)		8A8950607.D5	8A8950609.D5	D	1	-	1
Length mm 115 (knob 50+65)		8A8950657.D5	8A8950659.D5	D	1	-	1
Length mm 120 (knob 50+70)		8A8950707.D5	8A8950709.D5	D	1	-	1
Length mm 125 (knob 50+75)		8A8950757.D5	8A8950759.D5	D	1	-	1
Length mm 130 (knob 50+80)		8A8950807.D5	8A8950809.D5	D	1	-	1
Length mm 110 (knob 55+55)		8A8955557.D5	8A8955559.D5	D	1	-	1
Length mm 115 (knob 55+60)		8A8955607.D5	8A8955609.D5	D	1	-	1
Length mm 120 (knob 55+65)		8A8955657.D5	8A8955659.D5	D	1	-	1
Length mm 125 (knob 55+70)		8A8955707.D5	8A8955709.D5	D	1	-	1
Length mm 130 (knob 55+75)		8A8955757.D5	8A8955759.D5	D	1	-	1
Length mm 120 (knob 60+60)		8A8960607.D5	8A8960609.D5	D	1	-	1
Length mm 125 (knob 60+65)		8A8960657.D5	8A8960659.D5	D	1	-	1
Length mm 130 (knob 60+70)		8A8960707.D5	8A8960709.D5	D	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.

R50 for construction key

R50 "PATENTED" **SINGLE-PROFILE** cylinder with CONSTRUCTION KEY and nickel-silver flat key with plasticised head, 11 pins and "PATENTED INSERT" N° EP1106756B1.

PROPERTY CARD. Antidrill pin inside the body and the barrel. DIN 8-position cam. 85 mm screw.

1 CONSTRUCTION KEY + 3 KEYS.



L C + D	BRASS	NICKEL				
Length mm 40 (30+10)	8A0930107.D...C	8A0930109.D...C	D	1	-	1
Length mm 45 (35+10)	8A0935107.D...C	8A0935109.D...C	D	1	-	1
Length mm 50 (40+10)	8A0940107.D...C	8A0940109.D...C	D	1	-	1
Length mm 55 (45+10)	8A0945107.D...C	8A0945109.D...C	D	1	-	1
Length mm 60 (50+10)	8A0950107.D...C	8A0950109.D...C	D	1	-	1
Length mm 65 (55+10)	8A0955107.D...C	8A0955109.D...C	D	1	-	1
Length mm 70 (60+10)	8A0960107.D...C	8A0960109.D...C	D	1	-	1
Length mm 75 (65+10)	8A0965107.D...C	8A0965109.D...C	D	1	-	1
Length mm 80 (70+10)	8A0970107.D...C	8A0970109.D...C	D	1	-	1
Length mm 85 (75+10)	8A0975107.D...C	8A0975109.D...C	D	1	-	1
Length mm 90 (80+10)	8A0980107.D...C	8A0980109.D...C	D	1	-	1
Length mm 95 (85+10)	8A0985107.D...C	8A0985109.D...C	D	1	-	1
Length mm 100 (90+10)	8A0990107.D...C	8A0990109.D...C	D	1	-	1



R50 "PATENTED" **DOUBLE-PROFILE** cylinder with CONSTRUCTION KEY and nickel-silver flat key with plasticised head, 11 pins and "PATENTED INSERT" N° EP1106756B1.

PROPERTY CARD. Antidrill pin inside the body and the barrel. DIN 30 projecting cam. 85 mm screw.

1 CONSTRUCTION KEY + 3 KEYS.



L C + D	BRASS	NICKEL				
Length mm 56 (28+28)	8A0928287.D...C	8A0928289.D...C	D	1	-	1
Length mm 61 (28+33)	8A0928337.D...C	8A0928339.D...C	D	1	-	1
Length mm 60 (30+30)	8A0930307.D...C	8A0930309.D...C	D	1	-	1
Length mm 65 (30+35)	8A0930357.D...C	8A0930359.D...C	D	1	-	1
Length mm 70 (30+40)	8A0930407.D...C	8A0930409.D...C	D	1	-	1
Length mm 75 (30+45)	8A0930457.D...C	8A0930459.D...C	D	1	-	1
Length mm 80 (30+50)	8A0930507.D...C	8A0930509.D...C	D	1	-	1
Length mm 85 (30+55)	8A0930557.D...C	8A0930559.D...C	D	1	-	1
Length mm 90 (30+60)	8A0930607.D...C	8A0930609.D...C	D	1	-	1
Length mm 95 (30+65)	8A0930657.D...C	8A0930659.D...C	D	1	-	1
Length mm 100 (30+70)	8A0930707.D...C	8A0930709.D...C	D	1	-	1
Length mm 105 (30+75)	8A0930757.D...C	8A0930759.D...C	D	1	-	1
Length mm 110 (30+80)	8A0930807.D...C	8A0930809.D...C	D	1	-	1
Length mm 115 (30+85)	8A0930857.D...C	8A0930859.D...C	D	1	-	1
Length mm 120 (30+90)	8A0930907.D...C	8A0930909.D...C	D	1	-	1
Length mm 70 (35+35)	8A0935357.D...C	8A0935359.D...C	D	1	-	1
Length mm 75 (35+40)	8A0935407.D...C	8A0935409.D...C	D	1	-	1
Length mm 80 (35+45)	8A0935457.D...C	8A0935459.D...C	D	1	-	1
Length mm 85 (35+50)	8A0935507.D...C	8A0935509.D...C	D	1	-	1
Length mm 90 (35+55)	8A0935557.D...C	8A0935559.D...C	D	1	-	1
Length mm 95 (35+60)	8A0935607.D...C	8A0935609.D...C	D	1	-	1
Length mm 100 (35+65)	8A0935657.D...C	8A0935659.D...C	D	1	-	1



Code
Status
Single
package
Multiple
package
Min. ord.

R50 for construction key



L C + D	BRASS		NICKEL		D	1	-	1
	8A0935707.D...C	8A0935709.D...C	8A0935757.D...C	8A0935759.D...C				
Length mm 105 (35+70)	8A0935707.D...C	8A0935709.D...C	8A0935757.D...C	8A0935759.D...C	D	1	-	1
Length mm 110 (35+75)	8A0935707.D...C	8A0935709.D...C	8A0935757.D...C	8A0935759.D...C	D	1	-	1
Length mm 115 (35+80)	8A0935807.D...C	8A0935809.D...C	8A0935857.D...C	8A0935859.D...C	D	1	-	1
Length mm 120 (35+85)	8A0935807.D...C	8A0935809.D...C	8A0935857.D...C	8A0935859.D...C	D	1	-	1
Length mm 125 (35+90)	8A0935907.D...C	8A0935909.D...C	8A0935957.D...C	8A0935959.D...C	D	1	-	1
Length mm 80 (40+40)	8A0940407.D...C	8A0940409.D...C	8A0940457.D...C	8A0940459.D...C	D	1	-	1
Length mm 85 (40+45)	8A0940407.D...C	8A0940409.D...C	8A0940457.D...C	8A0940459.D...C	D	1	-	1
Length mm 90 (40+50)	8A0940507.D...C	8A0940509.D...C	8A0940557.D...C	8A0940559.D...C	D	1	-	1
Length mm 95 (40+55)	8A0940507.D...C	8A0940509.D...C	8A0940557.D...C	8A0940559.D...C	D	1	-	1
Length mm 100 (40+60)	8A0940607.D...C	8A0940609.D...C	8A0940657.D...C	8A0940659.D...C	D	1	-	1
Length mm 105 (40+65)	8A0940607.D...C	8A0940609.D...C	8A0940657.D...C	8A0940659.D...C	D	1	-	1
Length mm 110 (40+70)	8A0940707.D...C	8A0940709.D...C	8A0940757.D...C	8A0940759.D...C	D	1	-	1
Length mm 115 (40+75)	8A0940707.D...C	8A0940709.D...C	8A0940757.D...C	8A0940759.D...C	D	1	-	1
Length mm 120 (40+80)	8A0940807.D...C	8A0940809.D...C	8A0940857.D...C	8A0940859.D...C	D	1	-	1
Length mm 125 (40+85)	8A0940807.D...C	8A0940809.D...C	8A0940857.D...C	8A0940859.D...C	D	1	-	1
Length mm 130 (40+90)	8A0940907.D...C	8A0940909.D...C	8A0945457.D...C	8A0945459.D...C	D	1	-	1
Length mm 90 (45+45)	8A0945457.D...C	8A0945459.D...C	8A0945507.D...C	8A0945509.D...C	D	1	-	1
Length mm 95 (45+50)	8A0945457.D...C	8A0945459.D...C	8A0945507.D...C	8A0945509.D...C	D	1	-	1
Length mm 100 (45+55)	8A0945507.D...C	8A0945509.D...C	8A0945557.D...C	8A0945559.D...C	D	1	-	1
Length mm 105 (45+60)	8A0945507.D...C	8A0945509.D...C	8A0945557.D...C	8A0945559.D...C	D	1	-	1
Length mm 110 (45+65)	8A0945607.D...C	8A0945609.D...C	8A0945657.D...C	8A0945659.D...C	D	1	-	1
Length mm 115 (45+70)	8A0945607.D...C	8A0945609.D...C	8A0945657.D...C	8A0945659.D...C	D	1	-	1
Length mm 120 (45+75)	8A0945707.D...C	8A0945709.D...C	8A0945757.D...C	8A0945759.D...C	D	1	-	1
Length mm 125 (45+80)	8A0945707.D...C	8A0945709.D...C	8A0945757.D...C	8A0945759.D...C	D	1	-	1
Length mm 130 (45+85)	8A0945807.D...C	8A0945809.D...C	8A0945857.D...C	8A0945859.D...C	D	1	-	1
Length mm 100 (50+50)	8A0950507.D...C	8A0950509.D...C	8A0950557.D...C	8A0950559.D...C	D	1	-	1
Length mm 105 (50+55)	8A0950507.D...C	8A0950509.D...C	8A0950557.D...C	8A0950559.D...C	D	1	-	1
Length mm 110 (50+60)	8A0950607.D...C	8A0950609.D...C	8A0950657.D...C	8A0950659.D...C	D	1	-	1
Length mm 115 (50+65)	8A0950607.D...C	8A0950609.D...C	8A0950657.D...C	8A0950659.D...C	D	1	-	1
Length mm 120 (50+70)	8A0950707.D...C	8A0950709.D...C	8A0950757.D...C	8A0950759.D...C	D	1	-	1
Length mm 125 (50+75)	8A0950707.D...C	8A0950709.D...C	8A0950757.D...C	8A0950759.D...C	D	1	-	1
Length mm 130 (50+80)	8A0950807.D...C	8A0950809.D...C	8A0955557.D...C	8A0955559.D...C	D	1	-	1
Length mm 110 (55+55)	8A0955557.D...C	8A0955559.D...C	8A0955607.D...C	8A0955609.D...C	D	1	-	1
Length mm 115 (55+60)	8A0955557.D...C	8A0955559.D...C	8A0955607.D...C	8A0955609.D...C	D	1	-	1
Length mm 120 (55+65)	8A0955607.D...C	8A0955609.D...C	8A0955657.D...C	8A0955659.D...C	D	1	-	1
Length mm 125 (55+70)	8A0955607.D...C	8A0955609.D...C	8A0955657.D...C	8A0955659.D...C	D	1	-	1
Length mm 130 (55+75)	8A0955707.D...C	8A0955709.D...C	8A0955757.D...C	8A0955759.D...C	D	1	-	1
Length mm 120 (60+60)	8A0960607.D...C	8A0960609.D...C	8A0960657.D...C	8A0960659.D...C	D	1	-	1
Length mm 125 (60+65)	8A0960607.D...C	8A0960609.D...C	8A0960657.D...C	8A0960659.D...C	D	1	-	1
Length mm 130 (60+70)	8A0960707.D...C	8A0960709.D...C			D	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.

R50 for construction key

R50 "PATENTED" **EUROPEAN PROFILE** cylinder with **CONSTRUCTION KEY**, D8x75 shaft, preset for internal knob and nickel-silver flat key with plasticised head, 11 pins and "PATENTED INSERT" N° EP1106756B1. **PROPERTY CARD**. Brass.

Antidrill pin inside the body and the barrel. DIN 30 projecting cam. 85 mm screw.

1 CONSTRUCTION KEY + 3 KEYS.

L C + D

Body length mm 60 (knob 30+30)

Body length mm 65 (knob 30+35)

Body length mm 70 (knob 30+40)

Body length mm 75 (knob 30+45)

Body length mm 80 (knob 30+50)

Body length mm 85 (knob 30+55)

Body length mm 90 (knob 30+60)

Body length mm 95 (knob 30+65)

Body length mm 100 (knob 30+70)

BRASS

NICKEL

8A69D0307.D...C

8A69D0309.D...C

D 1 - 1

8A69D0357.D...C

8A69D0359.D...C

D 1 - 1

8A69D0407.D...C

8A69D0409.D...C

D 1 - 1

8A69D0457.D...C

8A69D0459.D...C

D 1 - 1

8A69D0507.D...C

8A69D0509.D...C

D 1 - 1

8A69D0557.D...C

8A69D0559.D...C

D 1 - 1

8A69D0607.D...C

8A69D0609.D...C

D 1 - 1

8A69D0657.D...C


8A69D0659.D...C

D 1 - 1

8A69D0707.D...C

8A69D0709.D...C

D 1 - 1




Code
Status
Single
package
Multiple
package
Min. ord.

R50 for construction key

R50 "PATENTED" **EUROPEAN PROFILE** cylinder with **CONSTRUCTION KEY** and internal **ROUND KNOB**
nickel-silver flat key with plasticised head, 11 pins and "PATENTED INSERT" N° EP1106756B1 external.

PROPERTY CARD. Brass. Antidrill pin inside the body and the barrel. DIN 30 projecting cam.

85 mm screw. **1 CONSTRUCTION KEY + 3 KEYS.**



L	C + D	BRASS	NICKEL				
Length mm 56 (knob 28+28)		8A8928287.D...C	8A8928289.D...C	D	1	-	1
Length mm 61 (knob 28+33)		8A8928337.D...C	8A8928339.D...C	D	1	-	1
Length mm 60 (knob 30+30)		8A8930307.D...C	8A8930309.D...C	D	1	-	1
Length mm 65 (knob 30+35)		8A8930357.D...C	8A8930359.D...C	D	1	-	1
Length mm 70 (knob 30+40)		8A8930407.D...C	8A8930409.D...C	D	1	-	1
Length mm 75 (knob 30+45)		8A8930457.D...C	8A8930459.D...C	D	1	-	1
Length mm 80 (knob 30+50)		8A8930507.D...C	8A8930509.D...C	D	1	-	1
Length mm 85 (knob 30+55)		8A8930557.D...C	8A8930559.D...C	D	1	-	1
Length mm 90 (knob 30+60)		8A8930607.D...C	8A8930609.D...C	D	1	-	1
Length mm 95 (knob 30+65)		8A8930657.D...C	8A8930659.D...C	D	1	-	1
Length mm 100 (knob 30+70)		8A8930707.D...C	8A8930709.D...C	D	1	-	1
Length mm 105 (knob 30+75)		8A8930757.D...C	8A8930759.D...C	D	1	-	1
Length mm 110 (knob 30+80)		8A8930807.D...C	8A8930809.D...C	D	1	-	1
Length mm 115 (knob 30+85)		8A8930857.D...C	8A8930859.D...C	D	1	-	1
Length mm 120 (knob 30+90)		8A8930907.D...C	8A8930909.D...C	D	1	-	1
Length mm 70 (knob 35+35)		8A8935357.D...C	8A8935359.D...C	D	1	-	1
Length mm 75 (knob 35+40)		8A8935407.D...C	8A8935409.D...C	D	1	-	1
Length mm 80 (knob 35+45)		8A8935457.D...C	8A8935459.D...C	D	1	-	1
Length mm 85 (knob 35+50)		8A8935507.D...C	8A8935509.D...C	D	1	-	1
Length mm 90 (knob 35+55)		8A8935557.D...C	8A8935559.D...C	D	1	-	1
Length mm 95 (knob 35+60)		8A8935607.D...C	8A8935609.D...C	D	1	-	1
Length mm 100 (knob 35+65)		8A8935657.D...C	8A8935659.D...C	D	1	-	1
Length mm 105 (knob 35+70)		8A8935707.D...C	8A8935709.D...C	D	1	-	1
Length mm 110 (knob 35+75)		8A8935757.D...C	8A8935759.D...C	D	1	-	1
Length mm 115 (knob 35+80)		8A8935807.D...C	8A8935809.D...C	D	1	-	1
Length mm 120 (knob 35+85)		8A8935857.D...C	8A8935859.D...C	D	1	-	1
Length mm 125 (knob 35+90)		8A8935907.D...C	8A8935909.D...C	D	1	-	1
Length mm 80 (knob 40+40)		8A8940407.D...C	8A8940409.D...C	D	1	-	1
Length mm 85 (knob 40+45)		8A8940457.D...C	8A8940459.D...C	D	1	-	1
Length mm 90 (knob 40+50)		8A8940507.D...C	8A8940509.D...C	D	1	-	1
Length mm 95 (knob 40+55)		8A8940557.D...C	8A8940559.D...C	D	1	-	1
Length mm 100 (knob 40+60)		8A8940607.D...C	8A8940609.D...C	D	1	-	1
Length mm 105 (knob 40+65)		8A8940657.D...C	8A8940659.D...C	D	1	-	1
Length mm 110 (knob 40+70)		8A8940707.D...C	8A8940709.D...C	D	1	-	1
Length mm 115 (knob 40+75)		8A8940757.D...C	8A8940759.D...C	D	1	-	1
Length mm 120 (knob 40+80)		8A8940807.D...C	8A8940809.D...C	D	1	-	1
Length mm 125 (knob 40+85)		8A8940857.D...C	8A8940859.D...C	D	1	-	1
Length mm 130 (knob 40+90)		8A8940907.D...C	8A8940909.D...C	D	1	-	1
Length mm 90 (knob 45+45)		8A8945457.D...C	8A8945459.D...C	D	1	-	1
Length mm 95 (knob 45+50)		8A8945507.D...C	8A8945509.D...C	D	1	-	1
Length mm 100 (knob 45+55)		8A8945557.D...C	8A8945559.D...C	D	1	-	1
Length mm 105 (knob 45+60)		8A8945607.D...C	8A8945609.D...C	D	1	-	1
Length mm 110 (knob 45+65)		8A8945657.D...C	8A8945659.D...C	D	1	-	1

R50 for construction key



L	C + D	BRASS	NICKEL				
Length mm 115 (knob 45+70)		8A8945707.D...C	8A8945709.D...C	D	1	-	1
Length mm 120 (knob 45+75)		8A8945757.D...C	8A8945759.D...C	D	1	-	1
Length mm 125 (knob 45+80)		8A8945807.D...C	8A8945809.D...C	D	1	-	1
Length mm 130 (knob 45+85)		8A8945857.D...C	8A8945859.D...C	D	1	-	1
Length mm 100 (knob 50+50)		8A8950507.D...C	8A8950509.D...C	D	1	-	1
Length mm 105 (knob 50+55)		8A8950557.D...C	8A8950559.D...C	D	1	-	1
Length mm 110 (knob 50+60)		8A8950607.D...C	8A8950609.D...C	D	1	-	1
Length mm 115 (knob 50+65)		8A8950657.D...C	8A8950659.D...C	D	1	-	1
Length mm 120 (knob 50+70)		8A8950707.D...C	8A8950709.D...C	D	1	-	1
Length mm 125 (knob 50+75)		8A8950757.D...C	8A8950759.D...C	D	1	-	1
Length mm 130 (knob 50+80)		8A8950807.D...C	8A8950809.D...C	D	1	-	1
Length mm 110 (knob 55+55)		8A8955557.D...C	8A8955559.D...C	D	1	-	1
Length mm 115 (knob 55+60)		8A8955607.D...C	8A8955609.D...C	D	1	-	1
Length mm 120 (knob 55+65)		8A8955657.D...C	8A8955659.D...C	D	1	-	1
Length mm 125 (knob 55+70)		8A8955707.D...C	8A8955709.D...C	D	1	-	1
Length mm 130 (knob 55+75)		8A8955757.D...C	8A8955759.D...C	D	1	-	1
Length mm 120 (knob 60+60)		8A8960607.D...C	8A8960609.D...C	D	1	-	1
Length mm 125 (knob 60+65)		8A8960657.D...C	8A8960659.D...C	D	1	-	1
Length mm 130 (knob 60+70)		8A8960707.D...C	8A8960709.D...C	D	1	-	1

R50 with microswitch



R50 "PATENTED" and M26 **THREADED** cylinder with signaling **MICROSWITCH**.

Nickel-silver flat key with plasticised head, 11 pins and "PATENTED INSERT" N° EP1106756B.

PROPERTY CARD. Nickel-plated brass **3 KEYS** (key blank code: 020990H).

Common contact + normally open + normally closed

855589 D 1 5 5

Cylinders

R7

Min. ord.
Multiple
package
Single
package
Status
Code

R7




R7 **SINGLE-PROFILE** cylinder. Nickel-plated brass flat key with 11 pins. **CODE CARD.**

Antidrill pin inside the body and the barrel. DIN 8-position cam. **3 KEYS.** Key head cap. 85 mm screw.
(key blank code: 020909).



L C + D	BRASS	NICKEL					
Lenght mm 40 (30+10)	82R7030107	82R7030109	D	1	10	10	
Lenght mm 45 (35+10)	82R7035107	82R7035109	D	1	10	10	
Lenght mm 50 (40+10)	82R7040107	82R7040109	D	1	10	10	
Lenght mm 55 (45+10)	82R7045107	82R7045109	D	1	10	10	
Lenght mm 60 (50+10)	82R7050107	82R7050109	D	1	10	10	
Lenght mm 65 (55+10)	82R7055107	82R7055109	D	1	10	10	
Lenght mm 70 (60+10)	82R7060107	82R7060109	D	1	10	10	
Lenght mm 75 (65+10)	82R7065107	82R7065109	D	1	10	10	
Lenght mm 80 (70+10)	82R7070107	82R7070109	D	1	10	10	
Lenght mm 85 (75+10)	82R7075107	82R7075109	D	1	10	10	
Lenght mm 90 (80+10)	82R7080107	82R7080109	D	1	10	10	
Lenght mm 95 (85+10)	82R7085107	82R7085109	D	1	-	1	
Lenght mm 100 (90+10)	82R7090107	82R7090109	D	1	-	1	



R7 **SINGLE-PROFILE** cylinder. Nickel-plated brass flat key with 11 pins. **CODE CARD.**


Antidrill pin inside the body and the barrel. DIN 8-position cam. **5 KEYS.** Key head cap. 85 mm screw.
(key blank code: 020909).



L C + D	BRASS	NICKEL					
Lenght mm 40 (30+10)	82R7030107...5	82R7030109...5	D	1	10	10	
Lenght mm 45 (35+10)	82R7035107...5	82R7035109...5	D	1	10	10	
Lenght mm 50 (40+10)	82R7040107...5	82R7040109...5	D	1	10	10	
Lenght mm 55 (45+10)	82R7045107...5	82R7045109...5	D	1	10	10	
Lenght mm 60 (50+10)	82R7050107...5	82R7050109...5	D	1	10	10	
Lenght mm 65 (55+10)	82R7055107...5	82R7055109...5	D	1	10	10	
Lenght mm 70 (60+10)	82R7060107...5	82R7060109...5	D	1	10	10	
Lenght mm 75 (65+10)	82R7065107...5	82R7065109...5	D	1	10	10	
Lenght mm 80 (70+10)	82R7070107...5	82R7070109...5	D	1	10	10	
Lenght mm 85 (75+10)	82R7075107...5	82R7075109...5	D	1	10	10	
Lenght mm 90 (80+10)	82R7080107...5	82R7080109...5	D	1	10	10	
Lenght mm 95 (85+10)	82R7085107...5	82R7085109...5	D	1	-	1	
Lenght mm 100 (90+10)	82R7090107...5	82R7090109...5	D	1	-	1	

Min. ord.
Multiple
package
Single
package
Status
Code

R7



R7 **DOUBLE-PROFILE** cylinder. Nickel-plated brass flat key with 11 pins. **CODE CARD.**

Antidrill pin inside the body and the barrel. DIN 8-position cam. **3 KEYS.** Key head cap. 85 mm screw.

(key blank code: 020909).



L C + D	BRASS	NICKEL					
Lenght mm 56 (28+28)	82R7028287	82R7028289	D	1	10	10	
Lenght mm 61 (28+33)	82R7028337	82R7028339	D	1	10	10	
Lenght mm 60 (30+30)	82R7030307	82R7030309	B	1	10	10	
Lenght mm 65 (30+35)	82R7030357	82R7030359	C	1	10	10	
Lenght mm 70 (30+40)	82R7030407	82R7030409	C	1	10	10	
Lenght mm 75 (30+45)	82R7030457	82R7030459	C	1	10	10	
Lenght mm 80 (30+50)	82R7030507	82R7030509	C	1	10	10	
Lenght mm 85 (30+55)	82R7030557	82R7030559	D	1	10	10	
Lenght mm 90 (30+60)	82R7030607	82R7030609	C	1	10	10	
Lenght mm 95 (30+65)	82R7030657	82R7030659	D	1	-	1	
Lenght mm 100 (30+70)	82R7030707	82R7030709	C	1	-	1	
Lenght mm 105 (30+75)	82R7030757	82R7030759	D	1	-	1	
Lenght mm 110 (30+80)	82R7030807	82R7030809	D	1	-	1	
Lenght mm 115 (30+85)	82R7030857	82R7030859	D	1	-	1	
Lenght mm 120 (30+90)	82R7030907	82R7030909	D	1	-	1	
Lenght mm 70 (35+35)	82R7035357	82R7035359	C	1	10	10	
Lenght mm 75 (35+40)	82R7035407	82R7035409	C	1	10	10	
Lenght mm 80 (35+45)	82R7035457	82R7035459	D	1	10	10	
Lenght mm 85 (35+50)	82R7035507	82R7035509	C	1	10	10	
Lenght mm 90 (35+55)	82R7035557	82R7035559	D	1	10	10	
Lenght mm 95 (35+60)	82R7035607	82R7035609	D	1	-	1	
Lenght mm 100 (35+65)	82R7035657	82R7035659	D	1	-	1	
Lenght mm 105 (35+70)	82R7035707	82R7035709	D	1	-	1	
Lenght mm 110 (35+75)	82R7035757	82R7035759	D	1	-	1	
Lenght mm 115 (35+80)	82R7035807	82R7035809	D	1	-	1	
Lenght mm 120 (35+85)	82R7035857	82R7035859	D	1	-	1	
Lenght mm 125 (35+90)	82R7035907	82R7035909	D	1	-	1	
Lenght mm 80 (40+40)	82R7040407	82R7040409	C	1	10	10	
Lenght mm 85 (40+45)	82R7040457	82R7040459	D	1	10	10	
Lenght mm 90 (40+50)	82R7040507	82R7040509	C	1	10	10	
Lenght mm 95 (40+55)	82R7040557	82R7040559	D	1	-	1	
Lenght mm 100 (40+60)	82R7040607	82R7040609	D	1	-	1	
Lenght mm 105 (40+65)	82R7040657	82R7040659	D	1	-	1	
Lenght mm 110 (40+70)	82R7040707	82R7040709	D	1	-	1	
Lenght mm 115 (40+75)	82R7040757	82R7040759	D	1	-	1	
Lenght mm 120 (40+80)	82R7040807	82R7040809	D	1	-	1	
Lenght mm 125 (40+85)	82R7040857	82R7040859	D	1	-	1	
Lenght mm 130 (40+90)	82R7040907	82R7040909	D	1	-	1	
Lenght mm 90 (45+45)	82R7045457	82R7045459	D	1	10	10	
Lenght mm 95 (45+50)	82R7045507	82R7045509	C	1	-	1	
Lenght mm 100 (45+55)	82R7045557	82R7045559	D	1	-	1	
Lenght mm 105 (45+60)	82R7045607	82R7045609	D	1	-	1	
Lenght mm 110 (45+65)	82R7045657	82R7045659	D	1	-	1	
Lenght mm 115 (45+70)	82R7045707	82R7045709	D	1	-	1	
Lenght mm 120 (45+75)	82R7045757	82R7045759	D	1	-	1	
Lenght mm 125 (45+80)	82R7045807	82R7045809	D	1	-	1	

Code
Status
Single
package
Multiple
package
Min. ord.

R7

L C + D	BRASS	NICKEL				
Lenght mm 130 (45+85)	82R7045857	82R7045859	D	1	-	1
Lenght mm 100 (50+50)	82R7050507	82R7050509	D	1	-	1
Lenght mm 105 (50+55)	82R7050557	82R7050559	D	1	-	1
Lenght mm 110 (50+60)	82R7050607	82R7050609	D	1	-	1
Lenght mm 115 (50+65)	82R7050657	82R7050659	D	1	-	1
Lenght mm 120 (50+70)	82R7050707	82R7050709	D	1	-	1
Lenght mm 125 (50+75)	82R7050757	82R7050759	D	1	-	1
Lenght mm 130 (50+80)	82R7050807	82R7050809	D	1	-	1
Lenght mm 110 (55+55)	82R7055557	82R7055559	D	1	-	1
Lenght mm 115 (55+60)	82R7055607	82R7055609	D	1	-	1
Lenght mm 120 (55+65)	82R7055657	82R7055659	D	1	-	1
Lenght mm 125 (55+70)	82R7055707	82R7055709	D	1	-	1
Lenght mm 130 (55+75)	82R7055757	82R7055759	D	1	-	1
Lenght mm 120 (60+60)	82R7060607	82R7060609	D	1	-	1
Lenght mm 125 (60+65)	82R7060657	82R7060659	D	1	-	1
Lenght mm 130 (60+70)	82R7060707	82R7060709	D	1	-	1


R7 **DOUBLE-PROFILE** cylinder. Nickel-plated brass flat key with 11 pins. **CODE CARD.**

Antidriill pin inside the body and the barrel. DIN 8-position cam. **5 KEYS.** Key head cap. 85 mm screw.
(key blank code: 020909).



L C + D

L C + D	BRASS	NICKEL				
Lenght mm 56 (28+28)	82R7028287...5	82R7028289...5	D	1	10	10
Lenght mm 61 (28+33)	82R7028337...5	82R7028339...5	D	1	10	10
Lenght mm 60 (30+30)	82R7030307...5	82R7030309...5	C	1	10	10
Lenght mm 65 (30+35)	82R7030357...5	82R7030359...5	C	1	10	10
Lenght mm 70 (30+40)	82R7030407...5	82R7030409...5	B	1	10	10
Lenght mm 75 (30+45)	82R7030457...5	82R7030459...5	C	1	10	10
Lenght mm 80 (30+50)	82R7030507...5	82R7030509...5	C	1	10	10
Lenght mm 85 (30+55)	82R7030557...5	82R7030559...5	D	1	10	10
Lenght mm 90 (30+60)	82R7030607...5	82R7030609...5	D	1	10	10
Lenght mm 95 (30+65)	82R7030657...5	82R7030659...5	D	1	-	1
Lenght mm 100 (30+70)	82R7030707...5	82R7030709...5	C	1	-	1
Lenght mm 105 (30+75)	82R7030757...5	82R7030759...5	C	1	-	1
Lenght mm 110 (30+80)	82R7030807...5	82R7030809...5	D	1	-	1
Lenght mm 115 (30+85)	82R7030857...5	82R7030859...5	D	1	-	1
Lenght mm 120 (30+90)	82R7030907...5	82R7030909...5	D	1	-	1
Lenght mm 70 (35+35)	82R7035357...5	82R7035359...5	C	1	10	10
Lenght mm 75 (35+40)	82R7035407...5	82R7035409...5	D	1	10	10
Lenght mm 80 (35+45)	82R7035457...5	82R7035459...5	C	1	10	10
Lenght mm 85 (35+50)	82R7035507...5	82R7035509...5	C	1	10	10
Lenght mm 90 (35+55)	82R7035557...5	82R7035559...5	C	1	10	10
Lenght mm 95 (35+60)	82R7035607...5	82R7035609...5	D	1	-	1
Lenght mm 100 (35+65)	82R7035657...5	82R7035659...5	D	1	-	1
Lenght mm 105 (35+70)	82R7035707...5	82R7035709...5	D	1	-	1
Lenght mm 110 (35+75)	82R7035757...5	82R7035759...5	D	1	-	1
Lenght mm 115 (35+80)	82R7035807...5	82R7035809...5	D	1	-	1
Lenght mm 120 (35+85)	82R7035857...5	82R7035859...5	D	1	-	1
Lenght mm 125 (35+90)	82R7035907...5	82R7035909...5	D	1	-	1
Lenght mm 80 (40+40)	82R7040407...5	82R7040409...5	C	1	10	10



Min. ord.
Multiple
package
Single
package
Status
Code

R7



BRASS

NICKEL

L C + D

Lenght mm 85 (40+45)

Lenght mm 90 (40+50)

Lenght mm 95 (40+55)

Lenght mm 100 (40+60)

Lenght mm 105 (40+65)

Lenght mm 110 (40+70)

Lenght mm 115 (40+75)

Lenght mm 120 (40+80)

Lenght mm 125 (40+85)

Lenght mm 130 (40+90)

Lenght mm 90 (45+45)

Lenght mm 95 (45+50)

Lenght mm 100 (45+55)

Lenght mm 105 (45+60)

Lenght mm 110 (45+65)

Lenght mm 115 (45+70)

Lenght mm 120 (45+75)

Lenght mm 125 (45+80)

Lenght mm 130 (45+85)

Lenght mm 100 (50+50)

Lenght mm 105 (50+55)

Lenght mm 110 (50+60)

Lenght mm 115 (50+65)

Lenght mm 120 (50+70)

Lenght mm 125 (50+75)

Lenght mm 130 (50+80)

Lenght mm 110 (55+55)

Lenght mm 115 (55+60)

Lenght mm 120 (55+65)

Lenght mm 125 (55+70)

Lenght mm 130 (55+75)

Lenght mm 120 (60+60)

Lenght mm 125 (60+65)

Lenght mm 130 (60+70)

82R7040457...5

82R7040459...5

D 1 10 10

82R7040507...5

82R7040509...5

C 1 10 10

82R7040557...5

82R7040559...5

D 1 - 1

82R7040607...5

82R7040609...5

D 1 - 1

82R7040657...5

82R7040659...5

D 1 - 1

82R7040707...5

82R7040709...5

D 1 - 1

82R7040757...5

82R7040759...5

D 1 - 1

82R7040807...5

82R7040809...5

D 1 - 1

82R7040857...5

82R7040859...5

D 1 - 1

82R7040907...5

82R7040909...5

D 1 - 1

82R7045457...5

82R7045459...5

C 1 10 10

82R7045507...5

82R7045509...5

D 1 - 1

82R7045557...5

82R7045559...5

D 1 - 1

82R7045607...5

82R7045609...5

D 1 - 1

82R7045657...5

82R7045659...5

D 1 - 1

82R7045707...5

82R7045709...5

D 1 - 1

82R7045757...5

82R7045759...5

D 1 - 1

82R7045807...5

82R7045809...5

D 1 - 1

82R7045857...5

82R7045859...5

D 1 - 1

82R7050507...5

82R7050509...5

D 1 - 1

82R7050557...5

82R7050559...5

D 1 - 1

82R7050607...5

82R7050609...5

D 1 - 1

82R7050657...5

82R7050659...5

D 1 - 1

82R7050707...5

82R7050709...5

D 1 - 1

82R7050757...5

82R7050759...5

D 1 - 1

82R7050807...5

82R7050809...5

D 1 - 1

82R7055557...5

82R7055559...5

D 1 - 1

82R7055607...5

82R7055609...5

D 1 - 1

82R7055657...5

82R7055659...5

D 1 - 1

82R7055707...5

82R7055709...5

D 1 - 1

82R7055757...5

82R7055759...5

D 1 - 1

82R7060607...5

82R7060609...5

D 1 - 1

82R7060657...5

82R7060659...5

D 1 - 1

82R7060707...5


82R7060709...5

D 1 - 1



Code
Status
Single
package
Multiple
package
Min. ord.

R7

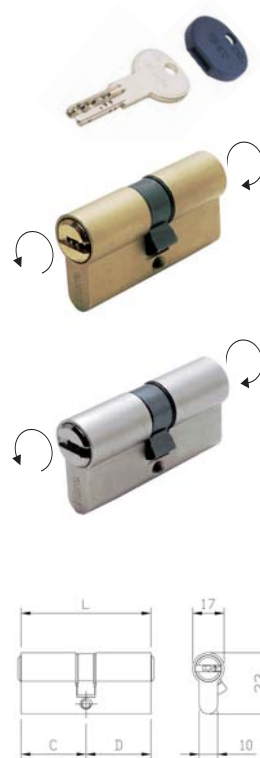

R7 **DOUBLE-PROFILE** cylinder. Nickel-plated brass flat key with 11 pins. **CODE CARD.**
DOUBLE FUNCTION, also operates when keyed-in. Antidrill pin inside the body and the barrel.
DIN 30 projecting cam. **3 KEYS**. Key head cap. 85 mm screw. (key blank code: 020909).



L C + D	BRASS	NICKEL					
Lenght mm 60 (30+30)	82R7930307	82R7930309	D	1	10	10	
Lenght mm 65 (30+35)	82R7930357	82R7930359	D	1	10	10	
Lenght mm 70 (30+40)	82R7930407	82R7930409	D	1	10	10	
Lenght mm 75 (30+45)	82R7930457	82R7930459	D	1	10	10	
Lenght mm 80 (30+50)	82R7930507	82R7930509	D	1	10	10	
Lenght mm 85 (30+55)	82R7930557	82R7930559	D	1	10	10	
Lenght mm 90 (30+60)	82R7930607	82R7930609	D	1	10	10	
Lenght mm 95 (30+65)	82R7930657	82R7930659	D	1	-	1	
Lenght mm 100 (30+70)	82R7930707	82R7930709	D	1	-	1	
Lenght mm 105 (30+75)	82R7930757	82R7930759	D	1	-	1	
Lenght mm 110 (30+80)	82R7930807	82R7930809	D	1	-	1	
Lenght mm 115 (30+85)	82R7930857	82R7930859	D	1	-	1	
Lenght mm 120 (30+90)	82R7930907	82R7930909	D	1	-	1	
Lenght mm 70 (35+35)	82R7935357	82R7935359	D	1	10	10	
Lenght mm 75 (35+40)	82R7935407	82R7935409	D	1	10	10	
Lenght mm 80 (35+45)	82R7935457	82R7935459	D	1	10	10	
Lenght mm 85 (35+50)	82R7935507	82R7935509	D	1	10	10	
Lenght mm 90 (35+55)	82R7935557	82R7935559	D	1	10	10	
Lenght mm 95 (35+60)	82R7935607	82R7935609	D	1	-	1	
Lenght mm 100 (35+65)	82R7935657	82R7935659	D	1	-	1	
Lenght mm 105 (35+70)	82R7935707	82R7935709	D	1	-	1	
Lenght mm 110 (35+75)	82R7935757	82R7935759	D	1	-	1	
Lenght mm 115 (35+80)	82R7935807	82R7935809	D	1	-	1	
Lenght mm 120 (35+85)	82R7935857	82R7935859	D	1	-	1	
Lenght mm 125 (35+90)	82R7935907	82R7935909	D	1	-	1	
Lenght mm 80 (40+40)	82R7940407	82R7940409	D	1	10	10	
Lenght mm 85 (40+45)	82R7940457	82R7940459	D	1	10	10	
Lenght mm 90 (40+50)	82R7940507	82R7940509	D	1	10	10	
Lenght mm 95 (40+55)	82R7940557	82R7940559	D	1	-	1	
Lenght mm 100 (40+60)	82R7940607	82R7940609	D	1	-	1	
Lenght mm 105 (40+65)	82R7940657	82R7940659	D	1	-	1	
Lenght mm 110 (40+70)	82R7940707	82R7940709	D	1	-	1	
Lenght mm 115 (40+75)	82R7940757	82R7940759	D	1	-	1	
Lenght mm 120 (40+80)	82R7940807	82R7940809	D	1	-	1	
Lenght mm 125 (40+85)	82R7940857	82R7940859	D	1	-	1	
Lenght mm 130 (40+90)	82R7940907	82R7940909	D	1	-	1	
Lenght mm 90 (45+45)	82R7945457	82R7945459	D	1	10	10	
Lenght mm 95 (45+50)	82R7945507	82R7945509	D	1	-	1	
Lenght mm 100 (45+55)	82R7945557	82R7945559	D	1	-	1	
Lenght mm 105 (45+60)	82R7945607	82R7945609	D	1	-	1	
Lenght mm 110 (45+65)	82R7945657	82R7945659	D	1	-	1	
Lenght mm 115 (45+70)	82R7945707	82R7945709	D	1	-	1	
Lenght mm 120 (45+75)	82R7945757	82R7945759	D	1	-	1	
Lenght mm 125 (45+80)	82R7945807	82R7945809	D	1	-	1	
Lenght mm 130 (45+85)	82R7945857	82R7945859	D	1	-	1	
Lenght mm 100 (50+50)	82R7950507	82R7950509	D	1	-	1	

R7

Code
Status
Single
package
Multiple
package
Min. ord.

L C + D						
	BRASS	NICKEL				
Lenght mm 105 (50+55)	82R7950557	82R7950559	D	1	-	1
Lenght mm 110 (50+60)	82R7950607	82R7950609	D	1	-	1
Lenght mm 115 (50+65)	82R7950657	82R7950659	D	1	-	1
Lenght mm 120 (50+70)	82R7950707	82R7950709	D	1	-	1
Lenght mm 125 (50+75)	82R7950757	82R7950759	D	1	-	1
Lenght mm 130 (50+80)	82R7950807	82R7950809	D	1	-	1
Lenght mm 110 (55+55)	82R7955557	82R7955559	D	1	-	1
Lenght mm 115 (55+60)	82R7955607	82R7955609	D	1	-	1
Lenght mm 120 (55+65)	82R7955657	82R7955659	D	1	-	1
Lenght mm 125 (55+70)	82R7955707	82R7955709	D	1	-	1
Lenght mm 130 (55+75)	82R7955757	82R7955759	D	1	-	1
Lenght mm 120 (60+60)	82R7960607	82R7960609	D	1	-	1
Lenght mm 125 (60+65)	82R7960657	82R7960659	D	1	-	1
Lenght mm 130 (60+70)	82R7960707	82R7960709	D	1	-	1

R7 **DOUBLE-PROFILE** cylinder. Nickel-plated brass flat key with 11 pins. **CODE CARD**.
DOUBLE FUNCTION, also operates when keyed-in. Antidrill pin inside the body and the barrel.
DIN 30 projecting cam. **5 KEYS**. Key head cap. 85 mm screw. (key blank code: 020909).

L C + D						
	BRASS	NICKEL				
Lenght mm 60 (30+30)	82R7930307...5	82R7930309...5	D	1	10	10
Lenght mm 65 (30+35)	82R7930357...5	82R7930359...5	D	1	10	10
Lenght mm 70 (30+40)	82R7930407...5	82R7930409...5	D	1	10	10
Lenght mm 75 (30+45)	82R7930457...5	82R7930459...5	D	1	10	10
Lenght mm 80 (30+50)	82R7930507...5	82R7930509...5	D	1	10	10
Lenght mm 85 (30+55)	82R7930557...5	82R7930559...5	D	1	10	10
Lenght mm 90 (30+60)	82R7930607...5	82R7930609...5	D	1	10	10
Lenght mm 95 (30+65)	82R7930657...5	82R7930659...5	D	1	-	1
Lenght mm 100 (30+70)	82R7930707...5	82R7930709...5	D	1	-	1
Lenght mm 105 (30+75)	82R7930757...5	82R7930759...5	D	1	-	1
Lenght mm 110 (30+80)	82R7930807...5	82R7930809...5	D	1	-	1
Lenght mm 115 (30+85)	82R7930857...5	82R7930859...5	D	1	-	1
Lenght mm 120 (30+90)	82R7930907...5	82R7930909...5	D	1	-	1
Lenght mm 70 (35+35)	82R7935357...5	82R7935359...5	D	1	10	10
Lenght mm 75 (35+40)	82R7935407...5	82R7935409...5	D	1	10	10
Lenght mm 80 (35+45)	82R7935457...5	82R7935459...5	D	1	10	10
Lenght mm 85 (35+50)	82R7935507...5	82R7935509...5	D	1	10	10
Lenght mm 90 (35+55)	82R7935557...5	82R7935559...5	D	1	10	10
Lenght mm 95 (35+60)	82R7935607...5	82R7935609...5	D	1	-	1
Lenght mm 100 (35+65)	82R7935657...5	82R7935659...5	D	1	-	1
Lenght mm 105 (35+70)	82R7935707...5	82R7935709...5	D	1	-	1
Lenght mm 110 (35+75)	82R7935757...5	82R7935759...5	D	1	-	1
Lenght mm 115 (35+80)	82R7935807...5	82R7935809...5	D	1	-	1
Lenght mm 120 (35+85)	82R7935857...5	82R7935859...5	D	1	-	1
Lenght mm 125 (35+90)	82R7935907...5	82R7935909...5	D	1	-	1
Lenght mm 80 (40+40)	82R7940407...5	82R7940409...5	D	1	10	10
Lenght mm 85 (40+45)	82R7940457...5	82R7940459...5	D	1	10	10
Lenght mm 90 (40+50)	82R7940507...5	82R7940509...5	D	1	10	10



[illegible]

Min. ord.
Multiple
package
Single
package
Status
Code

R7

R7 **EUROPEAN PROFILE** cylinder with **D8X16 SHAFT** preset for internal knob.

Nickel-plated brass flat key with 11 pins. **CODE CARD**. Antidrill pin inside the body and the barrel.

DIN 30 projecting cam. **3 KEYS**. Key head cap. 85 mm screw. (key blank code: 020909).



L	C + D	BRASS	NICKEL					
Lenght mm 56 (knob 28+28)		82R7628287	82R7628289	D	1	10	10	
Lenght mm 61 (knob 28+33)		82R7628337	82R7628339	D	1	10	10	
Lenght mm 60 (knob 30+30)		82R7630307	82R7630309	D	1	10	10	
Lenght mm 65 (knob 30+35)		82R7630357	82R7630359	D	1	10	10	
Lenght mm 70 (knob 30+40)		82R7630407	82R7630409	D	1	10	10	
Lenght mm 75 (knob 30+45)		82R7630457	82R7630459	D	1	10	10	
Lenght mm 80 (knob 30+50)		82R7630507	82R7630509	D	1	10	10	
Lenght mm 85 (knob 30+55)		82R7630557	82R7630559	D	1	10	10	
Lenght mm 90 (knob 30+60)		82R7630607	82R7630609	D	1	10	10	
Lenght mm 95 (knob 30+65)		82R7630657	82R7630659	D	1	-	1	
Lenght mm 100 (knob 30+70)		82R7630707	82R7630709	D	1	-	1	
Lenght mm 105 (knob 30+75)		82R7630757	82R7630759	D	1	-	1	
Lenght mm 110 (knob 30+80)		82R7630807	82R7630809	D	1	-	1	
Lenght mm 115 (knob 30+85)		82R7630857	82R7630859	D	1	-	1	
Lenght mm 120 (knob 30+90)		82R7630907	82R7630909	D	1	-	1	
Lenght mm 70 (knob 35+35)		82R7635357	82R7635359	D	1	10	10	
Lenght mm 75 (knob 35+40)		82R7635407	82R7635409	D	1	10	10	
Lenght mm 80 (knob 35+45)		82R7635457	82R7635459	D	1	10	10	
Lenght mm 85 (knob 35+50)		82R7635507	82R7635509	D	1	10	10	
Lenght mm 90 (knob 35+55)		82R7635557	82R7635559	D	1	10	10	
Lenght mm 95 (knob 35+60)		82R7635607	82R7635609	D	1	-	1	
Lenght mm 100 (knob 35+65)		82R7635657	82R7635659	D	1	-	1	
Lenght mm 105 (knob 35+70)		82R7635707	82R7635709	D	1	-	1	
Lenght mm 110 (knob 35+75)		82R7635757	82R7635759	D	1	-	1	
Lenght mm 115 (knob 35+80)		82R7635807	82R7635809	D	1	-	1	
Lenght mm 120 (knob 35+85)		82R7635857	82R7635859	D	1	-	1	
Lenght mm 125 (knob 35+90)		82R7635907	82R7635909	D	1	-	1	
Lenght mm 80 (knob 40+40)		82R7640407	82R7640409	D	1	10	10	
Lenght mm 85 (knob 40+45)		82R7640457	82R7640459	D	1	10	10	
Lenght mm 90 (knob 40+50)		82R7640507	82R7640509	D	1	10	10	
Lenght mm 95 (knob 40+55)		82R7640557	82R7640559	D	1	-	1	
Lenght mm 100 (knob 40+60)		82R7640607	82R7640609	D	1	-	1	
Lenght mm 105 (knob 40+65)		82R7640657	82R7640659	D	1	-	1	
Lenght mm 110 (knob 40+70)		82R7640707	82R7640709	D	1	-	1	
Lenght mm 115 (knob 40+75)		82R7640757	82R7640759	D	1	-	1	
Lenght mm 120 (knob 40+80)		82R7640807	82R7640809	D	1	-	1	
Lenght mm 125 (knob 40+85)		82R7640857	82R7640859	D	1	-	1	
Lenght mm 130 (knob 40+90)		82R7640907	82R7640909	D	1	-	1	
Lenght mm 90 (knob 45+45)		82R7645457	82R7645459	D	1	10	10	
Lenght mm 95 (knob 45+50)		82R7645507	82R7645509	D	1	-	1	
Lenght mm 100 (knob 45+55)		82R7645557	82R7645559	D	1	-	1	
Lenght mm 105 (knob 45+60)		82R7645607	82R7645609	D	1	-	1	
Lenght mm 110 (knob 45+65)		82R7645657	82R7645659	D	1	-	1	
Lenght mm 115 (knob 45+70)		82R7645707	82R7645709	D	1	-	1	
Lenght mm 120 (knob 45+75)		82R7645757	82R7645759	D	1	-	1	
Lenght mm 125 (knob 45+80)		82R7645807	82R7645809	D	1	-	1	

Min. ord.
Multiple
package
Single
package
Status
Code

R7



L	C + D	BRASS	NICKEL				
Lenght mm 130 (knob 45+85)		82R7645857	82R7645859	D	1	-	1
Lenght mm 100 (knob 50+50)		82R7650507	82R7650509	D	1	-	1
Lenght mm 105 (knob 50+55)		82R7650557	82R7650559	D	1	-	1
Lenght mm 110 (knob 50+60)		82R7650607	82R7650609	D	1	-	1
Lenght mm 115 (knob 50+65)		82R7650657	82R7650659	D	1	-	1
Lenght mm 120 (knob 50+70)		82R7650707	82R7650709	D	1	-	1
Lenght mm 125 (knob 50+75)		82R7650757	82R7650759	D	1	-	1
Lenght mm 130 (knob 50+80)		82R7650807	82R7650809	D	1	-	1
Lenght mm 110 (knob 55+55)		82R7655557	82R7655559	D	1	-	1
Lenght mm 115 (knob 55+60)		82R7655607	82R7655609	D	1	-	1
Lenght mm 120 (knob 55+65)		82R7655657	82R7655659	D	1	-	1
Lenght mm 125 (knob 55+70)		82R7655707	82R7655709	D	1	-	1
Lenght mm 130 (knob 55+75)		82R7655757	82R7655759	D	1	-	1
Lenght mm 120 (knob 60+60)		82R7660607	82R7660609	D	1	-	1
Lenght mm 125 (knob 60+65)		82R7660657	82R7660659	D	1	-	1
Lenght mm 130 (knob 60+70)		82R7660707	82R7660709	D	1	-	1


R7 **EUROPEAN PROFILE** cylinder with **D8X16 SHAFT** preset for internal knob.

Nickel-plated brass flat key with 11 pins. **CODE CARD**. Antidrill pin inside the body and the barrel.

DIN 30 projecting cam. **5 KEYS**. Key head cap. 85 mm screw. (key blank code: 020909).



L	C + D	BRASS	NICKEL				
Lenght mm 56 (knob 28+28)		82R7628287...5	82R7628289...5	D	1	10	10
Lenght mm 61 (knob 28+33)		82R7628337...5	82R7628339...5	D	1	10	10
Lenght mm 60 (knob 30+30)		82R7630307...5	82R7630309...5	D	1	10	10
Lenght mm 65 (knob 30+35)		82R7630357...5	82R7630359...5	D	1	10	10
Lenght mm 70 (knob 30+40)		82R7630407...5	82R7630409...5	D	1	10	10
Lenght mm 75 (knob 30+45)		82R7630457...5	82R7630459...5	D	1	10	10
Lenght mm 80 (knob 30+50)		82R7630507...5	82R7630509...5	D	1	10	10
Lenght mm 85 (knob 30+55)		82R7630557...5	82R7630559...5	D	1	10	10
Lenght mm 90 (knob 30+60)		82R7630607...5	82R7630609...5	D	1	10	10
Lenght mm 95 (knob 30+65)		82R7630657...5	82R7630659...5	D	1	-	1
Lenght mm 100 (knob 30+70)		82R7630707...5	82R7630709...5	D	1	-	1
Lenght mm 105 (knob 30+75)		82R7630757...5	82R7630759...5	D	1	-	1
Lenght mm 110 (knob 30+80)		82R7630807...5	82R7630809...5	D	1	-	1
Lenght mm 115 (knob 30+85)		82R7630857...5	82R7630859...5	D	1	-	1
Lenght mm 120 (knob 30+90)		82R7630907...5	82R7630909...5	D	1	-	1
Lenght mm 70 (knob 35+35)		82R7635357...5	82R7635359...5	D	1	10	10
Lenght mm 75 (knob 35+40)		82R7635407...5	82R7635409...5	D	1	10	10
Lenght mm 80 (knob 35+45)		82R7635457...5	82R7635459...5	D	1	10	10
Lenght mm 85 (knob 35+50)		82R7635507...5	82R7635509...5	D	1	10	10
Lenght mm 90 (knob 35+55)		82R7635557...5	82R7635559...5	D	1	10	10
Lenght mm 95 (knob 35+60)		82R7635607...5	82R7635609...5	D	1	-	1
Lenght mm 100 (knob 35+65)		82R7635657...5	82R7635659...5	D	1	-	1
Lenght mm 105 (knob 35+70)		82R7635707...5	82R7635709...5	D	1	-	1
Lenght mm 110 (knob 35+75)		82R7635757...5	82R7635759...5	D	1	-	1



Code
Status
Single
package
Multiple
package
Min. ord.

R7



L	C + D						
Lenght mm 115 (knob 35+80)		BRASS	NICKEL				
Lenght mm 120 (knob 35+85)		82R7635807...5	82R7635809...5	D	1	-	1
Lenght mm 125 (knob 35+90)		82R7635857...5	82R7635859...5	D	1	-	1
Lenght mm 80 (knob 40+40)		82R7635907...5	82R7635909...5	D	1	-	1
Lenght mm 85 (knob 40+45)		82R7640407...5	82R7640409...5	D	1	10	10
Lenght mm 90 (knob 40+50)		82R7640457...5	82R7640459...5	D	1	10	10
Lenght mm 95 (knob 40+55)		82R7640507...5	82R7640509...5	D	1	10	10
Lenght mm 100 (knob 40+60)		82R7640557...5	82R7640559...5	D	1	-	1
Lenght mm 105 (knob 40+65)		82R7640607...5	82R7640609...5	D	1	-	1
Lenght mm 110 (knob 40+70)		82R7640657...5	82R7640659...5	D	1	-	1
Lenght mm 115 (knob 40+75)		82R7640707...5	82R7640709...5	D	1	-	1
Lenght mm 120 (knob 40+80)		82R7640757...5	82R7640759...5	D	1	-	1
Lenght mm 125 (knob 40+85)		82R7640807...5	82R7640809...5	D	1	-	1
Lenght mm 130 (knob 40+90)		82R7640857...5	82R7640859...5	D	1	-	1
Lenght mm 90 (knob 45+45)		82R7640907...5	82R7640909...5	D	1	-	1
Lenght mm 95 (knob 45+50)		82R7645457...5	82R7645459...5	D	1	10	10
Lenght mm 100 (knob 45+55)		82R7645507...5	82R7645509...5	D	1	-	1
Lenght mm 105 (knob 45+60)		82R7645557...5	82R7645559...5	D	1	-	1
Lenght mm 110 (knob 45+65)		82R7645607...5	82R7645609...5	D	1	-	1
Lenght mm 115 (knob 45+70)		82R7645657...5	82R7645659...5	D	1	-	1
Lenght mm 120 (knob 45+75)		82R7645707...5	82R7645709...5	D	1	-	1
Lenght mm 125 (knob 45+80)		82R7645757...5	82R7645759...5	D	1	-	1
Lenght mm 130 (knob 45+85)		82R7645807...5	82R7645809...5	D	1	-	1
Lenght mm 100 (knob 50+50)		82R7645857...5	82R7645859...5	D	1	-	1
Lenght mm 105 (knob 50+55)		82R7650507...5	82R7650509...5	D	1	-	1
Lenght mm 110 (knob 50+60)		82R7650557...5	82R7650559...5	D	1	-	1
Lenght mm 115 (knob 50+65)		82R7650607...5	82R7650609...5	D	1	-	1
Lenght mm 120 (knob 50+70)		82R7650657...5	82R7650659...5	D	1	-	1
Lenght mm 125 (knob 50+75)		82R7650707...5	82R7650709...5	D	1	-	1
Lenght mm 130 (knob 50+80)		82R7650757...5	82R7650759...5	D	1	-	1
Lenght mm 110 (knob 55+55)		82R7650807...5	82R7650809...5	D	1	-	1
Lenght mm 115 (knob 55+60)		82R7655557...5	82R7655559...5	D	1	-	1
Lenght mm 120 (knob 55+65)		82R7655607...5	82R7655609...5	D	1	-	1
Lenght mm 125 (knob 55+70)		82R7655657...5	82R7655659...5	D	1	-	1
Lenght mm 130 (knob 55+75)		82R7655707...5	82R7655709...5	D	1	-	1
Lenght mm 120 (knob 60+60)		82R7655757...5	82R7655759...5	D	1	-	1
Lenght mm 125 (knob 60+65)		82R7660607...5	82R7660609...5	D	1	-	1
Lenght mm 130 (knob 60+70)		82R7660657...5	82R7660659...5	D	1	-	1
		82R7660707...5	82R7660709...5	D	1	-	1

Min. ord.
Multiple
package
Single
package
Status
Code

R7





R7 **EUROPEAN PROFILE** cylinder with **D8X75 SHAFT** preset for internal knob.

Nickel-plated brass flat key with 11 pins. **CODE CARD**. Antidrill pin inside the body and the barrel.

DIN 30 projecting cam. **3 KEYS**. Key head cap. 85 mm screw. (key blank code: 020909).



	L	C + D		BRASS	NICKEL				
Body length mm 60 (knob 30+30)				82R76D0307	82R76D0309	D	1	10	10
Body length mm 65 (knob 30+35)				82R76D0357	82R76D0359	D	1	10	10
Body length mm 70 (knob 30+40)				82R76D0407	82R76D0409	D	1	10	10
Body length mm 75 (knob 30+45)				82R76D0457	82R76D0459	C	1	10	10
Body length mm 80 (knob 30+50)				82R76D0507	82R76D0509	D	1	10	10
Body length mm 85 (knob 30+55)				82R76D0557	82R76D0559	D	1	10	10
Body length mm 90 (knob 30+60)				82R76D0607	82R76D0609	D	1	10	10
Body length mm 95 (knob 30+65)				82R76D0657	82R76D0659	D	1	-	1
Body length mm 100 (knob 30+70)				82R76D0707	82R76D0709	D	1	-	1



R7 **EUROPEAN PROFILE** cylinder with **D8X75 SHAFT** preset for internal knob.

Nickel-plated brass flat key with 11 pins. **CODE CARD**. Antidrill pin inside the body and the barrel.

DIN 30 projecting cam. **5 KEYS**. Key head cap. 85 mm screw. (key blank code: 020909).



	L	C + D		BRASS	NICKEL				
Body length mm 60 (knob 30+30)				82R76D0307...5	82R76D0309...5	B	1	10	10
Body length mm 65 (knob 30+35)				82R76D0357...5	82R76D0359...5	D	1	10	10
Body length mm 70 (knob 30+40)				82R76D0407...5	82R76D0409...5	D	1	10	10
Body length mm 75 (knob 30+45)				82R76D0457...5	82R76D0459...5	D	1	10	10
Body length mm 80 (knob 30+50)				82R76D0507...5	82R76D0509...5	D	1	10	10
Body length mm 85 (knob 30+55)				82R76D0557...5	82R76D0559...5	D	1	10	10
Body length mm 90 (knob 30+60)				82R76D0607...5	82R76D0609...5	D	1	10	10
Body length mm 95 (knob 30+65)				82R76D0657...5	82R76D0659...5	D	1	-	1
Body length mm 100 (knob 30+70)				82R76D0707...5	82R76D0709...5	D	1	-	1

Min. ord.
Multiple
package
Single
package
Status
Code

R7

R7 **EUROPEAN PROFILE** cylinder with internal **ROUND KNOB**.

Nickel-plated brass flat key with 11 pins. **CODE CARD**. Antidrill pin inside the body and the barrel.

DIN 30 projecting cam. **3 KEYS**. Key head cap. 85 mm screw. (key blank code: 020909).



L C + D

Lenght mm 56 (knob 28+28)

Lenght mm 61 (knob 28+33)

Lenght mm 60 (knob 30+30)

Lenght mm 65 (knob 30+35)

Lenght mm 70 (knob 30+40)

Lenght mm 75 (knob 30+45)

Lenght mm 80 (knob 30+50)

Lenght mm 85 (knob 30+55)

Lenght mm 90 (knob 30+60)

Lenght mm 95 (knob 30+65)

Lenght mm 100 (knob 30+70)

Lenght mm 105 (knob 30+75)

Lenght mm 110 (knob 30+80)

Lenght mm 115 (knob 30+85)

Lenght mm 120 (knob 30+90)

Lenght mm 70 (knob 35+35)

Lenght mm 75 (knob 35+40)

Lenght mm 80 (knob 35+45)

Lenght mm 85 (knob 35+50)

Lenght mm 90 (knob 35+55)

Lenght mm 95 (knob 35+60)

Lenght mm 100 (knob 35+65)

Lenght mm 105 (knob 35+70)

Lenght mm 110 (knob 35+75)

Lenght mm 115 (knob 35+80)

Lenght mm 120 (knob 35+85)

Lenght mm 125 (knob 35+90)

Lenght mm 80 (knob 40+40)

Lenght mm 85 (knob 40+45)

Lenght mm 90 (knob 40+50)

Lenght mm 95 (knob 40+55)

Lenght mm 100 (knob 40+60)

Lenght mm 105 (knob 40+65)

Lenght mm 110 (knob 40+70)

Lenght mm 115 (knob 40+75)

Lenght mm 120 (knob 40+80)

Lenght mm 125 (knob 40+85)

Lenght mm 130 (knob 40+90)

Lenght mm 90 (knob 45+45)

Lenght mm 95 (knob 45+50)

Lenght mm 100 (knob 45+55)

Lenght mm 105 (knob 45+60)

Lenght mm 110 (knob 45+65)

Lenght mm 115 (knob 45+70)

Lenght mm 120 (knob 45+75)

Lenght mm 125 (knob 45+80)

BRASS

82R7828287

NICKEL

82R7828289

D 1 10 10

82R7828337

82R7828339

D 1 10 10

82R7830307

82R7830309

D 1 10 10

82R7830357

82R7830359

D 1 10 10

82R7830407

82R7830409

D 1 10 10

82R7830457

82R7830459

D 1 10 10

82R7830507

82R7830509

D 1 10 10

82R7830557

82R7830559

D 1 10 10

82R7830607

82R7830609

D 1 10 10

82R7830657

82R7830659

D 1 - 1

82R7830707

82R7830709

D 1 - 1

82R7830757

82R7830759

D 1 - 1

82R7830807

82R7830809

D 1 - 1

82R7830857

82R7830859

D 1 - 1

82R7830907

82R7830909

D 1 - 1

82R7835357

82R7835359

D 1 10 10

82R7835407

82R7835409

D 1 10 10

82R7835457

82R7835459

D 1 10 10

82R7835507

82R7835509

D 1 10 10

82R7835557

82R7835559

D 1 10 10

82R7835607

82R7835609

D 1 - 1

82R7835657

82R7835659

D 1 - 1

82R7835707

82R7835709

D 1 - 1

82R7835757

82R7835759

D 1 - 1

82R7835807

82R7835809

D 1 - 1

82R7835857

82R7835859

D 1 - 1

82R7835907

82R7835909

D 1 - 1

82R7840407

82R7840409

D 1 10 10

82R7840457

82R7840459

D 1 10 10

82R7840507

82R7840509

D 1 10 10

82R7840557

82R7840559

D 1 - 1

82R7840607

82R7840609

D 1 - 1

82R7840657

82R7840659

D 1 - 1

82R7840707

82R7840709

D 1 - 1

82R7840757

82R7840759

D 1 - 1

82R7840807

82R7840809

D 1 - 1

82R7840857

82R7840859

D 1 - 1

82R7840907

82R7840909

D 1 - 1

82R7845457

82R7845459

D 1 10 10

82R7845507

82R7845509

D 1 - 1

82R7845557

82R7845559

D 1 - 1

82R7845607

82R7845609

D 1 - 1

82R7845657

82R7845659

D 1 - 1

82R7845707

82R7845709

D 1 - 1

82R7845757

82R7845759

D 1 - 1

82R7845807

82R7845809

D 1 - 1



Code
Status
Single
package
Multiple
package
Min. ord.

R7



L	C + D	BRASS	NICKEL				
Lenght mm 130 (knob 45+85)		82R7845857	82R7845859	D	1	-	1
Lenght mm 100 (knob 50+50)		82R7850507	82R7850509	D	1	-	1
Lenght mm 105 (knob 50+55)		82R7850557	82R7850559	D	1	-	1
Lenght mm 110 (knob 50+60)		82R7850607	82R7850609	D	1	-	1
Lenght mm 115 (knob 50+65)		82R7850657	82R7850659	D	1	-	1
Lenght mm 120 (knob 50+70)		82R7850707	82R7850709	D	1	-	1
Lenght mm 125 (knob 50+75)		82R7850757	82R7850759	D	1	-	1
Lenght mm 130 (knob 50+80)		82R7850807	82R7850809	D	1	-	1
Lenght mm 110 (knob 55+55)		82R7855557	82R7855559	D	1	-	1
Lenght mm 115 (knob 55+60)		82R7855607	82R7855609	D	1	-	1
Lenght mm 120 (knob 55+65)		82R7855657	82R7855659	D	1	-	1
Lenght mm 125 (knob 55+70)		82R7855707	82R7855709	D	1	-	1
Lenght mm 130 (knob 55+75)		82R7855757	82R7855759	D	1	-	1
Lenght mm 120 (knob 60+60)		82R7860607	82R7860609	D	1	-	1
Lenght mm 125 (knob 60+65)		82R7860657	82R7860659	D	1	-	1
Lenght mm 130 (knob 60+70)		82R7860707	82R7860709	D	1	-	1


R7 EUROPEAN PROFILE cylinder with internal **ROUND KNOB**.

Nickel-plated brass flat key with 11 pins. **CODE CARD**. Antidrill pin inside the body and the barrel.

DIN 30 projecting cam. **5 KEYS**. Key head cap. 85 mm screw. (key blank code: 020909).



L	C + D	BRASS	NICKEL				
Lenght mm 56 (knob 28+28)		82R7828287...5	82R7828289...5	D	1	10	10
Lenght mm 61 (knob 28+33)		82R7828337...5	82R7828339...5	D	1	10	10
Lenght mm 60 (knob 30+30)		82R7830307...5	82R7830309...5	D	1	10	10
Lenght mm 65 (knob 30+35)		82R7830357...5	82R7830359...5	D	1	10	10
Lenght mm 70 (knob 30+40)		82R7830407...5	82R7830409...5	D	1	10	10
Lenght mm 75 (knob 30+45)		82R7830457...5	82R7830459...5	D	1	10	10
Lenght mm 80 (knob 30+50)		82R7830507...5	82R7830509...5	D	1	10	10
Lenght mm 85 (knob 30+55)		82R7830557...5	82R7830559...5	D	1	10	10
Lenght mm 90 (knob 30+60)		82R7830607...5	82R7830609...5	D	1	10	10
Lenght mm 95 (knob 30+65)		82R7830657...5	82R7830659...5	D	1	-	1
Lenght mm 100 (knob 30+70)		82R7830707...5	82R7830709...5	D	1	-	1
Lenght mm 105 (knob 30+75)		82R7830757...5	82R7830759...5	D	1	-	1
Lenght mm 110 (knob 30+80)		82R7830807...5	82R7830809...5	D	1	-	1
Lenght mm 115 (knob 30+85)		82R7830857...5	82R7830859...5	D	1	-	1
Lenght mm 120 (knob 30+90)		82R7830907...5	82R7830909...5	D	1	-	1
Lenght mm 70 (knob 35+35)		82R7835357...5	82R7835359...5	D	1	10	10
Lenght mm 75 (knob 35+40)		82R7835407...5	82R7835409...5	D	1	10	10
Lenght mm 80 (knob 35+45)		82R7835457...5	82R7835459...5	D	1	10	10
Lenght mm 85 (knob 35+50)		82R7835507...5	82R7835509...5	D	1	10	10
Lenght mm 90 (knob 35+55)		82R7835557...5	82R7835559...5	D	1	10	10
Lenght mm 95 (knob 35+60)		82R7835607...5	82R7835609...5	D	1	-	1
Lenght mm 100 (knob 35+65)		82R7835657...5	82R7835659...5	D	1	-	1
Lenght mm 105 (knob 35+70)		82R7835707...5	82R7835709...5	D	1	-	1
Lenght mm 110 (knob 35+75)		82R7835757...5	82R7835759...5	D	1	-	1
Lenght mm 115 (knob 35+80)		82R7835807...5	82R7835809...5	D	1	-	1



R7



		Code		Status	Single package	Multiple package	Min. ord.
							
		BRASS	NICKEL				
L	C + D						
Lenght mm 120 (knob 35+85)		82R7835857...5	82R7835859...5	D	1	-	1
Lenght mm 125 (knob 35+90)		82R7835907...5	82R7835909...5	D	1	-	1
Lenght mm 80 (knob 40+40)		82R7840407...5	82R7840409...5	D	1	10	10
Lenght mm 85 (knob 40+45)		82R7840457...5	82R7840459...5	D	1	10	10
Lenght mm 90 (knob 40+50)		82R7840507...5	82R7840509...5	D	1	10	10
Lenght mm 95 (knob 40+55)		82R7840557...5	82R7840559...5	D	1	-	1
Lenght mm 100 (knob 40+60)		82R7840607...5	82R7840609...5	D	1	-	1
Lenght mm 105 (knob 40+65)		82R7840657...5	82R7840659...5	D	1	-	1
Lenght mm 110 (knob 40+70)		82R7840707...5	82R7840709...5	D	1	-	1
Lenght mm 115 (knob 40+75)		82R7840757...5	82R7840759...5	D	1	-	1
Lenght mm 120 (knob 40+80)		82R7840807...5	82R7840809...5	D	1	-	1
Lenght mm 125 (knob 40+85)		82R7840857...5	82R7840859...5	D	1	-	1
Lenght mm 130 (knob 40+90)		82R7840907...5	82R7840909...5	D	1	-	1
Lenght mm 90 (knob 45+45)		82R7845457...5	82R7845459...5	D	1	10	10
Lenght mm 95 (knob 45+50)		82R7845507...5	82R7845509...5	D	1	-	1
Lenght mm 100 (knob 45+55)		82R7845557...5	82R7845559...5	D	1	-	1
Lenght mm 105 (knob 45+60)		82R7845607...5	82R7845609...5	D	1	-	1
Lenght mm 110 (knob 45+65)		82R7845657...5	82R7845659...5	D	1	-	1
Lenght mm 115 (knob 45+70)		82R7845707...5	82R7845709...5	D	1	-	1
Lenght mm 120 (knob 45+75)		82R7845757...5	82R7845759...5	D	1	-	1
Lenght mm 125 (knob 45+80)		82R7845807...5	82R7845809...5	D	1	-	1
Lenght mm 130 (knob 45+85)		82R7845857...5	82R7845859...5	D	1	-	1
Lenght mm 100 (knob 50+50)		82R7850507...5	82R7850509...5	D	1	-	1
Lenght mm 105 (knob 50+55)		82R7850557...5	82R7850559...5	D	1	-	1
Lenght mm 110 (knob 50+60)		82R7850607...5	82R7850609...5	D	1	-	1
Lenght mm 115 (knob 50+65)		82R7850657...5	82R7850659...5	D	1	-	1
Lenght mm 120 (knob 50+70)		82R7850707...5	82R7850709...5	D	1	-	1
Lenght mm 125 (knob 50+75)		82R7850757...5	82R7850759...5	D	1	-	1
Lenght mm 130 (knob 50+80)		82R7850807...5	82R7850809...5	D	1	-	1
Lenght mm 110 (knob 55+55)		82R7855557...5	82R7855559...5	D	1	-	1
Lenght mm 115 (knob 55+60)		82R7855607...5	82R7855609...5	D	1	-	1
Lenght mm 120 (knob 55+65)		82R7855657...5	82R7855659...5	D	1	-	1
Lenght mm 125 (knob 55+70)		82R7855707...5	82R7855709...5	D	1	-	1
Lenght mm 130 (knob 55+75)		82R7855757...5	82R7855759...5	D	1	-	1
Lenght mm 120 (knob 60+60)		82R7860607...5	82R7860609...5	D	1	-	1
Lenght mm 125 (knob 60+65)		82R7860657...5	82R7860659...5	D	1	-	1
Lenght mm 130 (knob 60+70)		82R7860707...5	82R7860709...5	D	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.

R7 with microswitch



R7 "PATENTED" and M26 THREADED cylinder with signaling MICROSWITCH.
Nickel-plated brass flat key with plasticised head, 11 pins. CODE CARD.
Nickel-plated brass. 3 KEYS. Key head cap. (key blank code: 020909)
Common contact + normally opened + normally closed

NICKEL
855579 D 1 5 5

Cylinders

R6


Min. ord.
Multiple
package
Single
package
Status
Code

R6

R6 **SINGLE-PROFILE** cylinder. Nickel-plated brass flat key with 6 pins. Antidrill pin inside the cylinder body.
DIN 8-position cam. **3 KEYS**. 65 mm screw. (key blank code: 020809).



L	C + D	BRASS	NICKEL				
Lenght mm 40 (30+10)		880930107	880930109	A	1	10	10
Lenght mm 45 (35+10)		880935107	880935109	B	1	10	10
Lenght mm 50 (40+10)		880940107	880940109	B	1	10	10
Lenght mm 60 (50+10)		880950107	880950109	B	1	10	10
Lenght mm 65 (55+10)		880955107	880955109	C	1	10	10
Lenght mm 70 (60+10)		880960107	880960109	B	1	10	10
Lenght mm 75 (65+10)		880965107	880965109	D	1	10	10
Lenght mm 80 (70+10)		880970107	880970109	D	1	10	10
Lenght mm 90 (80+10)		880980107	880980109	D	1	10	10
Lenght mm 100 (90+10)		880990107	880990109	D	1	-	1



R6 **SINGLE-PROFILE** cylinder. Nickel-plated brass flat key with 6 pins. Antidrill pin inside the cylinder body.
DIN 8-position cam. **5 KEYS**. 65 mm screw. (key blank code: 020809).



L	C + D	BRASS	NICKEL				
Lenght mm 40 (30+10)		880930107..5	880930109..5	B	1	10	10
Lenght mm 45 (35+10)		880935107..5	880935109..5	D	1	10	10
Lenght mm 50 (40+10)		880940107..5	880940109..5	C	1	10	10
Lenght mm 60 (50+10)		880950107..5	880950109..5	D	1	10	10
Lenght mm 65 (55+10)		880955107..5	880955109..5	D	1	10	10
Lenght mm 70 (60+10)		880960107..5	880960109..5	D	1	10	10
Lenght mm 75 (65+10)		880965107..5	880965109..5	D	1	10	10
Lenght mm 80 (70+10)		880970107..5	880970109..5	D	1	10	10
Lenght mm 90 (80+10)		880980107..5	880980109..5	D	1	10	10
Lenght mm 100 (90+10)		880990107..5	880990109..5	D	1	-	1

Min. ord.
Multiple
package
Single
package
Status
Code

R6

R6 **DOUBLE-PROFILE** cylinder. Nickel-plated brass flat key with 6 pins. Antidrill pin inside the cylinder body.
DIN 30 projecting cam. **3 KEYS**. 65 mm screw.
(key blank code: 020809).



L C + D

Lenght mm 56 (28+28)

Lenght mm 61 (28+33)

Lenght mm 60 (30+30)

Lenght mm 65 (30+35)

Lenght mm 70 (30+40)

Lenght mm 75 (30+45)

Lenght mm 80 (30+50)

Lenght mm 85 (30+55)

Lenght mm 90 (30+60)

Lenght mm 95 (30+65)

Lenght mm 100 (30+70)

Lenght mm 105 (30+75)

Lenght mm 110 (30+80)

Lenght mm 70 (35+35)

Lenght mm 75 (35+40)

Lenght mm 80 (35+45)

Lenght mm 85 (35+50)

Lenght mm 100 (35+65)

Lenght mm 80 (40+40)

Lenght mm 85 (40+45)

Lenght mm 90 (40+50)

Lenght mm 95 (40+55)

Lenght mm 100 (40+60)

Lenght mm 90 (45+45)

Lenght mm 100 (50+50)

Lenght mm 105 (50+55)

Lenght mm 110 (50+60)

Lenght mm 120 (65+55)

BRASS

NICKEL

880928287

880928289

A

1

10

10

880928337

880928339

A

1

10

10

880930307

880930309

A

1

10

10

880930357

880930359

A

1

10

10

880930407

880930409

A

1

10

10

880930457

880930459

A

1

10

10

880930507

880930509

A

1

10

10

880930557

880930559

A

1

10

10

880930607

880930609

A

1

10

10

880930657

880930659

B

1

-

1

880930707

880930709

B

1

-

1

880930757

880930759

D

1

-

1

880930807

880930809

C

1

-

1

880935357

880935359

A

1

10

10

880935407

880935409

B

1

10

10

880935457

880935459

A

1

10

10

880935507

880935509

B

1

10

10

880935657

880935659

C

1

-

1

880940407

880940409

A

1

10

10

880940457

880940459

B

1

10

10

880940507

880940509

A

1

10

10

880940557

880940559

B

1

-

1

880940607

880940609

B

1

-

1

880945457

880945459

A

1

10

10

880950507

880950509

B

1

-

1

880950557

880950559

C

1

-

1

880950607

880950609

B

1

-

1

880965557


880965559

C

1

-

1



Min. ord.
Confezione
multipla
Confezione
singola
Status
Code

R6

R6 **DOUBLE-PROFILE** cylinder. Nickel-plated brass flat key with 6 pins. Antidrill pin inside the cylinder body.
DIN 30 projecting cam. **5 KEYS**. 65 mm screw.
(key blank code: 020809).



L C + D

Lenght mm 56 (28+28)

Lenght mm 61 (28+33)

Lenght mm 60 (30+30)

Lenght mm 65 (30+35)

Lenght mm 70 (30+40)

Lenght mm 75 (30+45)

Lenght mm 80 (30+50)

Lenght mm 85 (30+55)

Lenght mm 90 (30+60)

Lenght mm 95 (30+65)

Lenght mm 100 (30+70)

Lenght mm 105 (30+75)

Lenght mm 110 (30+80)

Lenght mm 70 (35+35)

Lenght mm 75 (35+40)

Lenght mm 80 (35+45)

Lenght mm 85 (35+50)

Lenght mm 100 (35+65)

Lenght mm 80 (40+40)

Lenght mm 85 (40+45)

Lenght mm 90 (40+50)

Lenght mm 95 (40+55)

Lenght mm 100 (40+60)

Lenght mm 90 (45+45)

Lenght mm 100 (50+50)

Lenght mm 105 (50+55)

Lenght mm 110 (50+60)

Lenght mm 120 (65+55)

BRASS

NICKEL

880928287..5

880928289..5

C

1

10

10

880928337..5

880928339..5

B

1

10

10

880930307..5

880930309..5

A

1

10

10

880930357..5

880930359..5

A

1

10

10

880930407..5

880930409..5

A

1

10

10

880930457..5

880930459..5

B

1

10

10

880930507..5

880930509..5

A

1

10

10

880930557..5

880930559..5

B

1

10

10

880930607..5

880930609..5

A

1

10

10

880930657..5

880930659..5

C

1

-

1

880930707..5

880930709..5

B

1

-

1

880930757..5

880930759..5

D

1

-

1

880930807..5

880930809..5

B

1

-

1

880935357..5

880935359..5

A

1

10

10

880935407..5

880935409..5

B

1

10

10

880935457..5

880935459..5

B

1

10

10

880935507..5

880935509..5

C

1

10

10

880935657..5

880935659..5

C

1

-

1

880940407..5

880940409..5

A

1

10

10

880940457..5

880940459..5

B

1

10

10

880940507..5

880940509..5

B

1

10

10

880940557..5

880940559..5

C

1

-

1

880940607..5

880940609..5

B

1

-

1

880945457..5

880945459..5

B

1

10

10

880950507..5

880950509..5

B

1

-

1

880950557..5

880950559..5

D

1

-

1

880950607..5

880950609..5

C

1

-

1

880965557..5


880965559..5

D

1

-

1



Code
Status
Single
package
Multiple
package
Min. ord.

R6

R6 **SINGLE-PROFILE** cylinder. Nickel-plated brass flat key with 6 pins. Antidrill pin inside the cylinder body.
DIN 8-position cam. **3 KEYS**. 65 mm screw.
(key blank code: 020809).

L C + D

Lenght mm 40 (30+10) **24 KT. GOLD-PLATED BRASS**

Lenght mm 45 (35+10) **24 KT. GOLD-PLATED BRASS**



88093010A D 1 10 10

88093510A D 1 10 10

L C + D

Lenght mm 40 (30+10) **ANTIQUE BRONZED BRASS**

Lenght mm 45 (35+10) **ANTIQUE BRONZED BRASS**



88093010B D 1 10 10

88093510B D 1 10 10

L C + D

Lenght mm 40 (30+10) **POLISHED CHROME-PLATED BRASS**

Lenght mm 45 (35+10) **POLISHED CHROME-PLATED BRASS**



88093010K D 1 10 10

88093510K D 1 10 10

L C + D

Lenght mm 40 (30+10) **POLISHED AND LACQUERED BRASS**

Lenght mm 45 (35+10) **POLISHED AND LACQUERED BRASS**



88093010L D 1 10 10

88093510L D 1 10 10

L C + D


Lenght mm 40 (30+10) **SATIN NICKEL-PLATED BRASS**

Lenght mm 45 (35+10) **SATIN NICKEL-PLATED BRASS**



88093010N D 1 10 10

88093510N D 1 10 10



Code
Status
Single
package
Multiple
package
Min. ord.

R6

R6 **DOUBLE-PROFILE** cylinder. Nickel-plated brass flat key with 6 pins. Antidrill pin inside the cylinder body.
DIN 30 projecting cam. **3 KEYS**. 65 mm screw.
(key blank code: 020809).



L C + D

Lenght mm 60 (30+30) **24 KT. GOLD-PLATED BRASS**
Lenght mm 70 (30+40) **24 KT. GOLD-PLATED BRASS**
Lenght mm 70 (35+35) **24 KT. GOLD-PLATED BRASS**
Lenght mm 80 (40+40) **24 KT. GOLD-PLATED BRASS**



Code	Status	Single package	Multiple package	Min. ord.
88093030A	D	1	10	10
88093040A	D	1	10	10
88093535A	D	1	10	10
88094040A	D	1	10	10

L C + D

Lenght mm 60 (30+30) **ANTIQUE BRONZED BRASS**
Lenght mm 70 (30+40) **ANTIQUE BRONZED BRASS**
Lenght mm 70 (35+35) **ANTIQUE BRONZED BRASS**
Lenght mm 80 (40+40) **ANTIQUE BRONZED BRASS**



Code	Status	Single package	Multiple package	Min. ord.
88093030B	D	1	10	10
88093040B	D	1	10	10
88093535B	D	1	10	10
88094040B	D	1	10	10

L C + D

Lenght mm 60 (30+30) **POLISHED CHROME-PLATED BRASS**
Lenght mm 70 (30+40) **POLISHED CHROME-PLATED BRASS**
Lenght mm 70 (35+35) **POLISHED CHROME-PLATED BRASS**
Lenght mm 80 (40+40) **POLISHED CHROME-PLATED BRASS**



Code	Status	Single package	Multiple package	Min. ord.
88093030K	D	1	10	10
88093040K	D	1	10	10
88093535K	D	1	10	10
88094040K	D	1	10	10

L C + D

Lenght mm 60 (30+30) **POLISHED AND LACQUERED BRASS**
Lenght mm 70 (30+40) **POLISHED AND LACQUERED BRASS**
Lenght mm 70 (35+35) **POLISHED AND LACQUERED BRASS**
Lenght mm 80 (40+40) **POLISHED AND LACQUERED BRASS**




Code	Status	Single package	Multiple package	Min. ord.
88093030L	D	1	10	10
88093040L	D	1	10	10
88093535L	C	1	10	10
88094040L	D	1	10	10

L C + D

Lenght mm 60 (30+30) **SATIN NICKEL-PLATED BRASS**
Lenght mm 70 (30+40) **SATIN NICKEL-PLATED BRASS**
Lenght mm 70 (35+35) **SATIN NICKEL-PLATED BRASS**
Lenght mm 80 (40+40) **SATIN NICKEL-PLATED BRASS**




Code	Status	Single package	Multiple package	Min. ord.
88093030N	D	1	10	10
88093040N	D	1	10	10
88093535N	D	1	10	10
88094040N	D	1	10	10



Min. ord.
Multiple
package
Single
package
Status
Code

R6

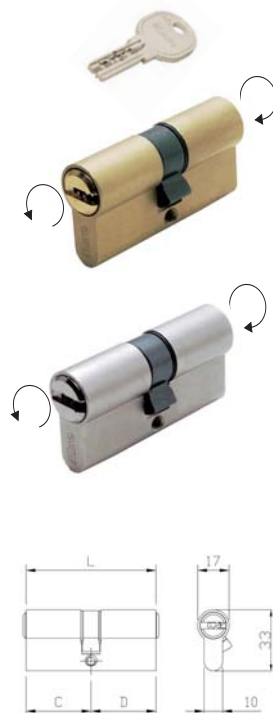

R6 **DOUBLE-PROFILE** cylinder. Nickel-plated brass flat key with 6 pins.
DOUBLE FUNCTION, also operates when keyed-in. Antidrink pin inside the cylinder body.
DIN 30 projecting cam. **3 KEYS**. 65 mm screw. (key blank code: 020809).



L C + D	BRASS	NICKEL					
Lenght mm 60 (30+30)	889930307	889930309	B	1	10	10	
Lenght mm 65 (30+35)	889930357	889930359	B	1	10	10	
Lenght mm 70 (30+40)	889930407	889930409	C	1	10	10	
Lenght mm 75 (30+45)	889930457	889930459	C	1	10	10	
Lenght mm 80 (30+50)	889930507	889930509	C	1	10	10	
Lenght mm 85 (30+55)	889930557	889930559	B	1	10	10	
Lenght mm 90 (30+60)	889930607	889930609	C	1	10	10	
Lenght mm 95 (30+65)	889930657	889930659	D	1	-	1	
Lenght mm 100 (30+70)	889930707	889930709	D	1	-	1	
Lenght mm 105 (30+75)	889930757	889930759	D	1	-	1	
Lenght mm 110 (30+80)	889930807	889930809	D	1	-	1	
Lenght mm 70 (35+35)	889935357	889935359	D	1	10	10	
Lenght mm 75 (35+40)	889935407	889935409	C	1	10	10	
Lenght mm 80 (35+45)	889935457	889935459	C	1	10	10	
Lenght mm 85 (35+50)	889935507	889935509	C	1	10	10	
Lenght mm 80 (40+40)	889940407	889940409	C	1	10	10	
Lenght mm 85 (40+45)	889940457	889940459	C	1	10	10	
Lenght mm 90 (40+50)	889940507	889940509	B	1	10	10	
Lenght mm 95 (40+55)	889940557	889940559	D	1	-	1	
Lenght mm 100 (40+60)	889940607	889940609	D	1	-	1	
Lenght mm 90 (45+45)	889945457	889945459	D	1	10	10	
Lenght mm 100 (50+50)	889950507	889950509	D	1	-	1	
Lenght mm 110 (50+60)	889950607	889950609	D	1	-	1	

Min. ord.
Multiple
package
Single
package
Status
Code

R6



R6 **DOUBLE-PROFILE** cylinder. Nickel-plated brass flat key with 6 pins.
DOUBLE FUNCTION, also operates when keyed-in. Antidrink pin inside the cylinder body.
DIN 30 projecting cam. **5 KEYS**. 65 mm screw. (key blank code: 020809).

L C + D

	BRASS	NICKEL					
Lenght mm 60 (30+30)	889930307..5	889930309..5	C	1	10	10	
Lenght mm 65 (30+35)	889930357..5	889930359..5	B	1	10	10	
Lenght mm 70 (30+40)	889930407..5	889930409..5	C	1	10	10	
Lenght mm 75 (30+45)	889930457..5	889930459..5	D	1	10	10	
Lenght mm 80 (30+50)	889930507..5	889930509..5	C	1	10	10	
Lenght mm 85 (30+55)	889930557..5	889930559..5	D	1	10	10	
Lenght mm 90 (30+60)	889930607..5	889930609..5	D	1	10	10	
Lenght mm 95 (30+65)	889930657..5	889930659..5	D	1	-	1	
Lenght mm 100 (30+70)	889930707..5	889930709..5	D	1	-	1	
Lenght mm 105 (30+75)	889930757..5	889930759..5	D	1	-	1	
Lenght mm 110 (30+80)	889930807..5	889930809..5	D	1	-	1	
Lenght mm 70 (35+35)	889935357..5	889935359..5	C	1	10	10	
Lenght mm 75 (35+40)	889935407..5	889935409..5	D	1	10	10	
Lenght mm 80 (35+45)	889935457..5	889935459..5	D	1	10	10	
Lenght mm 85 (35+50)	889935507..5	889935509..5	D	1	10	10	
Lenght mm 80 (40+40)	889940407..5	889940409..5	C	1	10	10	
Lenght mm 85 (40+45)	889940457..5	889940459..5	C	1	10	10	
Lenght mm 90 (40+50)	889940507..5	889940509..5	B	1	10	10	
Lenght mm 95 (40+55)	889940557..5	889940559..5	D	1	-	1	
Lenght mm 100 (40+60)	889940607..5	889940609..5	D	1	-	1	
Lenght mm 90 (45+45)	889945457..5	889945459..5	C	1	10	10	
Lenght mm 100 (50+50)	889950507..5	889950509..5	D	1	-	1	
Lenght mm 110 (50+60)	889950607..5	889950609..5	D	1	-	1	

Min. ord.
Multiple
package
Single
package
Status
Code

R6

R6 **EUROPEAN PROFILE** cylinder with internal **ROUND KNOB** and nickel-plated brass flat key with 6 pins external. Antidrill pin inside the cylinder body. DIN 30 projecting cam. **3 KEYS**. 65 mm screw. (key blank code: 020809).



BRASS

NICKEL

	L	C + D					
Lenght mm	56 (knob 28+28)		888928287	888928289	D	1	10 10
Lenght mm	61 (knob 28+33)		888928337	888928339	D	1	10 10
Lenght mm	60 (knob 30+30)		888930307	888930309	D	1	10 10
Lenght mm	65 (knob 30+35)		888930357	888930359	D	1	10 10
Lenght mm	70 (knob 30+40)		888930407	888930409	D	1	10 10
Lenght mm	75 (knob 30+45)		888930457	888930459	D	1	10 10
Lenght mm	80 (knob 30+50)		888930507	888930509	D	1	10 10
Lenght mm	85 (knob 30+55)		888930557	888930559	D	1	10 10
Lenght mm	90 (knob 30+60)		888930607	888930609	D	1	10 10
Lenght mm	95 (knob 30+65)		888930657	888930659	D	1	- 1
Lenght mm	100 (knob 30+70)		888930707	888930709	D	1	- 1
Lenght mm	105 (knob 30+75)		888930757	888930759	D	1	- 1
Lenght mm	110 (knob 30+80)		888930807	888930809	D	1	- 1
Lenght mm	115 (knob 30+85)		888930857	888930859	D	1	- 1
Lenght mm	120 (knob 30+90)		888930907	888930909	D	1	- 1
Lenght mm	70 (knob 35+35)		888935357	888935359	D	1	10 10
Lenght mm	75 (knob 35+40)		888935407	888935409	D	1	10 10
Lenght mm	80 (knob 35+45)		888935457	888935459	D	1	10 10
Lenght mm	85 (knob 35+50)		888935507	888935509	D	1	10 10
Lenght mm	90 (knob 35+55)		888935557	888935559	D	1	10 10
Lenght mm	95 (knob 35+60)		888935607	888935609	D	1	- 1
Lenght mm	100 (knob 35+65)		888935657	888935659	D	1	- 1
Lenght mm	105 (knob 35+70)		888935707	888935709	D	1	- 1
Lenght mm	110 (knob 35+75)		888935757	888935759	D	1	- 1
Lenght mm	115 (knob 35+80)		888935807	888935809	D	1	- 1
Lenght mm	120 (knob 35+85)		888935857	888935859	D	1	- 1
Lenght mm	125 (knob 35+90)		888935907	888935909	D	1	- 1
Lenght mm	80 (knob 40+40)		888940407	888940409	D	1	10 10
Lenght mm	85 (knob 40+45)		888940457	888940459	D	1	10 10
Lenght mm	90 (knob 40+50)		888940507	888940509	D	1	10 10
Lenght mm	95 (knob 40+55)		888940557	888940559	D	1	- 1
Lenght mm	100 (knob 40+60)		888940607	888940609	D	1	- 1
Lenght mm	105 (knob 40+65)		888940657	888940659	D	1	- 1
Lenght mm	110 (knob 40+70)		888940707	888940709	D	1	- 1
Lenght mm	115 (knob 40+75)		888940757	888940759	D	1	- 1
Lenght mm	120 (knob 40+80)		888940807	888940809	D	1	- 1
Lenght mm	125 (knob 40+85)		888940857	888940859	D	1	- 1
Lenght mm	130 (knob 40+90)		888940907	888940909	D	1	- 1
Lenght mm	90 (knob 45+45)		888945457	888945459	D	1	10 10
Lenght mm	95 (knob 45+50)		888945507	888945509	D	1	- 1
Lenght mm	100 (knob 45+55)		888945557	888945559	D	1	- 1
Lenght mm	105 (knob 45+60)		888945607	888945609	D	1	- 1
Lenght mm	110 (knob 45+65)		888945657	888945659	D	1	- 1
Lenght mm	115 (knob 45+70)		888945707	888945709	D	1	- 1
Lenght mm	120 (knob 45+75)		888945757	888945759	D	1	- 1
Lenght mm	125 (knob 45+80)		888945807	888945809	D	1	- 1



Code
Status
Single
package
Multiple
package
Min. ord.

R6




	L	C + D					
			BRASS	NICKEL			
Lenght mm	130 (knob 45+85)		888945857	888945859	D	1	- 1
Lenght mm	100 (knob 50+50)		888950507	888950509	D	1	- 1
Lenght mm	105 (knob 50+55)		888950557	888950559	D	1	- 1
Lenght mm	110 (knob 50+60)		888950607	888950609	D	1	- 1
Lenght mm	115 (knob 50+65)		888950657	888950659	D	1	- 1
Lenght mm	120 (knob 50+70)		888950707	888950709	D	1	- 1
Lenght mm	125 (knob 50+75)		888950757	888950759	D	1	- 1
Lenght mm	130 (knob 50+80)		888950807	888950809	D	1	- 1
Lenght mm	110 (knob 55+55)		888955557	888955559	D	1	- 1
Lenght mm	115 (knob 55+60)		888955607	888955609	D	1	- 1
Lenght mm	120 (knob 55+65)		888955657	888955659	D	1	- 1
Lenght mm	125 (knob 55+70)		888955707	888955709	D	1	- 1
Lenght mm	130 (knob 55+75)		888955757	888955759	D	1	- 1
Lenght mm	120 (knob 60+60)		888960607	888960609	D	1	- 1
Lenght mm	125 (knob 60+65)		888960657	888960659	D	1	- 1
Lenght mm	130 (knob 60+70)		888960707	888960709	D	1	- 1

R6 **EUROPEAN PROFILE** cylinder with internal **ROUND KNOB** and nickel-plated brass flat key with 6 pins external. Antidrill pin inside the cylinder body. DIN 30 projecting cam.

5 KEYS. 65 mm screw. (key blank code: 020809).



	L	C + D					
			BRASS	NICKEL			
Lenght mm	56 (knob 28+28)		888928287...5	888928289...5	D	1	10 10
Lenght mm	61 (knob 28+33)		888928337...5	888928339...5	D	1	10 10
Lenght mm	60 (knob 30+30)		888930307...5	888930309...5	D	1	10 10
Lenght mm	65 (knob 30+35)		888930357...5	888930359...5	D	1	10 10
Lenght mm	70 (knob 30+40)		888930407...5	888930409...5	D	1	10 10
Lenght mm	75 (knob 30+45)		888930457...5	888930459...5	D	1	10 10
Lenght mm	80 (knob 30+50)		888930507...5	888930509...5	D	1	10 10
Lenght mm	85 (knob 30+55)		888930557...5	888930559...5	D	1	10 10
Lenght mm	90 (knob 30+60)		888930607...5	888930609...5	D	1	10 10
Lenght mm	95 (knob 30+65)		888930657...5	888930659...5	D	1	- 1
Lenght mm	100 (knob 30+70)		888930707...5	888930709...5	D	1	- 1
Lenght mm	105 (knob 30+75)		888930757...5	888930759...5	D	1	- 1
Lenght mm	110 (knob 30+80)		888930807...5	888930809...5	D	1	- 1
Lenght mm	115 (knob 30+85)		888930857...5	888930859...5	D	1	- 1
Lenght mm	120 (knob 30+90)		888930907...5	888930909...5	D	1	- 1
Lenght mm	70 (knob 35+35)		888935357...5	888935359...5	D	1	10 10
Lenght mm	75 (knob 35+40)		888935407...5	888935409...5	D	1	10 10
Lenght mm	80 (knob 35+45)		888935457...5	888935459...5	D	1	10 10
Lenght mm	85 (knob 35+50)		888935507...5	888935509...5	D	1	10 10
Lenght mm	90 (knob 35+55)		888935557...5	888935559...5	D	1	10 10
Lenght mm	95 (knob 35+60)		888935607...5	888935609...5	D	1	- 1
Lenght mm	100 (knob 35+65)		888935657...5	888935659...5	D	1	- 1
Lenght mm	105 (knob 35+70)		888935707...5	888935709...5	D	1	- 1
Lenght mm	110 (knob 35+75)		888935757...5	888935759...5	D	1	- 1
Lenght mm	115 (knob 35+80)		888935807...5	888935809...5	D	1	- 1



R6

		Code		Status	Single package	Multiple package	Min. ord.
							
L	C + D	BRASS	NICKEL				
Lenght mm 120 (knob 35+85)		888935857...5	888935859...5	D	1	-	1
Lenght mm 125 (knob 35+90)		888935907...5	888935909...5	D	1	-	1
Lenght mm 80 (knob 40+40)		888940407...5	888940409...5	D	1	10	10
Lenght mm 85 (knob 40+45)		888940457...5	888940459...5	D	1	10	10
Lenght mm 90 (knob 40+50)		888940507...5	888940509...5	D	1	10	10
Lenght mm 95 (knob 40+55)		888940557...5	888940559...5	D	1	-	1
Lenght mm 100 (knob 40+60)		888940607...5	888940609...5	D	1	-	1
Lenght mm 105 (knob 40+65)		888940657...5	888940659...5	D	1	-	1
Lenght mm 110 (knob 40+70)		888940707...5	888940709...5	D	1	-	1
Lenght mm 115 (knob 40+75)		888940757...5	888940759...5	D	1	-	1
Lenght mm 120 (knob 40+80)		888940807...5	888940809...5	D	1	-	1
Lenght mm 125 (knob 40+85)		888940857...5	888940859...5	D	1	-	1
Lenght mm 130 (knob 40+90)		888940907...5	888940909...5	D	1	-	1
Lenght mm 90 (knob 45+45)		888945457...5	888945459...5	D	1	10	10
Lenght mm 95 (knob 45+50)		888945507...5	888945509...5	D	1	-	1
Lenght mm 100 (knob 45+55)		888945557...5	888945559...5	D	1	-	1
Lenght mm 105 (knob 45+60)		888945607...5	888945609...5	D	1	-	1
Lenght mm 110 (knob 45+65)		888945657...5	888945659...5	D	1	-	1
Lenght mm 115 (knob 45+70)		888945707...5	888945709...5	D	1	-	1
Lenght mm 120 (knob 45+75)		888945757...5	888945759...5	D	1	-	1
Lenght mm 125 (knob 45+80)		888945807...5	888945809...5	D	1	-	1
Lenght mm 130 (knob 45+85)		888945857...5	888945859...5	D	1	-	1
Lenght mm 100 (knob 50+50)		888950507...5	888950509...5	D	1	-	1
Lenght mm 105 (knob 50+55)		888950557...5	888950559...5	D	1	-	1
Lenght mm 110 (knob 50+60)		888950607...5	888950609...5	D	1	-	1
Lenght mm 115 (knob 50+65)		888950657...5	888950659...5	D	1	-	1
Lenght mm 120 (knob 50+70)		888950707...5	888950709...5	D	1	-	1
Lenght mm 125 (knob 50+75)		888950757...5	888950759...5	D	1	-	1
Lenght mm 130 (knob 50+80)		888950807...5	888950809...5	D	1	-	1
Lenght mm 110 (knob 55+55)		888955557...5	888955559...5	D	1	-	1
Lenght mm 115 (knob 55+60)		888955607...5	888955609...5	D	1	-	1
Lenght mm 120 (knob 55+65)		888955657...5	888955659...5	D	1	-	1
Lenght mm 125 (knob 55+70)		888955707...5	888955709...5	D	1	-	1
Lenght mm 130 (knob 55+75)		888955757...5	888955759...5	D	1	-	1
Lenght mm 120 (knob 60+60)		888960607...5	888960609...5	D	1	-	1
Lenght mm 125 (knob 60+65)		888960657...5	888960659...5	D	1	-	1
Lenght mm 130 (knob 60+70)		888960707...5	888960709...5	D	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.

R6

R6 **EUROPEAN PROFILE** cylinder with internal **FLAT KNOB** and nickel-plated brass flat key with 6 pins external. Antidrill pin inside the cylinder body. DIN 30 projecting cam.

3 KEYS. 65 mm screw. (key blank code: 020809).

L C + D

Lenght mm 56 (Knob 28+28)

Lenght mm 61 (Knob 28+33)

Lenght mm 60 (Knob 30+30)

Lenght mm 65 (Knob 30+35)

Lenght mm 70 (Knob 30+40)

Lenght mm 75 (Knob 30+45)

Lenght mm 90 (Knob 30+60)

Lenght mm 61 (Knob 33+28)

Lenght mm 65 (Knob 35+30)

Lenght mm 70 (Knob 35+35)

Lenght mm 80 (Knob 35+45)

Lenght mm 70 (Knob 40+30)

Lenght mm 80 (Knob 40+40)

Lenght mm 90 (Knob 40+50)

Lenght mm 75 (Knob 45+30)

Lenght mm 80 (Knob 45+35)

Lenght mm 90 (Knob 45+45)

Lenght mm 90 (Knob 50+40)

Lenght mm 105 (Knob 50+55)

Lenght mm 110 (Knob 50+60)

Lenght mm 90 (Knob 60+30)

Lenght mm 100 (Knob 60+40)

Lenght mm 105 (Knob 60+45)

Lenght mm 110 (Knob 60+50)

Lenght mm 120 (Knob 65+55)

Lenght mm 110 (Knob 80+30)

BRASS

NICKEL

885928287

885928289

D

1

10

10

885928337

885928339

D

1

10

10

885930307

885930309

B

1

10

10

885930357

885930359

D

1

10

10

885930407

885930409

C

1

10

10

885930457

885930459

C

1

10

10

885930607

885930609

C

1

10

10

885933287

885933289

D

1

10

10

885935307

885935309

B

1

10

10

885935357

885935359

B

1

10

10

885935457

885935459

D

1

10

10

885940307

885940309

C

1

10

10

885940407

885940409

B

1

10

10

885940507

885940509

C

1

10

10

885945307

885945309

D

1

10

10

885945357

885945359

C

1

10

10

885945457

885945459

C

1

10

10

885950407

885950409

C

1

10

10

885950557

885950559

D

1

-

1

885950607

885950609

D

1

-

1

885960307

885960309

D

1

10

10

885960407

885960409

C

1

-

1

885960457

885960459

D

1

-

1

885960507

885960509

D

1

-

1

885965557

885965559

D

1

-

1

885980307


885980309

D

1

-

1

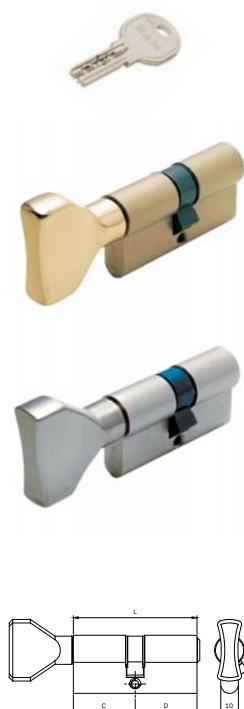


Code
Status
Single
package
Multiple
package
Min. ord.


R6

R6 **EUROPEAN PROFILE** cylinder with internal **FLAT KNOB** and nickel-plated brass flat key with 6 pins external. Antidrill pin inside the cylinder body. DIN 30 projecting cam.

5 KEYS. 65 mm screw. (key blank code: 020809).

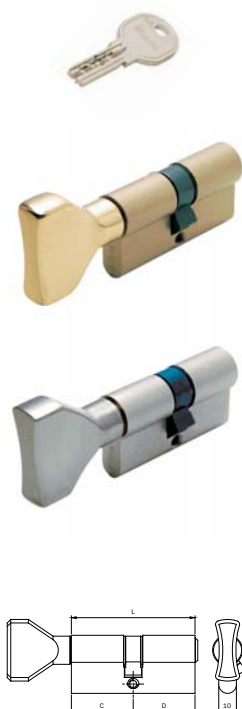

	L	C + D					
			BRASS	NICKEL			
Lenght mm 56 (Knob 28+28)			885928287..5	885928289..5	D	1	10 10
Lenght mm 61 (Knob 28+33)			885928337..5	885928339..5	D	1	10 10
Lenght mm 60 (Knob 30+30)			885930307..5	885930309..5	B	1	10 10
Lenght mm 65 (Knob 30+35)			885930357..5	885930359..5	C	1	10 10
Lenght mm 70 (Knob 30+40)			885930407..5	885930409..5	C	1	10 10
Lenght mm 75 (Knob 30+45)			885930457..5	885930459..5	C	1	10 10
Lenght mm 90 (Knob 30+60)			885930607..5	885930609..5	C	1	10 10
Lenght mm 61 (Knob 33+28)			885933287..5	885933289..5	D	1	10 10
Lenght mm 65 (Knob 35+30)			885935307..5	885935309..5	C	1	10 10
Lenght mm 70 (Knob 35+35)			885935357..5	885935359..5	B	1	10 10
Lenght mm 80 (Knob 35+45)			885935457..5	885935459..5	C	1	10 10
Lenght mm 70 (Knob 40+30)			885940307..5	885940309..5	B	1	10 10
Lenght mm 80 (Knob 40+40)			885940407..5	885940409..5	C	1	10 10
Lenght mm 90 (Knob 40+50)			885940507..5	885940509..5	B	1	10 10
Lenght mm 75 (Knob 45+30)			885945307..5	885945309..5	C	1	10 10
Lenght mm 80 (Knob 45+35)			885945357..5	885945359..5	C	1	10 10
Lenght mm 90 (Knob 45+45)			885945457..5	885945459..5	B	1	10 10
Lenght mm 90 (Knob 50+40)			885950407..5	885950409..5	C	1	10 10
Lenght mm 105 (Knob 50+55)			885950557..5	885950559..5	D	1	- 1
Lenght mm 110 (Knob 50+60)			885950607..5	885950609..5	D	1	- 1
Lenght mm 90 (Knob 60+30)			885960307..5	885960309..5	D	1	10 10
Lenght mm 100 (Knob 60+40)			885960407..5	885960409..5	D	1	- 1
Lenght mm 105 (Knob 60+45)			885960457..5	885960459..5	D	1	- 1
Lenght mm 110 (Knob 60+50)			885960507..5	885960509..5	D	1	- 1
Lenght mm 120 (Knob 65+55)			885965557..5	885965559..5	D	1	- 1
Lenght mm 110 (Knob 80+30)			885980307..5	885980309..5	D	1	- 1

R6

R6 **EUROPEAN PROFILE** cylinder with internal **FLAT KNOB** and nickel-plated brass flat key with 6 pins external. Antidrill pin inside the cylinder body. DIN 30 projecting cam.

3 KEYS. 65 mm screw. (key blank code: 020809).

L C + D

Lenght mm 60 (Knob 30+30) **24 KT. GOLD-PLATED BRASS**

Lenght mm 70 (Knob 35+35) **24 KT. GOLD-PLATED BRASS**



Code

Min. ord	
Multiple package	
Single package	
Status	

Min. ord.

88593030A

D	1	10	10
---	---	----	----

D	1	10	10
---	---	----	----

L	C + D
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

Lenght mm 60 (Knob 30+30) **ANTIQUE BRONZED BRASS**

Lenght mm 70 (Knob 35+35) **ANTIQUE BRONZED BRASS**



88593030B

D	1	10	10
---	---	----	----

D	1	10	10
---	---	----	----

L C + D

Lenght mm 60 (Knob 30+30) **POLISHED CHROME-PLATED BRASS**

Lenght mm 70 (Knob 35+35) **POLISHED CHROME-PLATED BRASS**



88593030K

D	1	10	10
---	---	----	----

D	1	10	10
---	---	----	----

L C + D

Lenght mm 60 (Knob 30+30) **POLISHED AND LACQUERED BRASS**

Lenght mm 70 (Knob 35+35) **POLISHED AND LACQUERED BRASS**



88593030L

D	1	10	10
---	---	----	----

D	1	10	10
---	---	----	----

$$L \quad C + D$$

Lenght mm 60 (Knob 30+30) **SATIN NICKEL-PLATED BRASS**

Lenght mm 70 (Knob 35+35) **SATIN NICKEL-PLATED BRASS**



88593030N

D	1	10	10
---	---	----	----


D	1	10	10
---	---	----	----

Code
Status
Single
package
Multiple
package
Min. ord.

R6

R6 **EUROPEAN PROFILE** cylinder with **D8X16 SHAFT** preset for internal flat knob and nickel-plated brass flat key with 6 pins external. Antidrill pin inside the cylinder body. DIN 30 projecting cam.

3 KEYS. 65 mm screw. (key blank code: 020809).




L	C + D	BRASS	NICKEL				
Lenght mm 56 (Knob 28+28)		886928287	886928289	D	1	10	10
Lenght mm 61 (Knob 28+33)		886928337	886928339	D	1	10	10
Lenght mm 60 (Knob 30+30)		886930307	886930309	C	1	10	10
Lenght mm 65 (Knob 30+35)		886930357	886930359	D	1	10	10
Lenght mm 70 (Knob 30+40)		886930407	886930409	D	1	10	10
Lenght mm 75 (Knob 30+45)		886930457	886930459	D	1	10	10
Lenght mm 90 (Knob 30+60)		886930607	886930609	D	1	10	10
Lenght mm 61 (Knob 33+28)		886933287	886933289	D	1	10	10
Lenght mm 65 (Knob 35+30)		886935307	886935309	D	1	10	10
Lenght mm 70 (Knob 35+35)		886935357	886935359	B	1	10	10
Lenght mm 80 (Knob 35+45)		886935457	886935459	D	1	10	10
Lenght mm 70 (Knob 40+30)		886940307	886940309	D	1	10	10
Lenght mm 80 (Knob 40+40)		886940407	886940409	B	1	10	10
Lenght mm 90 (Knob 40+50)		886940507	886940509	D	1	10	10
Lenght mm 75 (Knob 45+30)		886945307	886945309	D	1	10	10
Lenght mm 80 (Knob 45+35)		886945357	886945359	C	1	10	10
Lenght mm 90 (Knob 45+45)		886945457	886945459	C	1	10	10
Lenght mm 90 (Knob 50+40)		886950407	886950409	D	1	10	10
Lenght mm 105 (Knob 50+55)		886950557	886950559	D	1	-	1
Lenght mm 110 (Knob 50+60)		886950607	886950609	D	1	-	1
Lenght mm 90 (Knob 60+30)		886960307	886960309	D	1	10	10
Lenght mm 100 (Knob 60+40)		886960407	886960409	D	1	-	1
Lenght mm 105 (Knob 60+45)		886960457	886960459	D	1	-	1
Lenght mm 110 (Knob 60+50)		886960507	886960509	D	1	-	1
Lenght mm 120 (Knob 65+55)		886965557	886965559	D	1	-	1
Lenght mm 110 (Knob 80+30)		886980307	886980309	D	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.

R6

R6 **EUROPEAN PROFILE** cylinder with **D8X16 SHAFT** preset for internal flat knob and nickel-plated brass flat key with 6 pins external. Antidrill pin inside the cylinder body. DIN 30 projecting cam. **5 KEYS**. 65 mm screw. (key blank code: 020809).



	L	C + D					
			BRASS	NICKEL			
Lenght mm 56 (Knob 28+28)			886928287..5	886928289..5	D	1	10 10
Lenght mm 61 (Knob 28+33)			886928337..5	886928339..5	D	1	10 10
Lenght mm 60 (Knob 30+30)			886930307..5	886930309..5	B	1	10 10
Lenght mm 65 (Knob 30+35)			886930357..5	886930359..5	D	1	10 10
Lenght mm 70 (Knob 30+40)			886930407..5	886930409..5	D	1	10 10
Lenght mm 75 (Knob 30+45)			886930457..5	886930459..5	D	1	10 10
Lenght mm 90 (Knob 30+60)			886930607..5	886930609..5	D	1	10 10
Lenght mm 61 (Knob 33+28)			886933287..5	886933289..5	D	1	10 10
Lenght mm 65 (Knob 35+30)			886935307..5	886935309..5	D	1	10 10
Lenght mm 70 (Knob 35+35)			886935357..5	886935359..5	B	1	10 10
Lenght mm 80 (Knob 35+45)			886935457..5	886935459..5	D	1	10 10
Lenght mm 70 (Knob 40+30)			886940307..5	886940309..5	D	1	10 10
Lenght mm 80 (Knob 40+40)			886940407..5	886940409..5	C	1	10 10
Lenght mm 90 (Knob 40+50)			886940507..5	886940509..5	D	1	10 10
Lenght mm 75 (Knob 45+30)			886945307..5	886945309..5	D	1	10 10
Lenght mm 80 (Knob 45+35)			886945357..5	886945359..5	D	1	10 10
Lenght mm 90 (Knob 45+45)			886945457..5	886945459..5	D	1	10 10
Lenght mm 90 (Knob 50+40)			886950407..5	886950409..5	D	1	10 10
Lenght mm 105 (Knob 50+55)			886950557..5	886950559..5	D	1	- 1
Lenght mm 110 (Knob 50+60)			886950607..5	886950609..5	D	1	- 1
Lenght mm 90 (Knob 60+30)			886960307..5	886960309..5	D	1	10 10
Lenght mm 100 (Knob 60+40)			886960407..5	886960409..5	D	1	- 1
Lenght mm 105 (Knob 60+45)			886960457..5	886960459..5	D	1	- 1
Lenght mm 110 (Knob 60+50)			886960507..5	886960509..5	D	1	- 1
Lenght mm 120 (Knob 65+55)			886965557..5	886965559..5	D	1	- 1
Lenght mm 110 (Knob 80+30)			886980307..5	886980309..5	D	1	- 1

Code
Status
Single
package
Multiple
package
Min. ord.

R6



R6 **EUROPEAN PROFILE** cylinder with **D8X75 SHAFT** preset for internal flat knob and nickel-plated brass flat key with 6 pins external. Antidrill pin inside the cylinder body. DIN 30 projecting cam.

3 KEYS. 65 mm screw. (key blank code: 020809).

	L	C + D				
Body lenght mm 60 (knob 30+30)			BRASS	NICKEL		
			8869D0307	8869D0309	B	1 5 5
Body lenght mm 65 (knob 30+35)			8869D0357	8869D0359	D	1 5 5
Body lenght mm 70 (knob 30+40)			8869D0407	8869D0409	C	1 5 5
Body lenght mm 75 (knob 30+45)			8869D0457	8869D0459	C	1 5 5
Body lenght mm 80 (knob 30+50)			8869D0507	8869D0509	C	1 5 5
Body lenght mm 90 (knob 30+60)			8869D0607	8869D0609	D	1 5 5
Body lenght mm 100 (knob 30+70)			8869D0707	8869D0709	D	1 - 1



R6 **EUROPEAN PROFILE** cylinder with **D8X75 SHAFT** preset for internal flat knob and nickel-plated brass flat key with 6 pins external.

Antidrill pin inside the cylinder body. DIN 30 projecting cam. **5 KEYS.** 65 mm screw. (key blank code: 020809).

	L	C + D				
Body lenght mm 60 (knob 30+30)			BRASS	NICKEL		
			8869D0307..5	8869D0309..5	D	1 5 5
Body lenght mm 65 (knob 30+35)			8869D0357..5	8869D0359..5	D	1 5 5
Body lenght mm 70 (knob 30+40)			8869D0407..5	8869D0409..5	D	1 5 5
Body lenght mm 75 (knob 30+45)			8869D0457..5	8869D0459..5	D	1 5 5
Body lenght mm 80 (knob 30+50)			8869D0507..5	8869D0509..5	D	1 5 5
Body lenght mm 90 (knob 30+60)			8869D0607..5	8869D0609..5	D	1 5 5
Body lenght mm 100 (knob 30+70)			8869D0707..5	8869D0709..5	D	1 - 1



Code
Status
Single
package
Multiple
package
Min. ord.

R6 U.K. market



R6 **OVERSIZE SINGLE-PROFILE** oval cylinder, **U.K.** market. nickel-plated brass flat key with 6 pins.
Antidrill pin inside the cylinder body. ISEO 45° projecting cam. **3 KEYS**.
Screw mm65. (key blank code: 020809).

	BRASS	NICKEL				
L C + D						
Lenght mm 40 (30+10)	881130107	881130109	D	1	10	10
Lenght mm 45 (35+10)	881135107	881135109	D	1	10	10
Lenght mm 50 (40+10)	881140107	881140109	D	1	10	10




R6 **OVERSIZE DOUBLE-PROFILE** oval cylinder, **U.K.** market. nickel-plated brass flat key with 6 pins.
Antidrill pin inside the cylinder body. ISEO 45° projecting cam. **3 KEYS**.
Screw mm65. (key blank code: 020809).

	BRASS	NICKEL				
L C + D						
Lenght mm 60 (30+30)	881130307	881130309	D	1	10	10
Lenght mm 70 (35+35)	881135357	881135359	D	1	10	10
Lenght mm 80 (40+40)	881140407	881140409	D	1	10	10

Code
Status
Single
package
Multiple
package
Min. ord.

R6 U.K. market



R6 **OVERSIZE SINGLE-PROFILE** oval cylinder, **U.K.** Market,
with internal flat knob and nickel-plated brass flat key with 6 pins.
Antidrill pin inside the cylinder body. ISEO 45° projecting cam. **3 KEYS**.
Screw mm65. (key blank code: 020809).

	BRASS	NICKEL				
L C + D						
Lenght mm 60 (30+30)	887130307	887130309	D	1	10	10
Lenght mm 70 (35+35)	887135357	887135359	D	1	10	10
Lenght mm 80 (40+40)	887140407	887140409	D	1	10	10



R6 with microswitch




R6 **"PATENTED"** and M26 **THREADED** cylinder with signaling **MICROSWITCH**.
Nickel-plated brass flat key, 6 pins. **3 KEYS** (key blank code: 020909)
Common contact + normally open + normally closed

	NICKEL				
	855569	D	1	5	5

Code
Status
Single
package
Multiple
package
Min. ord.


R6



R6 **EXTERNAL DETACHED CYLINDER** to be applied on doors with a max. thickness of 85 mm To be used with rim locks without external cylinder. 6-pin nicked-brass flat key. Plate and screws for inside fixing.

3 KEYS. (key blank code: 020809)

brass	860000857	C	1	10	10
nickel plated brass	860000859	D	1	10	10




Pair composed of R6 **INTERNAL** cylinder to be applied to the lock and **EXTERNAL DETACHED** cylinder to be applied on doors with a max. thickness of 85 mm **To be used with main doors rim locks 4** series and electric locks 521* series latch bolt only.** 6-pin nicked-brass flat key.

Plate and screws for inside fixing. **3 KEYS.**

(key blank code: 020809). (For series 421-422-423-424-425-426-441-442-483-484-4510-5210-5213-5214)

BRASS

862100857	D	1	10	10
------------------	---	---	----	----




R6 **EXTERNAL FIXED D 26** cylinder to be applied on doors with a max. thickness of 50 mm To be used with rim locks. 6-pin nicked-brass flat key. D 26 tube and fixing screws.

3 KEYS. (keyblank code: 020809)

BRASS

862226507	C	1	10	10
------------------	---	---	----	----



Pair composed of R6 **INTERNAL** cylinder to be applied to the lock and **EXTERNAL FIXED D 26** cylinder to be applied on doors with a max. thickness of 50 mm To be used with main doors rim locks

and electric locks with latch bolt only. 6-pin nicked-brass flat key. D 26 tube and fixing screws. **3 KEYS.**

(keyblank code: 020809). (For series 431-432-435-436-437-438-450-451-452-481-482-485-486

491-492-493-494-495-496-4250-4210-4950-4910-4350-5200-5203-5204-5205-5220-5224-5250-5253-5255)

BRASS

862426507	D	1	10	10
------------------	---	---	----	----

Cylinders

F6

Min. ord.
Multiple
package
Single
package
Status
Code

F6

F6 **SINGLE-PROFILE** cylinder. Nickel-plated brass vertical key with 6 pins.
8-position DIN cam. **3 KEYS**. Screw mm 65.
(keyblank ref. N. 020609).

L C + D

Lenght mm 40 (30+10)

Lenght mm 45 (35+10)

Lenght mm 50 (40+10)

Lenght mm 55 (45+10)

Lenght mm 60 (50+10)

Lenght mm 65 (55+10)

Lenght mm 70 (60+10)

Lenght mm 75 (65+10)

Lenght mm 80 (70+10)

Lenght mm 85 (75+10)

Lenght mm 90 (80+10)

Lenght mm 95 (85+10)



BRASS

NICKEL

810930107

810930109

C

1

10

10

810935107

810935109

C

1

10

10

810940107

810940109

D

1

10

10

810945107

810945109

D

1

10

10

810950107

810950109

D

1

10

10

810955107

810955109

D

1

10

10

810960107

810960109

D

1

10

10

810965107

810965109

D

1

10

10

810970107

810970109

D

1

10

10

810975107

810975109

D

1

10

10

810980107

810980109

D

1

10

10

810985107


810985109

D

1

-

1



Min. ord.
Multiple
package
Single
package
Status
Code

F6

F6 **DOUBLE-PROFILE** cylinder. Nickel-plated brass vertical key with 6 pins.
Projecting DIN 30° cam. **3 KEYS**. Screw mm 65.
(keyblank ref. N. 020609)

L C + D


Lenght mm 56 (28+28)
Lenght mm 61 (28+33)
Lenght mm 60 (30+30)
Lenght mm 65 (30+35)
Lenght mm 70 (30+40)
Lenght mm 75 (30+45)
Lenght mm 80 (30+50)
Lenght mm 85 (30+55)
Lenght mm 90 (30+60)
Lenght mm 95 (30+65)
Lenght mm 100 (30+70)
Lenght mm 105 (30+75)
Lenght mm 110 (30+80)
Lenght mm 115 (30+85)
Lenght mm 120 (30+90)
Lenght mm 70 (35+35)
Lenght mm 75 (35+40)
Lenght mm 80 (35+45)
Lenght mm 85 (35+50)
Lenght mm 90 (35+55)
Lenght mm 95 (35+60)
Lenght mm 100 (35+65)
Lenght mm 105 (35+70)
Lenght mm 110 (35+75)
Lenght mm 115 (35+80)
Lenght mm 120 (35+85)
Lenght mm 125 (35+90)
Lenght mm 80 (40+40)
Lenght mm 85 (40+45)
Lenght mm 90 (40+50)
Lenght mm 95 (40+55)
Lenght mm 100 (40+60)
Lenght mm 105 (40+65)
Lenght mm 110 (40+70)
Lenght mm 115 (40+75)
Lenght mm 120 (40+80)
Lenght mm 125 (40+85)
Lenght mm 130 (40+90)
Lenght mm 90 (45+45)
Lenght mm 95 (45+50)
Lenght mm 100 (45+55)
Lenght mm 105 (45+60)
Lenght mm 110 (45+65)
Lenght mm 115 (45+70)
Lenght mm 120 (45+75)
Lenght mm 125 (45+80)



BRASS

NICKEL

BRASS	NICKEL	D	1	10	10
810928287	810928289	D	1	10	10
810928337	810928339	D	1	10	10
810930307	810930309	C	1	10	10
810930357	810930359	D	1	10	10
810930407	810930409	D	1	10	10
810930457	810930459	D	1	10	10
810930507	810930509	D	1	10	10
810930557	810930559	D	1	10	10
810930607	810930609	D	1	10	10
810930657	810930659	D	1	-	1
810930707	810930709	D	1	-	1
810930757	810930759	D	1	-	1
810930807	810930809	D	1	-	1
810930857	810930859	D	1	-	1
810930907	810930909	D	1	-	10
810935357	810935359	C	1	10	10
810935407	810935409	D	1	10	10
810935457	810935459	D	1	10	10
810935507	810935509	D	1	10	10
810935557	810935559	D	1	10	10
810935607	810935609	D	1	-	1
810935657	810935659	D	1	-	1
810935707	810935709	D	1	-	1
810935757	810935759	D	1	-	1
810935807	810935809	D	1	-	1
810935857	810935859	D	1	-	1
810935907	810935909	D	1	-	1
810940407	810940409	C	1	10	10
810940457	810940459	D	1	10	10
810940507	810940509	D	1	10	10
810940557	810940559	D	1	-	1
810940607	810940609	D	1	-	1
810940657	810940659	C	1	-	1
810940707	810940709	D	1	-	1
810940757	810940759	D	1	-	1
810940807	810940809	D	1	-	1
810940857	810940859	D	1	-	1
810940907	810940909	D	1	-	1
810945457	810945459	D	1	10	10
810945507	810945509	D	1	-	1
810945557	810945559	D	1	-	1
810945607	810945609	D	1	-	1
810945657	810945659	D	1	-	1
810945707	810945709	D	1	-	1
810945757	810945759	D	1	-	1
810945807	810945809	D	1	-	1




Min. ord.
Multiple
package
Single
package
Status
Code

F6

						
L C + D		BRASS	NICKEL			
Lenght mm 130 (45+85)		810945857	810945859	D	1	- 1
Lenght mm 100 (50+50)		810950507	810950509	D	1	- 1
Lenght mm 105 (50+55)		810950557	810950559	D	1	- 1
Lenght mm 110 (50+60)		810950607	810950609	D	1	- 1
Lenght mm 115 (50+65)		810950657	810950659	D	1	- 1
Lenght mm 120 (50+70)		810950707	810950709	D	1	- 1
Lenght mm 125 (50+75)		810950757	810950759	D	1	- 1
Lenght mm 130 (50+80)		810950807	810950809	D	1	- 1
Lenght mm 110 (55+55)		810955557	810955559	D	1	- 1
Lenght mm 115 (55+60)		810955607	810955609	D	1	- 1
Lenght mm 120 (55+65)		810955657	810955659	D	1	- 1
Lenght mm 125 (55+70)		810955707	810955709	D	1	- 1
Lenght mm 130 (55+75)		810955757	810955759	D	1	- 1
Lenght mm 120 (60+60)		810960607	810960609	D	1	- 1
Lenght mm 125 (60+65)		810960657	810960659	D	1	- 1
Lenght mm 130 (60+70)		810960707	810960709	D	1	- 1

Min. ord.
Multiple
package
Single
package
Status
Code

F6

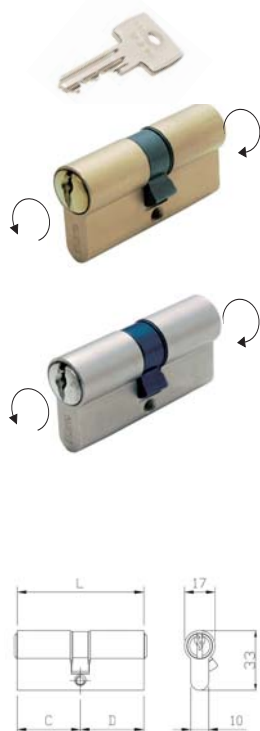

F6 **DOUBLE-PROFILE** cylinder. Nickel-plated brass vertical key with 6 pins.

DOUBLE FUNCTION, also operating when keyed-in.

Projecting DIN 30° cam. **3 KEYS**. Screw mm 65. (keyblank ref. N. 020609)



L C + D		BRASS	NICKEL				
Lenght mm 60 (30+30)		819930307	819930309	D	1	10	10
Lenght mm 65 (30+35)		819930357	819930359	D	1	10	10
Lenght mm 70 (30+40)		819930407	819930409	D	1	10	10
Lenght mm 75 (30+45)		819930457	819930459	D	1	10	10
Lenght mm 80 (30+50)		819930507	819930509	D	1	10	10
Lenght mm 85 (30+55)		819930557	819930559	D	1	10	10
Lenght mm 90 (30+60)		819930607	819930609	D	1	10	10
Lenght mm 95 (30+65)		819930657	819930659	D	1	-	1
Lenght mm 100 (30+70)		819930707	819930709	D	1	-	1
Lenght mm 105 (30+75)		819930757	819930759	D	1	-	1
Lenght mm 110 (30+80)		819930807	819930809	D	1	-	1
Lenght mm 115 (30+85)		819930857	819930859	D	1	-	1
Lenght mm 120 (30+90)		819930907	819930909	D	1	-	1
Lenght mm 70 (35+35)		819935357	819935359	D	1	10	10
Lenght mm 75 (35+40)		819935407	819935409	D	1	10	10
Lenght mm 80 (35+45)		819935457	819935459	D	1	10	10
Lenght mm 85 (35+50)		819935507	819935509	D	1	10	10
Lenght mm 90 (35+55)		819935557	819935559	D	1	10	10
Lenght mm 95 (35+60)		819935607	819935609	D	1	-	1
Lenght mm 100 (35+65)		819935657	819935659	D	1	-	1
Lenght mm 105 (35+70)		819935707	819935709	D	1	-	1
Lenght mm 110 (35+75)		819935757	819935759	D	1	-	1
Lenght mm 115 (35+80)		819935807	819935809	D	1	-	1
Lenght mm 120 (35+85)		819935857	819935859	D	1	-	1
Lenght mm 125 (35+90)		819935907	819935909	D	1	-	1
Lenght mm 80 (40+40)		819940407	819940409	D	1	10	10
Lenght mm 85 (40+45)		819940457	819940459	D	1	10	10
Lenght mm 90 (40+50)		819940507	819940509	D	1	10	10
Lenght mm 95 (40+55)		819940557	819940559	D	1	-	1
Lenght mm 100 (40+60)		819940607	819940609	D	1	-	1
Lenght mm 105 (40+65)		819940657	819940659	D	1	-	1
Lenght mm 110 (40+70)		819940707	819940709	D	1	-	1
Lenght mm 115 (40+75)		819940757	819940759	D	1	-	1
Lenght mm 120 (40+80)		819940807	819940809	D	1	-	1
Lenght mm 125 (40+85)		819940857	819940859	D	1	-	1
Lenght mm 130 (40+90)		819940907	819940909	D	1	-	1
Lenght mm 90 (45+45)		819945457	819945459	D	1	10	10
Lenght mm 95 (45+50)		819945507	819945509	D	1	-	1
Lenght mm 100 (45+55)		819945557	819945559	D	1	-	1
Lenght mm 105 (45+60)		819945607	819945609	D	1	-	1
Lenght mm 110 (45+65)		819945657	819945659	D	1	-	1
Lenght mm 115 (45+70)		819945707	819945709	D	1	-	1
Lenght mm 120 (45+75)		819945757	819945759	D	1	-	1

Min. ord.
Multiple
package
Single
package
Status
Code

F6

						
L C + D		BRASS	NICKEL			
Lenght mm 125 (45+80)		819945807	819945809	D	1	- 1
Lenght mm 130 (45+85)		819945857	819945859	D	1	- 1
Lenght mm 100 (50+50)		819950507	819950509	D	1	- 1
Lenght mm 105 (50+55)		819950557	819950559	D	1	- 1
Lenght mm 110 (50+60)		819950607	819950609	D	1	- 1
Lenght mm 115 (50+65)		819950657	819950659	D	1	- 1
Lenght mm 120 (50+70)		819950707	819950709	D	1	- 1
Lenght mm 125 (50+75)		819950757	819950759	D	1	- 1
Lenght mm 130 (50+80)		819950807	819950809	D	1	- 1
Lenght mm 110 (55+55)		819955557	819955559	D	1	- 1
Lenght mm 115 (55+60)		819955607	819955609	D	1	- 1
Lenght mm 120 (55+65)		819955657	819955659	D	1	- 1
Lenght mm 125 (55+70)		819955707	819955709	D	1	- 1
Lenght mm 130 (55+75)		819955757	819955759	D	1	- 1
Lenght mm 120 (60+60)		819960607	819960609	D	1	- 1
Lenght mm 125 (60+65)		819960657	819960659	D	1	- 1
Lenght mm 130 (60+70)		819960707	819960709	D	1	- 1

Min. ord.
Multiple
package
Single
package
Status
Code

F6

F6 **EUROPEAN-PROFILE** cylinder with internal round knob and nickel-plated brass vertical key with 6 pins. Projecting DIN 30° cam. **3 KEYS**. Screw mm 65.
(keyblank ref. N. 020609)



L	C + D	BRASS	NICKEL				
Lenght mm 56 (knob 28+28)		818928287	818928289	D	1	10	10
Lenght mm 61 (knob 28+33)		818928337	818928339	D	1	10	10
Lenght mm 60 (knob 30+30)		818930307	818930309	C	1	10	10
Lenght mm 65 (knob 30+35)		818930357	818930359	D	1	10	10
Lenght mm 70 (knob 30+40)		818930407	818930409	D	1	10	10
Lenght mm 75 (knob 30+45)		818930457	818930459	D	1	10	10
Lenght mm 80 (knob 30+50)		818930507	818930509	D	1	10	10
Lenght mm 85 (knob 30+55)		818930557	818930559	D	1	10	10
Lenght mm 90 (knob 30+60)		818930607	818930609	D	1	10	10
Lenght mm 95 (knob 30+65)		818930657	818930659	C	1	-	1
Lenght mm 70 (knob 35+35)		818935357	818935359	D	1	10	10
Lenght mm 75 (knob 35+40)		818935407	818935409	D	1	10	10
Lenght mm 80 (knob 35+45)		818935457	818935459	D	1	10	10
Lenght mm 85 (knob 35+50)		818935507	818935509	D	1	10	10
Lenght mm 90 (knob 35+55)		818935557	818935559	D	1	10	10
Lenght mm 95 (knob 35+60)		818935607	818935609	D	1	-	1
Lenght mm 100 (knob 35+65)		818935657	818935659	D	1	-	1
Lenght mm 80 (knob 40+40)		818940407	818940409	D	1	10	10
Lenght mm 85 (knob 40+45)		818940457	818940459	D	1	10	10
Lenght mm 90 (knob 40+50)		818940507	818940509	D	1	10	10
Lenght mm 95 (knob 40+55)		818940557	818940559	D	1	-	1
Lenght mm 100 (knob 40+60)		818940607	818940609	D	1	-	1
Lenght mm 105 (knob 40+65)		818940657	818940659	D	1	-	1
Lenght mm 90 (knob 45+45)		818945457	818945459	D	1	10	10
Lenght mm 95 (knob 45+50)		818945507	818945509	D	1	-	1
Lenght mm 100 (knob 45+55)		818945557	818945559	D	1	-	1
Lenght mm 105 (knob 45+60)		818945607	818945609	D	1	-	1
Lenght mm 110 (knob 45+65)		818945657	818945659	D	1	-	1
Lenght mm 100 (knob 50+50)		818950507	818950509	D	1	-	1
Lenght mm 105 (knob 50+55)		818950557	818950559	D	1	-	1
Lenght mm 110 (knob 50+60)		818950607	818950609	D	1	-	1
Lenght mm 115 (knob 50+65)		818950657	818950659	D	1	-	1
Lenght mm 110 (knob 55+55)		818955557	818955559	D	1	-	1
Lenght mm 115 (knob 55+60)		818955607	818955609	D	1	-	1
Lenght mm 120 (knob 55+65)		818955657	818955659	D	1	-	1
Lenght mm 120 (knob 60+60)		818960607	818960609	D	1	-	1
Lenght mm 125 (knob 60+65)		818960657	818960659	D	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.


F6

F6 **EUROPEAN-PROFILE** cylinder with **SHAFT D8 X 75** preset for internal knob and nickel-plated brass
vertical key with 6 pins. Projecting DIN 30° cam. **3 KEYS**. Screw mm 65.
(keyblank ref. N. 020609)



L C + D

	BRASS	NICKEL				
Body length mm 60 (knob 30+30)	8169D0307	8169D0309	D	1	10	10
Body length mm 65 (knob 30+35)	8169D0357	8169D0359	D	1	10	10
Body length mm 70 (knob 30+40)	8169D0407	8169D0409	D	1	10	10
Body length mm 75 (knob 30+45)	8169D0457	8169D0459	D	1	10	10
Body length mm 80 (knob 30+50)	8169D0507	8169D0509	D	1	10	10
Body length mm 85 (knob 30+55)	8169D0557	8169D0559	D	1	10	10
Body length mm 90 (knob 30+60)	8169D0607	8169D0609	D	1	10	10
Body length mm 95 (knob 30+65)	8169D0657	8169D0659	D	1	-	1



Cylinders

F5

Code
Status
Single
package
Multiple
package
Min. ord.

F5

F5 **DOUBLE-PROFILE** cylinder, 5-pin big key. DIN straight cam.
3 KEYS (key blank code: 020259). Screw mm 65.

L C + D

Lenght mm 42 (21+21) 3-pin big key 020239

Lenght mm 50 (25+25) 4-pin big key 020249

Lenght mm 55 (25+30) 4-pin big key 020249

Lenght mm 56 (28+28)

Lenght mm 61 (28+33)

Lenght mm 60 (30+30)

Lenght mm 65 (30+35)

Lenght mm 70 (30+40)

Lenght mm 75 (30+45)

Lenght mm 80 (30+50)

Lenght mm 85 (30+55)

Lenght mm 90 (30+60)

Lenght mm 95 (30+65)

Lenght mm 100 (30+70)

Lenght mm 105 (30+75)

Lenght mm 110 (30+80)

Lenght mm 70 (35+35)

Lenght mm 75 (35+40)

Lenght mm 80 (35+45)

Lenght mm 85 (35+50)

Lenght mm 100 (35+65)

Lenght mm 80 (40+40)

Lenght mm 85 (40+45)

Lenght mm 90 (40+50)

Lenght mm 95 (40+55)

Lenght mm 100 (40+60)

Lenght mm 90 (45+45)

Lenght mm 100 (50+50)

Lenght mm 105 (50+55)

Lenght mm 110 (50+60)

Lenght mm 120 (65+55)



BRASS

820821217 D 1 10 10

820825257 D 1 10 10

820825307 D 1 10 10

820828287 B 1 10 10

820828337 B 1 10 10

820830307 A 1 10 10

820830357 C 1 10 10

820830407 B 1 10 10

820830457 D 1 10 10

820830507 B 1 10 10

820830557 D 1 10 10

820830607 C 1 10 10

820830657 D 1 - 1

820830707 D 1 - 1

820830757 D 1 - 1

820830807 D 1 - 1

820835357 B 1 10 10

820835407 C 1 10 10

820835457 B 1 10 10

820835507 D 1 10 10

820835657 D 1 - 1

820840407 B 1 10 10

820840457 D 1 10 10

820840507 B 1 10 10

820840557 B 1 - 1

820840607 D 1 - 1


820845457 C 1 10 10

820850507 C 1 - 1

820850557 D 1 - 1

820850607 D 1 - 1

820865557 D 1 - 1



Code
Status
Single
package
Multiple
package
Min. ord.

F5

F5 **DOUBLE-PROFILE** cylinder, 5-pin big key. DIN straight cam.
3 KEYS (key blank code: 020259). Screw mm 65.

L C + D



NICKEL

Lenght mm 42 (21+21) 3-pin big key 020239

820821219 B 1 10 10

Lenght mm 50 (25+25) 4-pin big key 020249

820825259 C 1 10 10

Lenght mm 55 (25+30) 4-pin big key 020249

820825309 D 1 10 10

Lenght mm 56 (28+28)

820828289 B 1 10 10

Lenght mm 61 (28+33)

820828339 B 1 10 10

Lenght mm 60 (30+30)

820830309 A 1 10 10

Lenght mm 65 (30+35)

820830359 B 1 10 10

Lenght mm 70 (30+40)

820830409 A 1 10 10

Lenght mm 75 (30+45)

820830459 B 1 10 10

Lenght mm 80 (30+50)

820830509 B 1 10 10

Lenght mm 85 (30+55)

820830559 B 1 10 10

Lenght mm 90 (30+60)

820830609 B 1 10 10

Lenght mm 95 (30+65)

820830659 D 1 - 1

Lenght mm 100 (30+70)

820830709 C 1 - 1

Lenght mm 105 (30+75)

820830759 D 1 - 1

Lenght mm 110 (30+80)

820830809 C 1 - 1

Lenght mm 70 (35+35)

820835359 A 1 10 10

Lenght mm 75 (35+40)

820835409 D 1 10 10

Lenght mm 80 (35+45)

820835459 D 1 10 10

Lenght mm 85 (35+50)

820835509 D 1 10 10

Lenght mm 100 (35+65)

820835659 D 1 - 1

Lenght mm 80 (40+40)

820840409 B 1 10 10

Lenght mm 85 (40+45)

820840459 C 1 10 10

Lenght mm 90 (40+50)

820840509 B 1 10 10

Lenght mm 95 (40+55)

820840559 B 1 - 1

Lenght mm 100 (40+60)

820840609 C 1 - 1

Lenght mm 90 (45+45)

820845459 B 1 10 10

Lenght mm 100 (50+50)

820850509 B 1 - 1

Lenght mm 105 (50+55)

820850559 B 1 - 1

Lenght mm 110 (50+60)

820850609 C 1 - 1

Lenght mm 120 (65+55)

820865559 C 1 - 1



Code
Status
Single
package
Multiple
package
Min. ord.

F5




F5 **SINGLE-PROFILE** cylinder, 5-pin big key. DIN 30 projecting cam.
3 KEYS (key blank code: 020259). Screw mm 65.



BRASS

820925107 C 1 10 10



F5 **SINGLE-PROFILE** cylinder, 5-pin big key. 8-position DIN cam.
3 KEYS (key blank code: 020259). Screw mm 65.



BRASS

L C + D					
Lenght mm 40 (30+10)	820930107	B	1	10	10
Lenght mm 45 (35+10)	820935107	B	1	10	10
Lenght mm 50 (40+10)	820940107	B	1	10	10
Lenght mm 55 (45+10)	820945107	B	1	10	10
Lenght mm 60 (50+10)	820950107	C	1	10	10
Lenght mm 65 (55+10)	820955107	C	1	10	10
Lenght mm 70 (60+10)	820960107	D	1	10	10
Lenght mm 75 (65+10)	820965107	D	1	10	10
Lenght mm 80 (70+10)	820970107	C	1	10	10
Lenght mm 90 (80+10)	820980107	D	1	10	10
Lenght mm 100 (90+10)	820990107	D	1	-	1
Lenght mm 105 (95+10)	820995107	D	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.


F5

F5 **DOUBLE-PROFILE** cylinder, 5-pin big key. DIN 30 projecting cam.
3 KEYS (key blank code: 020259). Screw mm 65.

L C + D



BRASS



Lenght mm 42 (21+21) 3-pin big key 020239	820921217	B	1	10	10
Lenght mm 50 (25+25) 4-pin big key 020249	820925257	B	1	10	10
Lenght mm 55 (25+30) 4-pin big key 020249	820925307	B	1	10	10
Lenght mm 56 (28+28)	820928287	B	1	10	10
Lenght mm 61 (28+33)	820928337	B	1	10	10
Lenght mm 60 (30+30)	820930307	A	1	10	10
Lenght mm 65 (30+35)	820930357	B	1	10	10
Lenght mm 70 (30+40)	820930407	A	1	10	10
Lenght mm 75 (30+45)	820930457	B	1	10	10
Lenght mm 80 (30+50)	820930507	B	1	10	10
Lenght mm 85 (30+55)	820930557	C	1	10	10
Lenght mm 90 (30+60)	820930607	B	1	10	10
Lenght mm 95 (30+65)	820930657	D	1	-	1
Lenght mm 100 (30+70)	820930707	C	1	-	1
Lenght mm 105 (30+75)	820930757	C	1	-	1
Lenght mm 110 (30+80)	820930807	C	1	-	1
Lenght mm 70 (35+35)	820935357	B	1	10	10
Lenght mm 75 (35+40)	820935407	B	1	10	10
Lenght mm 80 (35+45)	820935457	B	1	10	10
Lenght mm 85 (35+50)	820935507	B	1	10	10
Lenght mm 100 (35+65)	820935657	D	1	-	1
Lenght mm 80 (40+40)	820940407	B	1	10	10
Lenght mm 85 (40+45)	820940457	C	1	10	10
Lenght mm 90 (40+50)	820940507	B	1	10	10
Lenght mm 95 (40+55)	820940557	C	1	-	1
Lenght mm 100 (40+60)	820940607	C	1	-	1
Lenght mm 90 (45+45)	820945457	B	1	10	10
Lenght mm 100 (50+50)	820950507	B	1	-	1
Lenght mm 105 (50+55)	820950557	D	1	-	1
Lenght mm 110 (50+60)	820950607	C	1	-	1
Lenght mm 120 (65+55)	820965557	C	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.

F5



F5 **SINGLE-PROFILE** cylinder, 5-pin big key.
Length mm 35 (25+10). DIN 30° projecting cam.
3 KEYS (key blank code: 020259). Screw mm 65.



NICKEL

820925109 B 1 10 10

F5 **SINGLE-PROFILE** cylinder, 5-pin big key. 8-position DIN cam.
3 KEYS (key blank code: 020259). Screw mm 65.



NICKEL

L C + D

Length mm 40 (30+10)

Length mm 45 (35+10)

Length mm 50 (40+10)

Length mm 55 (45+10)

Length mm 60 (50+10)

Length mm 65 (55+10)

Length mm 70 (60+10)

Length mm 75 (65+10)

Length mm 80 (70+10)

Length mm 90 (80+10)

Length mm 100 (90+10)

Length mm 105 (95+10)

820930109 A 1 10 10

820935109 B 1 10 10

820940109 A 1 10 10

820945109 B 1 10 10

820950109 B 1 10 10

820955109 C 1 10 10

820960109 B 1 10 10


820965109 D 1 10 10

820970109 C 1 10 10

820980109 C 1 10 10

820990109 C 1 - 1

820995109 D 1 - 1



Code
Status
Single
package
Multiple
package
Min. ord.


F5

F5 **DOUBLE-PROFILE** cylinder, 5-pin big key. DIN 30 projecting cam.
3 KEYS (key blank code: 020259). Screw mm 65.

L C + D



NICKEL



Lenght mm 42 (21+21) 3-pin big key 020239	820921219	B	1	10	10
Lenght mm 50 (25+25) 4-pin big key 020249	820925259	A	1	10	10
Lenght mm 55 (25+30) 4-pin big key 020249	820925309	B	1	10	10
Lenght mm 56 (28+28)	820928289	B	1	10	10
Lenght mm 61 (28+33)	820928339	B	1	10	10
Lenght mm 60 (30+30)	820930309	A	1	10	10
Lenght mm 65 (30+35)	820930359	A	1	10	10
Lenght mm 70 (30+40)	820930409	A	1	10	10
Lenght mm 75 (30+45)	820930459	A	1	10	10
Lenght mm 80 (30+50)	820930509	A	1	10	10
Lenght mm 85 (30+55)	820930559	A	1	10	10
Lenght mm 90 (30+60)	820930609	A	1	10	10
Lenght mm 95 (30+65)	820930659	B	1	-	1
Lenght mm 100 (30+70)	820930709	A	1	-	1
Lenght mm 105 (30+75)	820930759	B	1	-	1
Lenght mm 110 (30+80)	820930809	C	1	-	1
Lenght mm 70 (35+35)	820935359	A	1	10	10
Lenght mm 75 (35+40)	820935409	A	1	10	10
Lenght mm 80 (35+45)	820935459	A	1	10	10
Lenght mm 85 (35+50)	820935509	B	1	10	10
Lenght mm 100 (35+65)	820935659	B	1	-	1
Lenght mm 80 (40+40)	820940409	A	1	10	10
Lenght mm 85 (40+45)	820940459	A	1	10	10
Lenght mm 90 (40+50)	820940509	A	1	10	10
Lenght mm 95 (40+55)	820940559	B	1	-	1
Lenght mm 100 (40+60)	820940609	B	1	-	1
Lenght mm 90 (45+45)	820945459	A	1	10	10
Lenght mm 100 (50+50)	820950509	B	1	-	1
Lenght mm 105 (50+55)	820950559	C	1	-	1
Lenght mm 110 (50+60)	820950609	B	1	-	1
Lenght mm 120 (65+55)	820965559	C	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.

F5

F5 **SINGLE-PROFILE** cylinder, 5-pin big key. 8-position DIN cam.
3 KEYS (key blank code: 020259). Screw mm 65.



L C + D

Lenght mm 40 (30+10) **24 KT. GOLD-PLATED BRASS**

Lenght mm 45 (35+10) **24 KT. GOLD-PLATED BRASS**



82093010A D 1 10 10

82093510A D 1 10 10

L C + D

Lenght mm 40 (30+10) **ANTIQUE BRONZED BRASS**

Lenght mm 45 (35+10) **ANTIQUE BRONZED BRASS**



82093010B D 1 10 10

82093510B D 1 10 10

L C + D

Lenght mm 40 (30+10) **POLISHED CHROME-PLATED BRASS**

Lenght mm 45 (35+10) **POLISHED CHROME-PLATED BRASS**



82093010K D 1 10 10

82093510K D 1 10 10

L C + D

Lenght mm 40 (30+10) **POLISHED AND LACQUERED BRASS**

Lenght mm 45 (35+10) **POLISHED AND LACQUERED BRASS**



82093010L D 1 10 10

82093510L D 1 10 10

L C + D

Lenght mm 40 (30+10) **SATIN NICKEL-PLATED BRASS**

Lenght mm 45 (35+10) **SATIN NICKEL-PLATED BRASS**



82093010N D 1 10 10

82093510N D 1 10 10



Code
Status
Single
package
Multiple
package
Min. ord.

F5

F5 **DOUBLE-PROFILE** cylinder, 5-pin big key. DIN straight cam.
3 KEYS (key blank code: 020259). Screw mm 65.




L C + D

Lenght mm 60 (30+30)	24 KT. GOLD-PLATED BRASS
Lenght mm 70 (30+40)	24 KT. GOLD-PLATED BRASS
Lenght mm 70 (35+35)	24 KT. GOLD-PLATED BRASS
Lenght mm 80 (40+40)	24 KT. GOLD-PLATED BRASS



82093030A	B	1	10	10
82093040A	D	1	10	10
82093535A	B	1	10	10
82094040A	C	1	10	10



L C + D

Lenght mm 60 (30+30)	ANTIQUE BRONZED BRASS
Lenght mm 70 (30+40)	ANTIQUE BRONZED BRASS
Lenght mm 70 (35+35)	ANTIQUE BRONZED BRASS
Lenght mm 80 (40+40)	ANTIQUE BRONZED BRASS



82093030B	B	1	10	10
82093040B	D	1	10	10
82093535B	B	1	10	10
82094040B	C	1	10	10

L C + D

Lenght mm 60 (30+30)	POLISHED CHROME-PLATED BRASS
Lenght mm 70 (30+40)	POLISHED CHROME-PLATED BRASS
Lenght mm 70 (35+35)	POLISHED CHROME-PLATED BRASS
Lenght mm 80 (40+40)	POLISHED CHROME-PLATED BRASS



82093030K	D	1	10	10
82093040K	D	1	10	10
82093535K	D	1	10	10
82094040K	D	1	10	10

L C + D

Lenght mm 60 (30+30)	POLISHED AND LACQUERED BRASS
Lenght mm 70 (30+40)	POLISHED AND LACQUERED BRASS
Lenght mm 70 (35+35)	POLISHED AND LACQUERED BRASS
Lenght mm 80 (40+40)	POLISHED AND LACQUERED BRASS



82093030L	D	1	10	10
82093040L	D	1	10	10
82093535L	D	1	10	10
82094040L	D	1	10	10

L C + D

Lenght mm 60 (30+30)	SATIN NICKEL-PLATED BRASS
Lenght mm 70 (30+40)	SATIN NICKEL-PLATED BRASS
Lenght mm 70 (35+35)	SATIN NICKEL-PLATED BRASS
Lenght mm 80 (40+40)	SATIN NICKEL-PLATED BRASS



82093030N	D	1	10	10
82093040N	D	1	10	10
82093535N	D	1	10	10
82094040N	D	1	10	10

Code
Status
Single
package
Multiple
package
Min. ord.

F5

F5 **DOUBLE-PROFILE** cylinder, 5-pin big key. **DOUBLE FUNCTION**, it also operates when keyed-in. DIN 30° projecting cam.

3 KEYS (keyblank code: 020259). Screw mm 65.

L C + D

Lenght mm 60 (30+30)

Lenght mm 65 (30+35)

Lenght mm 70 (30+40)

Lenght mm 75 (30+45)

Lenght mm 80 (30+50)

Lenght mm 85 (30+55)

Lenght mm 90 (30+60)

Lenght mm 95 (30+65)

Lenght mm 100 (30+70)

Lenght mm 105 (30+75)

Lenght mm 110 (30+80)

Lenght mm 70 (35+35)

Lenght mm 75 (35+40)

Lenght mm 80 (35+45)

Lenght mm 80 (40+40)

Lenght mm 85 (40+45)

Lenght mm 90 (40+50)

Lenght mm 95 (40+55)

Lenght mm 100 (40+60)


Lenght mm 90 (45+45)

Lenght mm 100 (50+50)

Lenght mm 110 (50+60)



BRASS

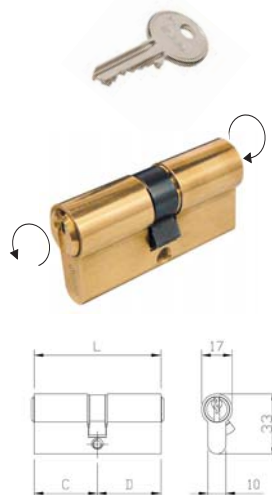

829930307	D	1	10	10
829930357	D	1	10	10
829930407	D	1	10	10
829930457	D	1	10	10
829930507	D	1	10	10
829930557	D	1	10	10
829930607	D	1	10	10
829930657	D	1	-	1
829930707	D	1	-	1
829930757	D	1	-	1
829930807	D	1	-	1
829935357	D	1	10	10
829935407	D	1	10	10
829935457	D	1	10	10
829940407	D	1	10	10
829940457	D	1	10	10
829940507	D	1	10	10
829940557	D	1	-	1
829940607	D	1	-	1
829945457	D	1	10	10
829950507	D	1	-	1
829950607	D	1	-	1

Min. ord.
Multiple
package
Single
package
Status
Code

F5

F5 **DOUBLE-PROFILE** cylinder, 5-pin big key. **DOUBLE FUNCTION**,
it also operates when keyed-in. DIN 30° projecting cam.
3 KEYS (keyblank code: 020259). Screw mm 65.

L C + D

Lenght mm 60 (30+30)

Lenght mm 65 (30+35)

Lenght mm 70 (30+40)

Lenght mm 75 (30+45)

Lenght mm 80 (30+50)

Lenght mm 85 (30+55)

Lenght mm 90 (30+60)

Lenght mm 95 (30+65)

Lenght mm 100 (30+70)

Lenght mm 105 (30+75)

Lenght mm 110 (30+80)

Lenght mm 70 (35+35)

Lenght mm 75 (35+40)

Lenght mm 80 (35+45)

Lenght mm 80 (40+40)

Lenght mm 85 (40+45)

Lenght mm 90 (40+50)

Lenght mm 95 (40+55)

Lenght mm 100 (40+60)

Lenght mm 90 (45+45)


Lenght mm 100 (50+50)

Lenght mm 110 (50+60)



NICKEL

829930309	B	1	10	10
829930359	B	1	10	10
829930409	B	1	10	10
829930459	B	1	10	10
829930509	B	1	10	10
829930559	D	1	10	10
829930609	D	1	10	10
829930659	D	1	-	1
829930709	D	1	-	1
829930759	D	1	-	1
829930809	D	1	-	1
829935359	B	1	10	10
829935409	B	1	10	10
829935459	B	1	10	10
829940409	B	1	10	10
829940459	B	1	10	10
829940509	B	1	10	10
829940559	D	1	-	1
829940609	D	1	-	1
829945459	B	1	10	10
829950509	C	1	-	1
829950609	D	1	-	1



Code
Status
Single
package
Multiple
package
Min. ord.

F5




F5 **SINGLE-PROFILE** cylinder with internal multifaceted round knob.
DIN 30° projecting cam. Screw mm 65.

L C + D

Lenght mm 40 (Knob 30+10)

Lenght mm 45 (Knob 35+10)

Lenght mm 50 (Knob 40+10)



BRASS

828930107	D	1	10	10
828935107	D	1	10	10
828940107	D	1	10	10



F5 **DOUBLE-PROFILE** cylinder with internal multifaceted round knob and
5-pin big external key. DIN 30° projecting cam.

3 KEYS (keyblank code: 020259). Screw mm 65.

L C + D

Lenght mm 56 (Knob 28+28)

Lenght mm 61 (Knob 28+33)

Lenght mm 60 (Knob 30+30)

Lenght mm 65 (Knob 30+35)

Lenght mm 70 (Knob 30+40)

Lenght mm 75 (Knob 30+45)

Lenght mm 90 (Knob 30+60)

Lenght mm 61 (Knob 33+28)

Lenght mm 65 (Knob 35+30)

Lenght mm 70 (Knob 35+35)

Lenght mm 80 (Knob 35+45)

Lenght mm 70 (Knob 40+30)

Lenght mm 80 (Knob 40+40)

Lenght mm 90 (Knob 40+50)

Lenght mm 75 (Knob 45+30)

Lenght mm 80 (Knob 45+35)

Lenght mm 90 (Knob 45+45)

Lenght mm 90 (Knob 50+40)

Lenght mm 105 (Knob 50+55)

Lenght mm 110 (Knob 50+60)

Lenght mm 90 (Knob 60+30)


Lenght mm 100 (Knob 60+40)

Lenght mm 105 (Knob 60+45)

Lenght mm 110 (Knob 60+50)

Lenght mm 120 (Knob 65+55)

Lenght mm 110 (Knob 80+30)



BRASS

828928287	D	1	10	10
828928337	D	1	10	10
828930307	D	1	10	10
828930357	D	1	10	10
828930407	D	1	10	10
828930457	D	1	10	10
828930607	D	1	10	10
828933287	D	1	10	10
828935307	D	1	10	10
828935357	D	1	10	10
828935457	D	1	10	10
828940307	D	1	10	10
828940407	D	1	10	10
828940507	D	1	10	10
828945307	D	1	10	10
828945357	D	1	10	10
828945457	D	1	10	10
828950407	D	1	10	10
828950557	D	1	-	1
828950607	D	1	-	1
828960307	D	1	10	10
828960407	D	1	-	1
828960457	D	1	-	1
828960507	D	1	-	1
828965557	D	1	-	1
828980307	D	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.

F5




F5 **SINGLE-PROFILE** cylinder with internal multifaceted round knob.
DIN 30° projecting cam. Screw mm 65.

L C + D

Lenght mm 40 (Knob 30+10)

Lenght mm 45 (Knob 35+10)

Lenght mm 50 (Knob 40+10)



NICKEL

828930109	D	1	10	10
828935109	D	1	10	10
828940109	D	1	10	10



F5 **DOUBLE-PROFILE** cylinder with internal multifaceted round knob and
5-pin big external key. DIN 30° projecting cam.

3 KEYS (keyblank code: 020259). Screw mm 65.

L C + D

Lenght mm 56 (Knob 28+28)

Lenght mm 61 (Knob 28+33)

Lenght mm 60 (Knob 30+30)

Lenght mm 65 (Knob 30+35)

Lenght mm 70 (Knob 30+40)

Lenght mm 75 (Knob 30+45)

Lenght mm 90 (Knob 30+60)

Lenght mm 61 (Knob 33+28)

Lenght mm 65 (Knob 35+30)

Lenght mm 70 (Knob 35+35)

Lenght mm 80 (Knob 35+45)

Lenght mm 70 (Knob 40+30)

Lenght mm 80 (Knob 40+40)

Lenght mm 90 (Knob 40+50)

Lenght mm 75 (Knob 45+30)

Lenght mm 80 (Knob 45+35)

Lenght mm 90 (Knob 45+45)

Lenght mm 90 (Knob 50+40)

Lenght mm 105 (Knob 50+55)

Lenght mm 110 (Knob 50+60)

Lenght mm 90 (Knob 60+30)


Lenght mm 100 (Knob 60+40)

Lenght mm 105 (Knob 60+45)

Lenght mm 110 (Knob 60+50)

Lenght mm 120 (Knob 65+55)

Lenght mm 110 (Knob 80+30)



NICKEL

828928289	D	1	10	10
828928339	D	1	10	10
828930309	D	1	10	10
828930359	D	1	10	10
828930409	C	1	10	10
828930459	D	1	10	10
828930609	D	1	10	10
828933289	D	1	10	10
828935309	D	1	10	10
828935359	C	1	10	10
828935459	D	1	10	10
828940309	D	1	10	10
828940409	C	1	10	10
828940509	D	1	10	10
828945309	D	1	10	10
828945359	D	1	10	10
828945459	D	1	10	10
828950409	D	1	10	10
828950559	D	1	-	1
828950609	D	1	-	1
828960309	D	1	10	10
828960409	D	1	-	1
828960459	D	1	-	1
828960509	D	1	-	1
828965559	D	1	-	1
828980309	D	1	-	1

Code
Status
Single
package
Multiple
package
Min. ord.

F5



F5 **EUROPEAN PROFILE** cylinder with internal flat knob.
DIN 30° projecting cam. Screw mm 65.

L C + D

Lenght mm 40 (Knob 30+10)

Lenght mm 45 (Knob 35+10)

Lenght mm 50 (Knob 40+10)




BRASS

825930107 D 1 10 10

825935107 D 1 10 10

825940107 D 1 10 10



F5 **EUROPEAN PROFILE** cylinder with internal flat knob and 5-pin external key.
DIN 30° projecting cam. **3 KEYS** (keyblank code: 020259). Screw mm 65.

L C + D

Lenght mm 56 (Knob 28+28)

Lenght mm 61 (Knob 28+33)

Lenght mm 60 (Knob 30+30)

Lenght mm 65 (Knob 30+35)

Lenght mm 70 (Knob 30+40)

Lenght mm 75 (Knob 30+45)

Lenght mm 90 (Knob 30+60)

Lenght mm 61 (Knob 33+28)

Lenght mm 65 (Knob 35+30)

Lenght mm 70 (Knob 35+35)

Lenght mm 80 (Knob 35+45)

Lenght mm 70 (Knob 40+30)

Lenght mm 80 (Knob 40+40)

Lenght mm 90 (Knob 40+50)

Lenght mm 75 (Knob 45+30)

Lenght mm 80 (Knob 45+35)

Lenght mm 90 (Knob 45+45)

Lenght mm 90 (Knob 50+40)

Lenght mm 105 (Knob 50+55)

Lenght mm 110 (Knob 50+60)

Lenght mm 90 (Knob 60+30)

Lenght mm 100 (Knob 60+40)

Lenght mm 105 (Knob 60+45)

Lenght mm 110 (Knob 60+50)

Lenght mm 120 (Knob 65+55)

Lenght mm 110 (Knob 80+30)



BRASS

825928287 D 1 10 10

825928337 D 1 10 10

825930307 A 1 10 10

825930357 D 1 10 10

825930407 C 1 10 10

825930457 D 1 10 10

825930607 D 1 10 10

825933287 D 1 10 10

825935307 D 1 10 10

825935357 B 1 10 10

825935457 D 1 10 10

825940307 C 1 10 10

825940407 C 1 10 10

825940507 C 1 10 10

825945307 D 1 10 10

825945357 D 1 10 10

825945457 C 1 10 10

825950407 C 1 10 10

825950557 D 1 - 1

825950607 D 1 - 1

825960307 D 1 10 10


825960407 D 1 - 1

825960457 D 1 - 1

825960507 D 1 - 1


825965557 D 1 - 1

825980307 D 1 - 1



Code
Status
Single
package
Multiple
package
Min. ord.

F5



F5 **EUROPEAN PROFILE** cylinder with internal flat knob.
DIN 30° projecting cam. Screw mm 65.

L C + D

Lenght mm 40 (Knob 30+10)

Lenght mm 45 (Knob 35+10)

Lenght mm 50 (Knob 40+10)




BRASS

825930109 B 1 10 10

825935109 B 1 10 10

825940109 B 1 10 10



F5 **EUROPEAN PROFILE** cylinder with internal flat knob and 5-pin external key.
DIN 30° projecting cam. **3 KEYS** (keyblank code: 020259). Screw mm 65.

L C + D

Lenght mm 56 (Knob 28+28)

Lenght mm 61 (Knob 28+33)

Lenght mm 60 (Knob 30+30)

Lenght mm 65 (Knob 30+35)

Lenght mm 70 (Knob 30+40)

Lenght mm 75 (Knob 30+45)

Lenght mm 90 (Knob 30+60)

Lenght mm 61 (Knob 33+28)

Lenght mm 65 (Knob 35+30)

Lenght mm 70 (Knob 35+35)

Lenght mm 80 (Knob 35+45)

Lenght mm 70 (Knob 40+30)

Lenght mm 80 (Knob 40+40)

Lenght mm 90 (Knob 40+50)

Lenght mm 75 (Knob 45+30)

Lenght mm 80 (Knob 45+35)

Lenght mm 90 (Knob 45+45)

Lenght mm 90 (Knob 50+40)

Lenght mm 105 (Knob 50+55)

Lenght mm 110 (Knob 50+60)

Lenght mm 90 (Knob 60+30)

Lenght mm 100 (Knob 60+40)

Lenght mm 105 (Knob 60+45)

Lenght mm 110 (Knob 60+50)

Lenght mm 120 (Knob 65+55)

Lenght mm 110 (Knob 80+30)



BRASS

825928289 D 1 10 10

825928339 C 1 10 10

825930309 A 1 10 10

825930359 C 1 10 10

825930409 B 1 10 10

825930459 A 1 10 10

825930609 B 1 10 10

825933289 D 1 10 10

825935309 B 1 10 10

825935359 A 1 10 10

825935459 C 1 10 10

825940309 C 1 10 10

825940409 B 1 10 10

825940509 B 1 10 10

825945309 D 1 10 10

825945359 D 1 10 10

825945459 C 1 10 10

825950409 D 1 10 10

825950559 C 1 - 1

825950609 D 1 - 1

825960309 C 1 10 10

825960409 D 1 - 1

825960459 D 1 - 1

825960509 D 1 - 1


825965559 D 1 - 1

825980309 D 1 - 1

Code
Status
Single
package
Multiple
package
Min. ord.

F5


F5 **EUROPEAN PROFILE** cylinder with internal flat knob and 5-pin external key.
DIN 30° projecting cam. **3 KEYS** (keyblank code: 020259). Screw mm 65.



L	C + D		Code	Status	Single package	Multiple package	Min. ord.
Lenght mm 60 (Knob 30+30)	24 KT. GOLD-PLATED BRASS		82593030A	D	1	10	10
Lenght mm 70 (Knob 35+35)	24 KT. GOLD-PLATED BRASS		82593535A	D	1	10	10
L	C + D		82593030B	D	1	10	10
Lenght mm 60 (Knob 30+30)	ANTIQUE BRONZED BRASS		82593535B	D	1	10	10
Lenght mm 70 (Knob 35+35)	ANTIQUE BRONZED BRASS						
L	C + D		82593030K	D	1	10	10
Lenght mm 60 (Knob 30+30)	POLISHED CHROME-PLATED BRASS		82593535K	C	1	10	10
Lenght mm 70 (Knob 35+35)	POLISHED CHROME-PLATED BRASS						
L	C + D		82593030L	D	1	10	10
Lenght mm 60 (Knob 30+30)	POLISHED AND LACQUERED BRASS		82593535L	D	1	10	10
Lenght mm 70 (Knob 35+35)	POLISHED AND LACQUERED BRASS						
L	C + D		82593030N	D	1	10	10
Lenght mm 60 (Knob 30+30)	SATIN NICKEL-PLATED BRASS		82593535N	D	1	10	10
Lenght mm 70 (Knob 35+35)	SATIN NICKEL-PLATED BRASS						

Code
Status
Single
package
Multiple
package
Min. ord.

F5

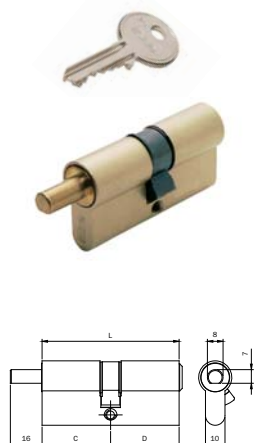

F5 **EUROPEAN PROFILE** cylinder with **D8X16 SHAFT** preset for internal knob and 5-pin external key. DIN 30° projecting cam.

3 KEYS (keyblank code: 020259). Screw mm 65.

L C + D

Lenght mm 56 (Knob 28+28)

Lenght mm 61 (Knob 28+33)

Lenght mm 60 (Knob 30+30)

Lenght mm 65 (Knob 30+35)

Lenght mm 70 (Knob 30+40)

Lenght mm 75 (Knob 30+45)

Lenght mm 90 (Knob 30+60)

Lenght mm 61 (Knob 33+28)

Lenght mm 65 (Knob 35+30)

Lenght mm 70 (Knob 35+35)

Lenght mm 80 (Knob 35+45)

Lenght mm 70 (Knob 40+30)

Lenght mm 80 (Knob 40+40)

Lenght mm 90 (Knob 40+50)

Lenght mm 75 (Knob 45+30)

Lenght mm 80 (Knob 45+35)

Lenght mm 90 (Knob 45+45)

Lenght mm 90 (Knob 50+40)

Lenght mm 105 (Knob 50+55)

Lenght mm 110 (Knob 50+60)

Lenght mm 90 (Knob 60+30)

Lenght mm 100 (Knob 60+40)

Lenght mm 105 (Knob 60+45)

Lenght mm 110 (Knob 60+50)

Lenght mm 120 (Knob 65+55)

Lenght mm 110 (Knob 80+30)



BRASS

826928287	B	1	10	10
826928337	D	1	10	10
826930307	B	1	10	10
826930357	D	1	10	10
826930407	D	1	10	10
826930457	D	1	10	10
826930607	D	1	10	10
826933287	D	1	10	10
826935307	D	1	10	10
826935357	B	1	10	10
826935457	D	1	10	10
826940307	D	1	10	10
826940407	C	1	10	10
826940507	D	1	10	10
826945307	D	1	10	10
826945357	D	1	10	10
826945457	D	1	10	10
826950407	D	1	10	10
826950557	D	1	-	1
826950607	D	1	-	1
826960307	D	1	10	10
826960407	D	1	-	1
826960457	D	1	-	1
826960507	D	1	-	1
826965557	D	1	-	1
826980307	D	1	-	1

F5 **EUROPEAN PROFILE** cylinder with **D8X75 SHAFT** preset for internal knob + F5 cylinder body mm 30 inside and 5-pin key outside. DIN 30° projecting cam.

3 KEYS (keyblank code: 020259). Screw mm 65.

L C + D

Body length F5 mm 60 (knob 30+30)

Body length F5 mm 65 (knob 30+35)

Body length F5 mm 70 (knob 30+40)

Body length F5 mm 75 (knob 30+45)

Body length F5 mm 80 (knob 30+50)

Body length F5 mm 85 (knob 30+55)


Body length F5mm 90 (knob 30+60)

Body length F5 mm 95 (knob 30+65)



BRASS

8269D0307	D	1	10	10
8269D0357	D	1	10	10
8269D0407	D	1	10	10
8269D0457	D	1	10	10
8269D0507	D	1	10	10
8269D0557	D	1	10	10
8269D0607	D	1	10	10
8269D0657	D	1	-	1



Code
Status
Single
package
Multiple
package
Min. ord.

F5



F5 **EUROPEAN PROFILE** cylinder with **D8X16 SHAFT** preset for internal knob and 5-pin external key. DIN 30° projecting cam.

3 KEYS (keyblank code: 020259). Screw mm 65.

L C + D

Lenght mm 56 (Knob 28+28)

Lenght mm 61 (Knob 28+33)

Lenght mm 60 (Knob 30+30)

Lenght mm 65 (Knob 30+35)

Lenght mm 70 (Knob 30+40)

Lenght mm 75 (Knob 30+45)

Lenght mm 90 (Knob 30+60)

Lenght mm 61 (Knob 33+28)

Lenght mm 65 (Knob 35+30)

Lenght mm 70 (Knob 35+35)

Lenght mm 80 (Knob 35+45)

Lenght mm 70 (Knob 40+30)

Lenght mm 80 (Knob 40+40)

Lenght mm 90 (Knob 40+50)

Lenght mm 75 (Knob 45+30)

Lenght mm 80 (Knob 45+35)

Lenght mm 90 (Knob 45+45)

Lenght mm 90 (Knob 50+40)

Lenght mm 105 (Knob 50+55)

Lenght mm 110 (Knob 50+60)

Lenght mm 90 (Knob 60+30)

Lenght mm 100 (Knob 60+40)

Lenght mm 105 (Knob 60+45)

Lenght mm 110 (Knob 60+50)

Lenght mm 120 (Knob 65+55)

Lenght mm 110 (Knob 80+30)



NICKEL

826928289 D 1 10 10

826928339 D 1 10 10

826930309 B 1 10 10

826930359 D 1 10 10

826930409 D 1 10 10

826930459 C 1 10 10

826930609 D 1 10 10

826933289 D 1 10 10

826935309 D 1 10 10

826935359 A 1 10 10

826935459 D 1 10 10

826940309 D 1 10 10

826940409 B 1 10 10

826940509 D 1 10 10

826945309 D 1 10 10

826945359 D 1 10 10

826945459 B 1 10 10

826950409 D 1 10 10

826950559 D 1 - 1

826950609 D 1 - 1

826960309 B 1 10 10

826960409 D 1 - 1

826960459 C 1 - 1

826960509 D 1 - 1

826965559 D 1 - 1

826980309 D 1 - 1

F5 **EUROPEAN PROFILE** cylinder with **D8X75 SHAFT** preset for internal knob + F5 cylinder body mm 30 inside and 5-pin key outside. DIN 30° projecting cam.

3 KEYS (keyblank code: 020259). Screw mm 65.

L C + D

Body length F5 mm 60 (knob 30+30)

Body length F5 mm 65 (knob 30+35)

Body length F5 mm 70 (knob 30+40)

Body length F5 mm 75 (knob 30+45)

Body length F5 mm 80 (knob 30+50)

Body length F5 mm 85 (knob 30+55)

Body length F5 mm 90 (knob 30+60)

Body length F5 mm 95 (knob 30+65)



NICKEL

8269D0309 D 1 10 10

8269D0359 D 1 10 10

8269D0409 D 1 10 10


8269D0459 D 1 10 10

8269D0509 D 1 10 10

8269D0559 D 1 10 10

8269D0609 D 1 10 10

8269D0659 D 1 - 1

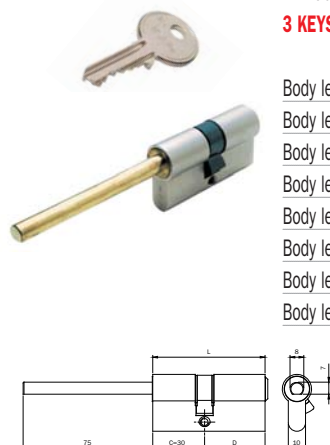

Code
Status
Single
package
Multiple
package
Min. ord.

F5



F5 **EUROPEAN PROFILE** cylinder with flat internal knob and external emergency cut for W.C. doors.
Straight DIN cam. Screw mm 65.

L C + D

Lenght mm 56 (Knob 28+28)

Lenght mm 60 (Knob 30+30)

Lenght mm 70 (Knob 35+35)




BRASS

825228287 D 1 10 10

825230307 B 1 10 10

825235357 B 1 10 10



F5 **EUROPEAN PROFILE** cylinder with flat internal knob and external emergency cut for W.C. doors.
Straight DIN cam. Screw mm 65.

L C + D

Lenght mm 56 (Knob 28+28)

Lenght mm 60 (Knob 30+30)

Lenght mm 70 (Knob 35+35)




NICKEL

825228289 D 1 10 10


825230309 B 1 10 10

825235359 B 1 10 10



Code
Status
Single
package
Multiple
package
Min. ord.

F5 U.K. market

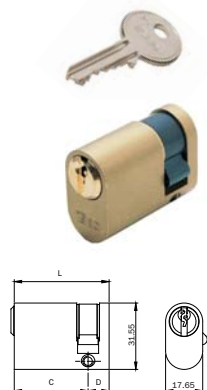

F5 **OVERSIZE SINGLE-PROFILE** oval cylinder, **U.K.** market, 5-pin big key.
ISEO 45° projecting cam. **3 KEYS** (keyblank code 020259). Screw mm 65.

L C + D

Lenght mm 40 (30+10)

Lenght mm 45 (35+10)

Lenght mm 50 (40+10)



BRASS

821130107 D 1 10 10

821135107 D 1 10 10

821140107 D 1 10 10



F5 **OVERSIZE DOUBLE-PROFILE** oval cylinder, **U.K.** market, 5-pin big key.
ISEO 45° projecting cam.
3 KEYS (keyblank code: 020259). Screw mm 65.

L C + D

Lenght mm 60 (30+30)

Lenght mm 70 (35+35)

Lenght mm 80 (40+40)



BRASS

821130307 D 1 10 10

821135357 B 1 10 10

821140407 D 1 10 10



F5 **OVERSIZE SINGLE-PROFILE** oval cylinder, **U.K.** market, 5-pin big key.
ISEO 45° projecting cam.
3 KEYS (keyblank code 020259). Screw mm 65.

L C + D

Lenght mm 40 (30+10)

Lenght mm 45 (35+10)

Lenght mm 50 (40+10)



NICKEL


821130109 C 1 10 10

821135109 C 1 10 10

821140109 D 1 10 10

Code
Status
Single
package
Multiple
package
Min. ord.

F5 U.K. market



F5 **OVERSIZE DOUBLE-PROFILE OVAL** cylinder, **U.K.** market, 5-pin big key.

ISEO 45° projecting cam.

3 KEYS (keyblank code: 020259). Screw mm 65.

L C + D

Lenght mm 60 (30+30)

Lenght mm 70 (35+35)

Lenght mm 80 (40+40)




NICKEL

821130309 C 1 10 10

821135359 B 1 10 10

821140409 C 1 10 10



F5 **OVERSIZE SINGLE-PROFILE OVAL** cylinder, **U.K.** market, with flat internal knob.

ISEO 45° projecting cam. Screw mm 65.

L C + D

Lenght mm 40 (30+10)

Lenght mm 45 (35+10)

Lenght mm 50 (40+10)




BRASS

827130107 D 1 10 10

827135107 D 1 10 10

827140107 D 1 10 10



F5 **OVERSIZE DOUBLE-PROFILE OVAL** cylinder, **U.K.** market, with flat internal knob.

and 5-pin big external key. ISEO 45° projecting cam.

3 KEYS (keyblank code 020259). Screw mm 65.

L C + D

Lenght mm 60 (30+30)

Lenght mm 70 (35+35)

Lenght mm 80 (40+40)



BRASS

827130307 D 1 10 10

827135357 C 1 10 10

827140407 D 1 10 10

Code
Status
Single
package
Multiple
package
Min. ord.

F5 U.K. market



F5 **OVERSIZE SINGLE-PROFILE OVAL** cylinder, **U.K.** market, with flat internal knob.
ISEO 45° projecting cam. Screw mm 65.

L C + D

Lenght mm 40 (30+10)

Lenght mm 45 (35+10)

Lenght mm 50 (40+10)




NICKEL

827130109 D 1 10 10

827135109 D 1 10 10

827140109 D 1 10 10



F5 **OVERSIZE DOUBLE-PROFILE OVAL** cylinder, **U.K.** market, with flat internal knob.
and 5-pin big external key. ISEO 45° projecting cam.

3 KEYS (keyblank code 020259). Screw mm 65.

L C + D

Lenght mm 60 (30+30)

Lenght mm 70 (35+35)

Lenght mm 80 (40+40)




NICKEL

827130309 D 1 10 10

827135359 B 1 10 10

827140409 C 1 10 10



Code
Status
Single
package
Multiple
package
Min. ord.

F5 U.K. market



F5 **OVERSIZE DOUBLE-PROFILE OVAL** cylinder, **U.K.** market, with round knurled internal knob.
and 5-pin big external key. ISEO 45° projecting cam.
3 KEYS (keyblank code 020259). Screw mm 65.

L C + D

Lenght mm 60 (30+30)

Lenght mm 70 (35+35)

Lenght mm 80 (40+40)




BRASS

827130307T D 1 10 10

827135357T D 1 10 10

827140407T D 1 10 10



F5 **OVERSIZE DOUBLE-PROFILE OVAL** cylinder, **U.K.** market, with round knurled internal knob.
and 5-pin big external key. ISEO 45° projecting cam.
3 KEYS (keyblank code 020259). Screw mm 65.

L C + D

Lenght mm 60 (30+30)

Lenght mm 70 (35+35)

Lenght mm 80 (40+40)







NICKEL

827130309T D 1 10 10

827135359T D 1 10 10

827140409T D 1 10 10





F5

F5 **SMALL SINGLE-PROFILE OVAL** cylinder, 5-pin small key.
ISEO 45° projecting cam. **3 KEYS** (keyblank code 020259). Screw mm 65.
Lenght mm 36 (27+9)

Code
Status
Single
package
Multiple
package
Min. ord.



BRASS
830027097 B 1 10 10

F5 **SMALL DOUBLE-PROFILE OVAL** cylinder, 5-pin small key.
3 KEYS (keyblank code 020259). Screw mm 65.

L C + D

Lenght mm 42 (21+21) Chiave 3 spine piccola 020139

Lenght mm 54 (27+27)

Lenght mm 60 (27+33)

Lenght mm 67 (27+40)

Lenght mm 60 (30+30)

Lenght mm 70 (30+40)

Lenght mm 66 (33+33)

Lenght mm 73 (33+40)



BRASS
830021217 C 1 10 10
830027277 A 1 10 10
830027337 D 1 10 10
830027407 D 1 10 10
830030307 C 1 10 10
830030407 C 1 10 10
830033337 D 1 10 10
830033407 D 1 10 10

F5 **SMALL DOUBLE-PROFILE OVAL** cylinder, 5-pin small key.
3 KEYS (keyblank code 020159). **Packed in nylon bags for industrial use.**

L C + D

Lenght mm 54 (27+27)

Lenght mm 60 (27+33)

Lenght mm 67 (27+40)

Lenght mm 60 (30+30)

Lenght mm 70 (30+40)

Lenght mm 66 (33+33)



NICKEL
830027093 B 1 10 10

Code
Status
Single
package
Multiple
package
Min. ord.

F5

F5 **SMALL SINGLE-PROFILE OVAL** cylinder, market, 5-pin small key. Polished nickel-plated brass.

3 KEYS (keyblank code: 020159). Screw mm 65.

L C + D

Lenght mm 42 (21+21) 3-pin little key 020139

Lenght mm 54 (27+27)

Lenght mm 60 (27+33)

Lenght mm 67 (27+40)

Lenght mm 60 (30+30)

Lenght mm 70 (30+40)

Lenght mm 66 (33+33)

Lenght mm 73 (33+40)



NICKEL

830021213 B 1 10 10

830027273 A 1 10 10

830027333 C 1 10 10

830027403 D 1 10 10

830030303 B 1 10 10

830030403 C 1 10 10

830033333 C 1 10 10

830033403 D 1 10 10



F5 **SMALL SINGLE-PROFILE OVAL** cylinder with internal flat knob and 5-pin small external key.

3 KEYS (keyblank code: 020159). Screw mm 65.

L C + D

Lenght mm 54 (27+27)

Lenght mm 60 (27+33)

Lenght mm 67 (27+40)




NICKEL

835027277 C 1 10 10

835027337 C 1 10 10

835027407 D 1 10 10

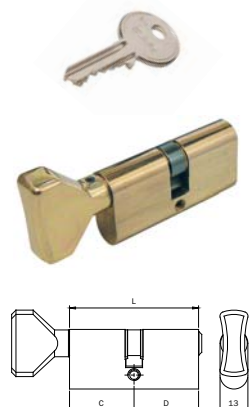

F5 **SMALL SINGLE-PROFILE OVAL** cylinder with internal flat knob and 5-pin small external key.

Polished nickel-plated brass. **3 KEYS** (keyblank code: 020159). Screw mm 65.

L C + D

Lenght mm 54 (27+27)

Lenght mm 60 (27+33)

Lenght mm 67 (27+40)




BRASS

835027273 C 1 10 10


835027333 D 1 10 10

835027403 D 1 10 10

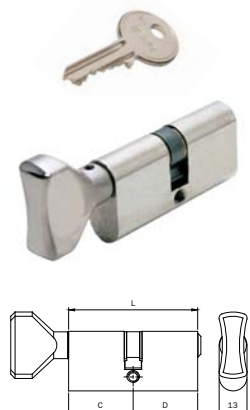

Code
Status
Single
package
Multiple
package
Min. ord.

F5



F5 **DOUBLE-PROFILE** round multifaceted cylinder **D 22**, 5-pin small key.

3 KEYS (keyblank code: 020159).

L C + D

Lenght mm 54 (27+27)

Lenght mm 60 (27+33)

Lenght mm 70 (30+40)

Lenght mm 66 (33+33)

Lenght mm 80 (40+40)

BRASS


840027277 A 1 10 10

840027337 D 1 10 10

840030407 D 1 10 10

840033337 D 1 10 10

840040407 D 1 10 10



F5 **DOUBLE-PROFILE** round multifaceted cylinder **D 26**, 5-pin big key.

Lenght mm 56 (28+28). **3 KEYS** (keyblank code: 020259).

BRASS

842028287 A 1 10 10

F5 with microswitch



F5 **THREADED** M26 cylinder with signaling **MICROSWITCH**. 5-pin nickel-plated

brass key. **3 KEYS** (keyblank code: 020259).

Common contact + normally opened + normally closed

NICKEL

855559 D 1 5 5

Code
Status
Single
package
Multiple
package
Min. ord.

F5




F5 **EXTERNAL DETACHED** cylinder to be applied on doors with a max. thickness of 85 mm **To be used with rim locks without external F5 cylinder.** 5-pin big key. Plate and screws for inside fixing. **3 KEYS** (keyblank code: 020259).

BRASS

850007 B 1 10 10

Packed in nylon bags for industrial use.


850007H A 1 10 10

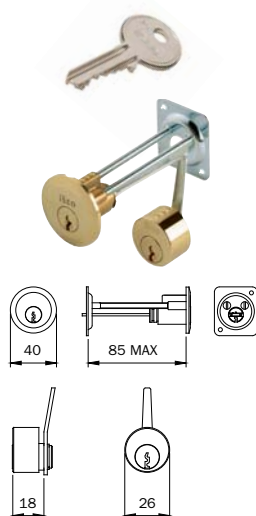

Pair composed of F5 **INTERNAL** cylinder to be applied to the lock and **EXTERNAL DETACHED** F5 cylinder to be applied on doors with a max. thickness of 85 mm **To be used with electric locks 501* series.** 5-pin big key. Plate and screws for inside fixing. **3 KEYS** (keyblank code 020259).

BRASS

851007 D 1 10 10

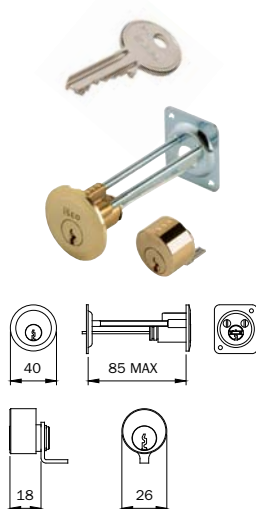

Pair composed of F5 **INTERNAL** cylinder to be applied to the lock and **EXTERNAL DETACHED** F5 cylinder to be applied on doors with a max. thickness of 85 mm **To be used with main door rim locks 4** series and electric locks 501* series latch bolt only.** 5-pin big key. Plate and screws for inside fixing. **3 KEYS** (keyblank code: 020259). (For series 421-422-423-424-425-426-441-442-483-484-4510-5210-5213-5214)

BRASS

851017 D 1 10 10


Code
Status
Single
package
Multiple
package
Min. ord.

F5

Pair composed of F5 **INTERNAL** cylinder to be applied to the lock and **EXTERNAL DETACHED** F5 cylinder to be applied on doors with a max. thickness of mm 85. **To be used with electric locks with throws 531**** series.** 5-pin big key. Plate and screws for inside fixing. **3 KEYS** (keyblank code: 020259). (For series 5310-5312-5314)

BRASS

851027 D 1 10 10

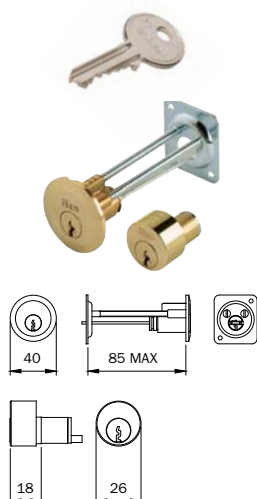

F5 **FIXED EXTERNAL** cylinder D 26. To be used with rim locks. 5-pin big key.

D 26 tube and fixing screws. **3 KEYS** (keyblank code: 020259).

BRASS

for doors with max. thickness mm 35

852357 D 1 10 10

for doors with max. thickness mm 40

852407 D 1 10 10

for doors with max. thickness mm 45

852457 D 1 10 10

for doors with max. thickness mm 50


852507 A 1 10 10

for doors with max. thickness mm 60

852607 C 1 10 10

for doors with max. thickness mm 70

852707 D 1 10 10




Pair composed of F5 cylinder **TO BE APPLIED** to the lock and F5 **EXTERNAL FIXED** cylinder **D 26** for doors with max. thickness mm 50.

To be used with electric locks 500*-505*** series.** 5-pin big key. Tube D 26 and fixing screws.

BRASS


3 KEYS (keyblank code: 020259).

853507 C 1 10 10

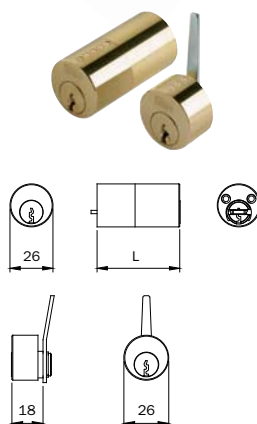

Code
Status
Single
package
Multiple
package
Min. ord.

F5

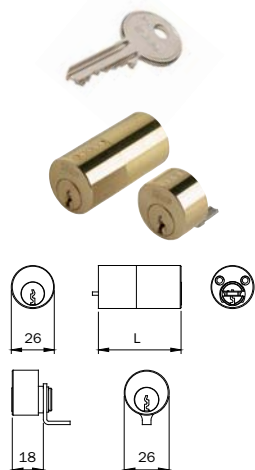

Pair composed of F5 **INTERNAL** cylinder to be applied to the lock and F5 **EXTERNAL FIXED CYLINDER D 26**.

To be used with main door rim locks and electric locks with latch bolt only. 5-pin big key. Tube D 26 and fixing screws. **3 KEYS** (keyblank code 020259).

For series (431-432-435-436-437-438-450-451-452-481-482-485-486-491-492-493-494-495-496-4250-4210-5950 4910-4350-5200-5203-5204-5205-5220-5224-5250-5253-5255)


for doors with max. thickness mm 45

for doors with max. thickness mm 50

for doors with max. thickness mm 70

BRASS

854457	D	1	10	10
854507	A	1	10	10
854707	D	1	10	10

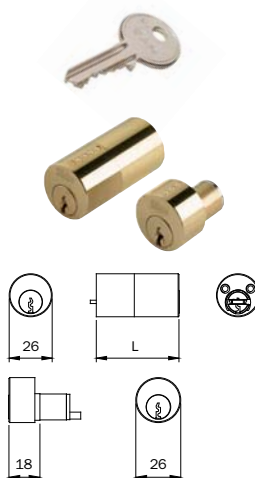

Pair composed of F5 **INTERNAL** cylinder to be applied to the lock and F5 **EXTERNAL FIXED CYLINDER D 26** for doors with max. thickness mm 50. **To be used with electric locks with throws 531**** series.** 5-pin big key.

Tube D 26 and fixing screws. **3 KEYS** (keyblank code: 020259).

(For series 5300-5302-5304-5305-5350-5352)

BRASS

858507	C	1	10	10
---------------	---	---	----	----

Code
Status
Single
package
Multiple
package
Min. ord.

F5



F5 **FIXED EXTERNAL** cylinder **D 26**. To be used with **VERROU** locks **460-465 series**. 5-pin big key.

3 KEYS (keyblank code: 020259).

for doors with max. thickness mm 30

for doors with max. thickness mm 40

for doors with max. thickness mm 45

for doors with max. thickness mm 50

for doors with max. thickness mm 60

BRASS


856307 D 1 10 10

856407 D 1 10 10

856457 D 1 10 10

856507 D 1 10 10

856607 D 1 10 10



Pair composed of F5 **INTERNAL CYLINDER** to be applied to the lock and F5 **FIXED EXTERNAL CYLINDER D 26**.

To be used with **VERROU** locks **470-475 series**. 5-pin big key.

3 KEYS (keyblank code: 020259).

for doors with max. thickness mm 30

for doors with max. thickness mm 40

for doors with max. thickness mm 45

for doors with max. thickness mm 50

for doors with max. thickness mm 60

BRASS



857307 D 1 10 10

857407 D 1 10 10

857457 D 1 10 10

857507 D 1 10 10

857607 D 1 10 10



Pump cylinders

**Cross-key
cylinders**

**Keys and
accessories**

Min. ord.
Multiple
package
Single
package
Status
Code

Pump cylinders



EXTERNAL PUMP cylinder. Body material: nickel-plated "zama" zinc alloy. Antidrill pin. Tear-resistant tube painted and carbonitrided steel. **3 KEYS**. Screws. For locks 901-903-910-911-913-915 series



L mm 32	NICKEL 990019	C	1	-	1
L mm 42	990010	B	1	-	1
L mm 52	990011	A	1	-	1
L mm 62	990012	A	1	-	1
L mm 72	990013	B	1	-	1
L mm 82	990014	B	1	-	1



EXTERNAL PUMP cylinder, **KEYED-ALIKE**. Body material: nickel-plated "zama" zinc alloy. Antidrill pin. Tear-resistant tube painted and carbonitrided steel. **3 KEYS**. Screws.

For locks 901-903-910-911-913-915 series

L mm. 32	NICKEL 990029	C	1	-	1
L mm 42	990020	C	1	-	1
L mm 52	990021	C	1	-	1
L mm 62	990022	D	1	-	1
L mm 72	990023	D	1	-	1
L mm 82	990024	D	1	-	1



Code
Status
Single
package
Multiple
package
Min. ord.

Cross-key cylinders

CROSS-KEY cylinder **ASSEMBLED** on "zama" alloy support . **3 KEYS** mm 78.

Two nylon key guides.

To be used with open-case locks for aluminium frames 78* series.

990875 A 1 10 10

CROSS-KEY cylinder **ASSEMBLED** on "zama" alloy support . **2 KEYS** mm 78.

Groups of 10 keyed-alike cylinders. Two nylon key guides.

To be used with open-case locks for aluminium frames 78* series.

990875..Y B 1 - 1

CROSS-KEY cylinder **ASSEMBLED** on "zama" alloy support . **2 KEYS** mm 78.

Keyed-alike fixed coding. Two nylon key guides.

To be used with open-case locks for aluminium frames 78* series.

keyed-alike fixed coding 88001

990875..Y1 A 1 - 1

keyed-alike fixed coding 88002

990875..Y2 B 1 - 1

keyed-alike fixed coding 88003

990875..Y3 B 1 - 1

keyed-alike fixed coding 88004

990875..Y4 C 1 - 1

keyed-alike fixed coding 88005

990875..Y5 C 1 - 1

CROSS-KEY cylinder assembled on "zama" alloy support . **3 KEYS** MM100.

Two nylon key guides.

To be used with open-case locks for aluminium frames 78* series.

990890 B 1 10 10

CROSS-KEY cylinder **ASSEMBLED** on "zama" alloy support . **3 KEYS** MM 100.

Groups of 10 keyed-alike cylinders. Two nylon key guides.

To be used with open-case locks for aluminium frames 78* series.

990890..Y D 1 - 10

For locks series:


781-782-783-7811-7812

7813-7814-7831-7832

7833-7834-7820-785*

787*-7817-7818-7838

Keys



Nickel-plated brass **F5 keyblank, 3 pins**, with ISEO profile;

small right-hand profile for oval cylinder 83002121


Code
Status
Multiple
package
Single
package
Min. ord.

020139 B 100 - 100

Nickel-plated brass **F5 keyblank, 3 pins**, with ISEO profile; to be ordered separately upon sample or through the ref. number.

Small right-hand profile for oval cylinder 83002121

02013C D 1 - 1



Nickel-plated brass **F5 keyblank, 4 pins**, with ISEO profile;


small right-hand profile for locks 100-101-102-103-106-107-108 and padlock mm.30 KA or SA

020149 B 100 - 100

Nickel-plated brass **F5 keyblank, 4 pins**, with ISEO profile; to be ordered separately upon sample or through the ref. number.

Small right-hand profile for locks 100-101-102-103-106-107-108 and padlock mm.30 KA or SA

02014C D 1 - 1



Nickel-plated brass **F5 keyblank, 5 pins**, with ISEO profile;


small right-hand profile for cylinders 8300-8350-8400 and padlock mm.40

020159 A 100 - 100

Nickel-plated brass **F5 keyblank, 5 pins**, with ISEO profile; to be ordered separately upon sample or through the ref. number.

Small right-hand profile for cylinders 8300-8350-8400 and padlock mm.40

02015C D 1 - 1



Nickel-plated brass **F5 keyblank, 3 pins**, with ISEO profile;


big right-hand profile for cylinders 82**2121* series

020239 B 100 - 100

Nickel-plated brass **F5 keyblank, 3 pins**, with ISEO profile; to be ordered separately upon sample or through the ref. number.

Big right-hand profile for cylinders 82**2121* series

02023C D 1 - 1



Nickel-plated brass **F5 keyblank, 4 pins**, with ISEO profile;

big right-hand profile for cylinders 82**2525*-82**2530* series

020249 B 100 - 100

Nickel-plated **F5 keyblank, 4 pins**, with **UNIVERSAL PROFILE**;


big right-hand profile, working length mm 23,7

0202491 B 100 - 100

Nickel-plated brass **F5 keyblank, 4 pins**, with ISEO profile; to be ordered separately upon sample or through the ref. number.

Big right-hand profile for cylinders 82**2525*-82**2530* series

02024C D 1 - 1



Nickel-plated brass **F5 keyblank, 4 pins**, with ISEO profile;

big right-hand profile for cylinders: 82*-845-846-850-851-852-853-854-856-857-858-8420*

020259 A 100 - 100

Nickel-plated **F5 keyblank, 5 pins**, with **UNIVERSAL PROFILE**;


big right-hand profile, working length mm 26,6

0202591 A 100 - 100

Nickel-plated brass **F5 keyblank, 5 pins**, with ISEO profile; to be ordered separately upon sample or through the ref. number.

Big right-hand profile for cylinders: 82*-845-846-850-851-852-853-854-856-857-858-8420*


02025C D 1 - 1



Nickel-plated **F5 keyblank, 5 pins**, with **UNIVERSAL PROFILE**;

big right-hand profile, working length mm 23,7


0203491 D 100 - 100



Nickel-plated **F5 keyblank, 5 pins**, with **UNIVERSAL PROFILE**;

big right-hand profile, working length mm 26,6

0203591 B 100 - 100




Nickel-plated **F5 keyblank, 5 pins**, with **CENTRAL PROFILE**;

big right-hand profile for locks 641-642

020409 B 100 - 100

Code
Status
Single
package
Multiple
package
Min. ord.

Keys




Nichel-plated brass **F6** key , **6 pins** for cylinders 81*9,
vertical profile,

020609 A 50 - 50

Nichel-plated brass **F6** key , **6 pins** for cylinders 81*9, ordered separately upon sample or through the ref. number,
vertical profile,

020689 D 1 - 1




Nichel-plated brass keyblank for flat-key cylinder **R6** series 88** , 6 pins

020809 A 50 - 50

Nichel-plated flat keyblank with **R6** profile to be ordered separately upon sample or through the ref. number.
for cylinders 88** series, 6 pins

020889 D 1 - 1




Nichel-plated brass keyblank for **R7** cylinder

020909 A 50 - 50

Nichel-plated brass flat keyblank for **R7** cylinder, to be ordered separately upon sample or through the ref. number.

020989 D 1 - 1




Nichel-plated steel keyblank for **CROSS-KEY CYLINDER** profile 990 series, working length mm 48, 6 pins

020275 B 30 - 30

Nichel-plated steel keyblank for **CROSS-KEY CYLINDER** profile 990 series, working length mm 70

020290 D 30 - 30




Chrome-plated brass keyblank for **PUMP CYLINDER** 9900* series

990001 A 30 - 30

Chrome-plated brass key, machined upon sample, for **PUMP CYLINDER**.

990002 D 1 - 1



Chrome-plated brass **DOUBLE-BIT** keyblank. Length mm. 79.

For locks 261-263-661-663-961*-963* series

990802 A 10 - 10

Chrome-plated brass **DOUBLE-BIT** key, machined upon sample. Length mm. 79.


For locks 261-263-661-663-961*-963* series

990803 D 10 - 10

Chrome-plated brass **DOUBLE-BIT** keyblank. Length mm. 100.

For locks 261-263-661-663-961*-963* series

990009 C 10 - 10



Chrome-plated brass **DOUBLE-BIT** keyblank. Length mm. 79.

For locks 981-983-961-963 series

990800 A 10 - 10

Chrome-plated brass **DOUBLE-BIT** key. Length mm. 100.

For locks 981-983-961-963 series

990800.100 D 10 - 10


Chrome-plated brass **DOUBLE-BIT** key, machined upon sample. Length mm. 79.

For locks 981-983-961-963 series

990801 D 10 - 10


Code
Status
Multiple
package
Single
package
Min. ord.

Accessories




Rubber grip for R7 keys.

044180 D 100 - 100



Nylon grip for double-bit keys and pump keys 990*** series.

990000 D 100 - 100



Flat ring nut for pump cylinder , cylinder drill D mm. 27.


990084 D 10 - 10

Nickel-plated ring nut for pump cylinder, tear-resistant tube hole D mm. 33.

990086 D 10 - 10

Nickel-plated **brass** ring for pump cylinder, tear-resistant tube hole D mm. 33.

990083 D 10 - 10




Brass concave ring nut for pump cylinder , cylinder drill D mm. 27.

990090 D 10 - 10


Brass convex ring nut for pump cylinder , cylinder drill D mm. 27.

990090/C D 10 - 10




Escutcheon with oval cylinder drill. Stainless steel. For cylinders 83** series.

042000 B 100 - 100



Escutcheon with oval cylinder drill. NYLON. For cylinders 83** series.

042001 A 100 - 100



Escutcheon with European-profile cylinder drill. SILVER-ANODISED aluminium.


042002 D 100 - 100

Escutcheon with European-profile cylinder drill. GOLD-ANODISED aluminium.

042003 B 100 - 100

Escutcheon with European-profile cylinder drill. BRONZE-ANODISED aluminium.

042004 D 100 - 100




Escutcheon with European-profile cylinder drill. BRASS.

042027 B 100 - 100

Escutcheon with European-profile cylinder drill. NICKEL-PLATED BRASS.

042029 D 100 - 100



Escutcheon with European-profile cylinder drill. STAINLESS STEEL.


042030 A 100 - 100

Escutcheon with European-profile cylinder drill. NYLON.

042040 B 100 - 100


Code
Status
Multiple
package
Single
package
Min. ord.

Accessories




Escutcheon for multi-faceted cylinder drill D 22. ZINC-PLATED STEEL. For cylinders 8400 series.

042005 D 100 - 100




Escutcheon for multi-faceted cylinder drill D 26. ZINC-PLATED STEEL. For cylinders 8420 series.

042006 B 100 - 100




Escutcheon for multi-faceted cylinder drill D 22. NYLON. For cylinders 8400 series.

042008 B 100 - 100




Escutcheon for multi-faceted cylinder drill D 26. NYLON. For cylinders 8420 series.

042007 D 100 - 100



Triangular escutcheon with round cylinder drill D 25. BRASS. For fixed cylinder 85* series.

042017 A 100 - 100




Escutcheon with round cylinder drill D 23. BRASS. For fixed cylinder 856*-857* series.

042067 D 100 - 100


Escutcheon with round cylinder drill D 23. NICKEL-PLATED BRASS. For fixed cylinder 856*-857* series.

042069 D 100 - 100



Escutcheon for round cylinder drill D 22. NYLON. For furniture locks cylinders.

043020 D 100 - 100




Extension kit for external fixed brass cylinder diameter 26 mm

003020 A 1 10 10


Code
Status
Min. ord.
Multiple
package
Single
package

Accessories




Protective modular ring nut for European-profile cylinder for **Multiblindo**; internal fixing. Internal and external. ring nuts, in **BLACK PAINTED** aluminium. External plate and antidrill device in carbonitrided steel. Plate spacer. Thicknesses. Antidrill balls for screw protection. Screws.

040809 B 1 - 1



Protective modular ring nut for European-profile cylinder for **Multiblindo**; internal fixing. Internal and external. ring nuts, in painted **BLANK** aluminium. External plate and antidrill device in carbonitrided steel. Plate spacer. Thicknesses. Antidrill balls for screw protection. Screws.

040809G C 1 - 1

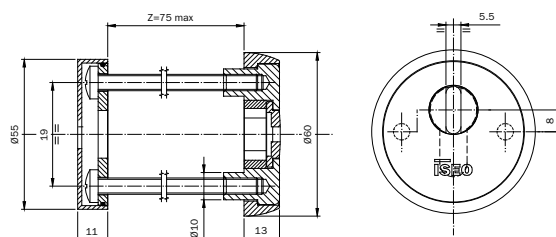

	KEY	L	KEY	L
		0 + 12.5		5 + 12.5
		0 + 12.5		7 + 12.5
				2 + 12.5

Protective escutcheon for European-profile cylinder, inside fixing. Carbonitrided and brass-plated steel. Clear finish. External protective plate. External escutcheon. Antidrill device. Disk spacer. Spacing ring. Internal plate. Internal escutcheon. Seal. Fixing screws.

043030 C 1 - 1




ROUND KNOB D 30. POLISHED BRASS. For knobset cylinders. Screw.

044117 C 1 10 10

ROUND KNOB D 30. NICKEL-PLATED BRASS. For knobset cylinders. Screw.

044119 C 1 10 10

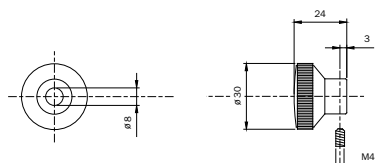


TRIANGULAR KNOB MM. 40. POLISHED BRASS. For knobset cylinders. Screw.

044147 B 1 10 10



TRIANGULAR KNOB MM. 40. NICKEL-PLATED BRASS. For knobset cylinders. Screw.

044149 B 1 10 10

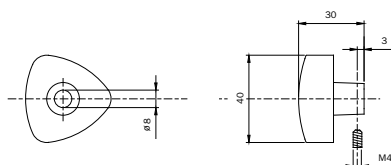

Code
Status
Single
package
Multiple
package
Min. ord.

Accessories



FLAT KNOB mm. 35. PAINTED AND POLISHED BRASS. For knobset cylinders. Screw.

Polished and lacquered



044167 A 1 10 10

Satin Nickel-plated



FLAT KNOB mm. 35. SATIN NICKEL-PLATED BRASS. For knobset cylinders. Screw.

044169 A 1 10 10

24 KT Gold-plated



FLAT KNOB mm. 35. 24 KT GOLD-PLATED BRASS. For knobset cylinders. Screw.

04416A D 1 10 10

Antique Bronzed



FLAT KNOB mm. 35. BRUSHED BRONZE-PLATED BRASS. For knobset cylinders. Screw.

04416B C 1 10 10

Polished Chrome-plated



FLAT KNOB mm. 35. POLISHED CHROME-PLATED BRASS. For knobset cylinders. Screw.

04416K D 1 10 10

Code
Status
Single
package
Multiple
package
Min. ord.

Accessories

Polished and lacquered



ROUND MULTI-FACETED KNOB mm. 30. POLISHED AND PAINTED BRASS. For knobset cylinders. Screw.

044177 B 1 10 10

Satin Nickel-plated



ROUND MULTI-FACETED KNOB mm. 30. SATIN NICKEL-PLATED BRASS. For knobset cylinders. Screw.

044179 A 1 10 10

24 KT Gold-plated



ROUND MULTI-FACETED KNOB mm. 30. 24 KT GOLD-PLATED BRASS. For knobset cylinders. Screw.

04417A D 1 10 10

Antique Bronzed



ROUND MULTI-FACETED KNOB mm. 30. BRUSHED BRONZE-PLATED BRASS. For knobset cylinders. Screw.



04417B D 1 10 10

Polished Chrome-plated



ROUND MULTI-FACETED KNOB mm. 30. POLISHED CHROME-PLATED BRASS. For knobset cylinders. Screw.

04417K D 1 10 10



Padlocks

Iustus

Aditus

Code
Status
Single
package
Multiple
package
Min. ord.

Iustus

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 20.** Chrome-plated steel shackle D3.

SHACKLE CLEARANCE MM 12. 2 KEYS.

800207 B 1 12 12

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 25.** Chrome-plated steel shackle D4.

SHACKLE CLEARANCE MM 15. 2 KEYS.

800257 B 1 12 12

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 25.** Chrome-plated steel shackle D4.

SHACKLE CLEARANCE MM 15. 2 KEYS. CODING AT OUR CHOICE.

800257..K C 1 12 12

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 25.** Chrome-plated steel shackle D4.

SHACKLE CLEARANCE MM 15. 2 KEYS.

Fixed coding 061

800257..K1 A 1 12 12

Fixed coding 062

800257..K2 D 1 12 12

Fixed coding 063

800257..K3 D 1 12 12

Fixed coding 064

800257..K4 D 1 12 12

Fixed coding 065

800257..K5 D 1 12 12

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 30.** Chrome-plated steel shackle D5.

SHACKLE CLEARANCE MM 18. 2 KEYS.

800307 A 1 12 12

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 30.** Chrome-plated steel shackle D5.

SHACKLE CLEARANCE MM 18. 2 KEYS. CODING AT OUR CHOICE

800307..K B 1 12 12

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 30.** Chrome-plated steel shackle D5.

SHACKLE CLEARANCE MM 18. 2 KEYS

Fixed coding 2141

800307..K1 B 1 12 12

Fixed coding 2222

800307..K2 C 1 12 12

Fixed coding 2243

800307..K3 B 1 12 12

Fixed coding 2164

800307..K4 D 1 12 12

Fixed coding 2185

800307..K5 D 1 12 12

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 40.** Chrome-plated steel shackle D6.

SHACKLE CLEARANCE MM 22. 2 KEYS. Antipick disk.

800407 A 1 12 12

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 40.** Chrome-plated steel shackle D6.

SHACKLE CLEARANCE MM 22. 2 KEYS. CODING AT OUR CHOICE.

Antipick disk.

800407..K B 1 12 12

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 40.** Chrome-plated steel shackle D6.

SHACKLE CLEARANCE MM 22. 2 KEYS (keyblank 020159).

Antipick disk.

Fixed coding 3151

800407..K1 B 1 12 12

Fixed coding 3152

800407..K2 B 1 12 12

Fixed coding 3153


800407..K3 D 1 12 12

Fixed coding 3154

800407..K4 D 1 12 12

Fixed coding 3155

800407..K5 D 1 12 12



A	H	D
20	12	3
25	15	4
30	18	5
40	22	6
50	28	8
60	35	10
70	44	12

Code
Status
Single
package
Multiple
package
Min. ord.

Iustus

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 28. 2 KEYS. (key blank code: 020259).

Antipick disk.

800507 A 1 10 10

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 28. 2 KEYS. (key blank code: 020259). **CODING ON REQUEST.**

Antipick disk.

800507..5 D 1 - -

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 28. 2 KEYS. (key blank code: 020259). **CODING AT OUR CHOICE.**

Antipick disk.

800507..K B 1 10 10

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 28. 2 KEYS. (key blank code: 020259). Antipick disk.

Fixed coding 4031

800507..K1 B 1 10 10

Fixed coding 4032

800507..K2 C 1 10 10

Fixed coding 4063

800507..K3 D 1 10 10

Fixed coding 4084

800507..K4 D 1 10 10

Fixed coding 4135

800507..K5 D 1 10 10

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 60.** Chrome-plated steel shackle D10.

SHACKLE CLEARANCE MM 35. 2 KEYS. (key blank code: 020259).

Antipick disk.

800607 A 1 10 10

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 60.** Chrome-plated steel shackle D10.

SHACKLE CLEARANCE MM 35. 2 KEYS. (key blank code: 020259). **CODING ON REQUEST.**

Antipick disk.

800607..5 D 1 - -

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 60.** Chrome-plated steel shackle D10.

SHACKLE CLEARANCE MM 35. 2 KEYS. (key blank code: 020259). **CODING AT OUR CHOICE.**

Antipick disk.

800607..K C 1 10 10

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 60.** Chrome-plated steel shackle D10.

SHACKLE CLEARANCE MM 35. 2 KEYS. (key blank code: 020259). Antipick disk.

Fixed coding 5081

800607..K1 D 1 10 10

Fixed coding 5082

800607..K2 D 1 10 10

Fixed coding 5193

800607..K3 D 1 10 10

Fixed coding 5204

800607..K4 D 1 10 10

Fixed coding 5215

800607..K5 D 1 10 10

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 70.** Chrome-plated steel shackle D12.

SHACKLE CLEARANCE MM 44. 2 KEYS. (key blank code: 020259).

Antipick disk.

800707 A 1 10 10

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 70.** Chrome-plated steel shackle D12.

SHACKLE CLEARANCE MM 44. 2 KEYS. (key blank code: 020259). **CODING ON REQUEST.**

Antipick disk.


800707..5 D 1 - -

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 70.** Chrome-plated steel shackle D12.

SHACKLE CLEARANCE MM 44. 2 KEYS. (key blank code: 020259). **CODING AT OUR CHOICE.**

Antipick disk.

800707..K D 1 10 10



A	H	D
20	12	3
25	15	4
30	18	5
40	22	6
50	28	8
60	35	10
70	44	12

Code
Status
Single
package
Multiple
package
Min. ord.

Iustus

Open shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 70.** Chrome-plated steel shackle D12.

SHACKLE CLEARANCE MM 44. 2 KEYS. (key blank code: 020259).

Antipick disk.

Fixed coding 6061	800707..K1	D	1	10	10
Fixed coding 6062	800707..K2	D	1	10	10
Fixed coding 6103	800707..K3	D	1	10	10
Fixed coding 6104	800707..K4	D	1	10	10
Fixed coding 6105	800707..K5	D	1	10	10

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 25.** Chrome-plated steel shackle D4.

SHACKLE CLEARANCE MM 25. 2 KEYS.

802257 B 1 12 12

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 25.** Chrome-plated steel shackle D4.

SHACKLE CLEARANCE MM 25. 2 KEYS. CODING AT OUR CHOICE.

802257..K D 1 12 12

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 30.** Chrome-plated steel shackle D5.

SHACKLE CLEARANCE MM 46. 2 KEYS.

802307 B 1 12 12

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 30.** Chrome-plated steel shackle D5.

SHACKLE CLEARANCE MM 46. 2 KEYS. CODING AT OUR CHOICE.

802307..K B 1 12 12

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 30.** Chrome-plated steel shackle D5.

SHACKLE CLEARANCE MM 67. 2 KEYS.

802317 C 1 12 12

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 30.** Chrome-plated steel shackle D5.

SHACKLE CLEARANCE MM 67. 2 KEYS. CODING AT OUR CHOICE.

802317..K D 1 12 12

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 30.** Chrome-plated steel shackle D5.

SHACKLE CLEARANCE MM 100. 2 KEYS.

802327 C 1 12 12

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 30.** Chrome-plated steel shackle D5.

SHACKLE CLEARANCE MM 100. 2 KEYS. CODING AT OUR CHOICE.

802327..K D 1 12 12

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 40.** Chrome-plated steel shackle D6.

SHACKLE CLEARANCE MM 47. 2 KEYS. Antipick disk.

802407 B 1 12 12

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 40.** Chrome-plated steel shackle D6.

SHACKLE CLEARANCE MM 47. 2 KEYS. Antipick disk. **CODING AT OUR CHOICE.**

802407..K C 1 12 12

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 40.** Chrome-plated steel shackle D6.

SHACKLE CLEARANCE MM 67. 2 KEYS. Antipick disk.

802417 B 1 12 12

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 40.** Chrome-plated steel shackle D6.

SHACKLE CLEARANCE MM 67. 2 KEYS. CODING AT OUR CHOICE. Antipick disk.

802417..K D 1 12 12

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 40.** Chrome-plated steel shackle D6.


SHACKLE CLEARANCE MM 90. 2 KEYS. Antipick disk.

802427 B 1 12 12

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 40.** Chrome-plated steel shackle D6.

SHACKLE CLEARANCE MM 90. 2 KEYS. CODING AT OUR CHOICE. Antipick disk.


802427..K D 1 12 12



	A	H	D
25	25	25	4
30	30	46	5
31	30	67	5
40	40	47	6
41	40	67	6
50	50	50	8
51	50	67	8
52	50	90	8

Code
Status
Single
package
Multiple
package
Min. ord.

Iustus



	A	H	D
32	30	100	5
42	40	90	6
50	50	50	8
51	50	67	8
53	50	152	8

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 50. 2 KEYS. (key blank code: 020259). Antipick disk.

802507 B 1 10 10

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 50. 2 KEYS (key blank code: 020259). **CODING ON REQUEST.** Antipick disk.

802507..5 D 1 - -

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 50. 2 KEYS. (key blank code: 020259). **CODING AT OUR CHOICE.** Antipick disk

802507..K D 1 10 10

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 67. 2 KEYS. (key blank code: 020259). Antipick disk.

802517 B 1 10 10

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 67. 2 KEYS. (key blank code: 020259). **CODING ON REQUEST.** Antipick disk.

802517..5 D 1 - -

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 67. 2 KEYS. (key blank code: 020259). **CODING AT OUR CHOICE.** Antipick disk.

802517..K D 1 10 10

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 90. 2 KEYS. (key blank code: 020259). Antipick disk.

802527 C 1 10 10

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 90. 2 KEYS. (key blank code: 020259). **CODING ON REQUEST.** Antipick disk.

802527..5 D 1 - -

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 90. 2 KEYS. (key blank code: 020259). **CODING AT OUR CHOICE.** Antipick disk.

802527..K D 1 10 10

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 152. 2 KEYS. (key blank code: 020259). Antipick disk.

802537 C 1 10 10

Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 152. 2 KEYS. (key blank code: 020259). **CODING ON REQUEST.** Antipick disk.

802537..5 D 1 - -


Long shackle IUSTUS padlock. **BODY MATERIAL: BRASS, MM 50.** Chrome-plated steel shackle D8.

SHACKLE CLEARANCE MM 152. 2 KEYS. (key blank code: 020259). **CODING AT OUR CHOICE.** Antipick disk.

802537..K D 1 10 10

Code
Status
Single
package
Multiple
package
Min. ord.

Iustus



A	E	H	D
70	20	15	12
90	36	18	12

RECTANGULAR IUSTUS padlock for gates. **BRASS BODY MM 70.** Shaft material: chrome-plated carbonitrided steel D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 20 X 15.**

2 KEYS. (key blank code: 020259).

804707 B 1 6 6

RECTANGULAR IUSTUS padlock for gates. **BRASS BODY MM 70.** Shaft material: chrome-plated carbonitrided steel D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 20 X 15.**

2 KEYS. (key blank code: 020259). **CODING ON REQUEST.**

804707..5 D 1 6 1

RECTANGULAR IUSTUS padlock for gates. **BRASS BODY MM 70.** Shaft material: chrome-plated carbonitrided steel D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 20 X 15.**

2 KEYS. (key blank code: 020259). **CODING AT OUR CHOICE.**

804707..K C 1 6 6

RECTANGULAR IUSTUS padlock for gates. **BRASS BODY MM 90.** Shaft material: chrome-plated carbonitrided steel D 12, opening grip. Shaft ball-locking. Shaft clearance mm 36x18.

2 KEYS. (key blank code: 020259).

804907 A 1 6 6

RECTANGULAR IUSTUS padlock for gates. **BRASS BODY MM 90.** Shaft material: chrome-plated carbonitrided steel D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36X18.**


2 KEYS. (key blank code: 020259). **CODING ON REQUEST.**

804907..5 D 1 6 1

RECTANGULAR IUSTUS padlock for gates. **BRASS BODY MM 90.** Shaft material: chrome-plated carbonitrided steel D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36X18.**

2 KEYS. (key blank code: 020259). **CODING AT OUR CHOICE.**

804907..K C 1 6 6



RECTANGULAR **ARMoured** IUSTUS padlock for gates. Brass body mm90. Armour material: chrome-plated, carbonitrided steel. Shaft material: chrome-plated carbonitrided steel D 12, opening grip, Shaft ball-locking.

2 KEYS. (key blank code: 020259). **SHAFT CLEARANCE MM 36 X 18.**

805909 A 1 6 6

RECTANGULAR **ARMoured** IUSTUS padlock for gates. Brass body mm90. Armour material: chrome-plated, carbonitrided steel. Shaft material: chrome-plated carbonitrided steel D 12, opening grip, Shaft ball-locking.

2 KEYS. (key blank code: 020259). **SHAFT CLEARANCE MM 36 X 18. CODING ON REQUEST**

805909..5 D 1 6 1

RECTANGULAR **ARMoured** IUSTUS padlock for gates. Brass body mm90. Armour material: chrome-plated, carbonitrided steel. Shaft material: chrome-plated carbonitrided steel D 12, opening grip, Shaft ball-locking.

SHAFT CLEARANCE MM 36 X 18. CODING AT OUR CHOICE. 2 KEYS. (key blank code: 020259).

805909..K C 1 6 6

Iustus

Code
Status
Single
package
Multiple
package
Min. ord.



RECTANGULAR GATE padlock BOXER, **FULLY ARMoured**, for gates. Body material: Zama zinc alloy. Armour material: chrome-plated carbonitrided steel. Shaft material: chrome-plated carbonitrided steel, mm 90. It operates with European single-profile cylinder **F5** mm 40 (30+10), supplied with off-center cam art. 820930107. Stainless steel shaft D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 17,5.**

When the padlock is open the armour can be removed to replace the cylinder. **3 KEYS.** (key blank code: 020259).


809909 B 1 - 1



RECTANGULAR GATE padlock BOXER, **FULLY ARMoured**, for gates. Body material: Zama zinc alloy. Armour material: chrome-plated carbonitrided steel mm 40 (30+10), supplied with off-center cam art. 820930107. Stainless steel shaft D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 17,5.**

When the padlock is open the armour can be removed to replace the cylinder. **3 KEYS.** (key blank code: 020259).

809909..5 D 1 - 1



RECTANGULAR GATE padlock BOXER, **FULLY ARMoured**, for gates. Body material: Zama zinc alloy. Armour material: chrome-plated carbonitrided steel. Shaft material: chrome-plated carbonitrided steel, mm 90. It operates with European single-profile cylinder **F5** carbonitrided steel mm 40 (30+10), supplied with off-center cam art. 820930107. Stainless steel shaft D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 17,5.**

When the padlock is open the armour can be removed to replace the cylinder. **3 KEYS.** (key blank code: 020259).

809909..K C 1 - 1



RECTANGULAR GATE padlock BOXER, **FULLY ARMoured**, for gates. Body material: Zama zinc alloy. Armour material: chrome-plated carbonitrided steel. Shaft material: chrome-plated carbonitrided steel, mm 90. It operates with European single-profile cylinder **F6** carbonitrided steel mm 40 (30+10), supplied with off-center cam art. 810930107. Stainless steel shaft D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 17,5.**

When the padlock is open the armour can be removed to replace the cylinder. **3 KEYS.**
(key blank code: 020609).

809909..F6 D 1 - 1



RECTANGULAR GATE padlock BOXER, **FULLY ARMoured**, for gates. Body material: Zama zinc alloy. Armour material: chrome-plated carbonitrided steel. Shaft material: chrome-plated carbonitrided steel, mm 90. It operates with European single-profile cylinder **F6** carbonitrided steel mm 40 (30+10), supplied with off-center cam art. 810930107.8 Stainless steel shaft D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 17,5.**

When the padlock is open the armour can be removed to replace the cylinder. **3 KEYS.** (key blank code: 020609).

CODING ON REQUEST.

809909.8F6 D 1 - 1

RECTANGULAR GATE padlock BOXER, **FULLY ARMoured**, for gates. Body material: Zama zinc alloy. Armour material: chrome-plated carbonitrided steel. Shaft material: chrome-plated carbonitrided steel, mm 90. It operates with European single-profile cylinder **F6** carbonitrided steel mm 40 (30+10), supplied with off-center cam art. 810930107. Stainless steel shaft D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 17,5.**

When the padlock is open the armour can be removed to replace the cylinder. **3 KEYS.**
(key blank code: 020609). **CODING AT OUR CHOICE.**

809909..KF6 D 1 - 1



RECTANGULAR GATE padlock BOXER, **FULLY ARMoured**, for gates. Body material: Zama zinc alloy. Armour material: chrome-plated carbonitrided steel. Shaft material: chrome-plated carbonitrided steel, mm 90. It operates with European single-profile cylinder **R6** mm 40 (30+10), supplied with off-center cam art. 820930107. Stainless steel shaft D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 17,5.** (key blank code: 020809).

When the padlock is open the armour can be removed to replace the cylinder. **3 KEYS.**

809909.R6 A 1 - 1

RECTANGULAR GATE padlock BOXER, **FULLY ARMoured**, for gates. Body material: Zama zinc alloy. Armour material: chrome-plated carbonitrided steel. Shaft material: chrome-plated carbonitrided steel, mm 90. It operates with European single-profile cylinder **R6** mm 40 (30+10), supplied with off-center cam art. 880930109.8. Stainless steel shaft D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 17,5.** (key blank code: 020809).

When the padlock is open the armour can be removed to replace the cylinder. **3 KEYS. CODING ON REQUEST.**

809909.8R6 D 1 - 1

Code
Status
Single
package
Multiple
package
Min. ord.

Iustus

RECTANGULAR GATE padlock BOXER, **FULLY ARMoured**, for gates. Body material: Zama zinc alloy. Armour material: chrome-plated carbonitrided steel. Shaft material: chrome-plated carbonitrided steel, mm 90. It operates with European single-profile cylinder **R6** mm 40 (30+10), supplied with off-center cam art. 880930109.8.

Stainless steel shaft D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 17,5.**

When the padlock is open the armour can be removed to replace the cylinder. **3 KEYS.**

(key blank code: 020809). **CODING AT OUR CHOICE.**

809909..KR6 D 1 - 1

RECTANGULAR GATE padlock BOXER, **FULLY ARMoured**, for gates. Body material: Zama zinc alloy. Armour material: chrome-plated carbonitrided steel. Shaft material: chrome-plated carbonitrided steel, mm 90. It operates with European single-profile cylinder **R7** mm 40 (30+10), supplied with off-center cam art.89R7030109.8.

Stainless steel shaft D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 17,5.** When the

padlock is open the armour can be removed to replace the cylinder. **3 KEYS.** (key blank code: 020909).

809909..R7 C 1 - 1

RECTANGULAR GATE padlock BOXER, **FULLY ARMoured**, for gates. Body material: Zama zinc alloy.

Armour material: chrome-plated carbonitrided steel. Shaft material: chrome-plated carbonitrided steel, mm 90.

It operates with European single-profile cylinder **R7** mm 40 (30+10), supplied with off-center cam art.89R7030109.8.

Stainless steel shaft D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 17,5.** When the

padlock is open the armour can be removed to replace the cylinder. **3 KEYS.** (key blank code: 020909).

CODING ON REQUEST.

809909.8R7 D 1 - 1

RECTANGULAR GATE padlock BOXER, **FULLY ARMoured**, for gates. Body material: Zama zinc alloy. Armour material: chrome-plated carbonitrided steel. Shaft material: chrome-plated carbonitrided steel, mm 90. It operates with European single-profile cylinder **R7** mm 40 (30+10), supplied with off-center cam art.89R7030109.8.

Stainless steel shaft D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 17,5.**

When the padlock is open the armour can be removed to replace the cylinder. **3 KEYS.** (key blank code: 020909).

CODING AT OUR CHOICE.


809909.KR7 D 1 - 1

RECTANGULAR GATE padlock BOXER, **FULLY ARMoured**, for gates. Body material: Zama zinc alloy. Armour material: chrome-plated carbonitrided steel. Shaft material: chrome-plated carbonitrided steel, mm 90. It operates with European single-profile cylinder **R7** mm 40 (30+10) off-center cam. Stainless steel shaft D 12, opening grip.

Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 17,5.**


When the padlock is open the armour can be removed to replace the cylinder.

809909I A 1 - 1




Code
Status
Single
package
Multiple
package
Min. ord.

Aditus



	A	H	D
P00020127	20	10	3,5
P00025157	25	15,5	4,2
P00025257	25	25	4,2
P00030167	30	16	5,1
P00030467	30	46	5,1
P00040217	40	23,9	5,1
P00040477	40	47	6,3
P00040707	40	70	6,3
P00050277	50	29,5	8,0
P00050507	50	50	8,0
P00060377	60	37,5	9,5
P00070427	70	41	11,0



Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 20.** Tempered and chrome-plated steel shackle D 3,5 **SHACKLE CLEARANCE MM 10. 2 KEYS**

P00020127 A 1 12 12

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 20.** Tempered and chrome-plated steel shackle D 3,5 **SHACKLE CLEARANCE MM 10. 2 KEYS. CODING AT OUR CHOICE.**

P00020127.K B 1 12 12

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 25.** Tempered and chrome-plated steel shackle D 4,2 **SHACKLE CLEARANCE MM 15,5. 2 KEYS**

P00025157 A 1 12 12

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 25.** Tempered and chrome-plated steel shackle D 4,2 **SHACKLE CLEARANCE MM 15,5. 2 KEYS CODING AT OUR CHOICE.**

P00025157.K B 1 12 12

Open-shackle ADITUS padlock. **Body: satin polished brass mm 25.** Tempered and chrome-plated steel shackle D 4,2 **SHACKLE CLEARANCE MM 25. 2 KEYS**

P00025257 B 1 12 12

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 25.** Tempered and chrome-plated steel shackle D 4,2 **SHACKLE CLEARANCE MM 25. 2 KEYS. CODING AT OUR CHOICE.**

P00025257.K D 1 12 12

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 30.** Tempered and chrome-plated steel shackle D 5,1 **SHACKLE CLEARANCE MM 16. 2 KEYS**

P00030167 A 1 12 12

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 30.** Tempered and chrome-plated steel shackle D 5,1 **SHACKLE CLEARANCE MM 16. 2 KEYS CODING AT OUR CHOICE.**

P00030167.K B 1 12 12

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 30.** Tempered and chrome-plated steel shackle D 5,1 **SHACKLE CLEARANCE MM 46. 2 KEYS**

P00030467 A 1 12 12

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 30.** Tempered and chrome-plated steel shackle D 5,1 **SHACKLE CLEARANCE MM 46. 2 KEYS CODING AT OUR CHOICE.**

P00030467.K B 1 12 12

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 40.** Tempered and chrome-plated steel shackle D 6,3 **SHACKLE CLEARANCE MM 23,9. 2 KEYS**

P00040217 A 1 12 12

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 40.** Tempered and chrome-plated steel shackle D 6,3 **SHACKLE CLEARANCE MM 23,9. 2 KEYS. CODING AT OUR CHOICE.**

P00040217.K A 1 12 12

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 40.** Tempered and chrome-plated steel shackle D 6,3 **SHACKLE CLEARANCE MM 47. 2 KEYS**

P00040477 B 1 12 12

Open-shackle Aditus padlock. **Body: satin polished brass mm 40.** Tempered and chrome-plated steel shackle D 6,3 **SHACKLE CLEARANCE MM 47. 2 KEYS. CODING AT OUR CHOICE.**


P00040477.K C 1 12 12

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 40.** Tempered and chrome-plated steel shackle D 6,3 **SHACKLE CLEARANCE MM 70. 2 KEYS**

P00040707 B 1 12 12

Code
Status
Single
package
Multiple
package
Min. ord.

Aditus



Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 50.** Tempered and chrome-plated steel shackle D 8 **SHACKLE CLEARANCE MM 29,5. 2 KEYS.**

P00050277 A 1 6 6

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 50.** Tempered and chrome-plated steel shackle D 8 **SHACKLE CLEARANCE MM 29,5. 2 KEYS. CODING AT OUR CHOICE.**

P00050277.K B 1 6 6

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 50.** Tempered and chrome-plated steel shackle D 8 **SHACKLE CLEARANCE MM 50. 2 KEYS.**

P00050507 A 1 6 6

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 50.** Tempered and chrome-plated steel shackle D 8 **SHACKLE CLEARANCE MM 50. 2 KEYS. CODING AT OUR CHOICE.**

P00050507.K C 1 6 6

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 60.** Tempered and chrome-plated steel shackle D 9,5 **SHACKLE CLEARANCE MM 37,5. 2 KEYS.**

P00060377 A 1 6 6

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 60.** Tempered and chrome-plated steel shackle D 9,5 **SHACKLE CLEARANCE MM 37,5. 2 KEYS. CODING AT OUR CHOICE.**

P00060377.K B 1 6 6

Open-shackle ADITUS padlock. **BODY: SATIN POLISHED BRASS MM 70.** Tempered and chrome-plated steel shackle D 11 **SHACKLE CLEARANCE MM 41. 2 KEYS.**

P00070427 B 1 6 6

Open-shackle ADITUS padlock. Body: satin polished brass mm 70. Tempered and chrome-plated steel shackle D 11 **SHACKLE CLEARANCE MM 41. 2 KEYS. CODING AT OUR CHOICE.**

P00070427.K D 1 6 6

	A	H	D
P00020127	20	10	3,5
P00025157	25	15,5	4,2
P00025257	25	25	4,2
P00030167	30	16	5,1
P00030467	30	46	5,1
P00040217	40	23,9	5,1
P00040477	40	47	6,3
P00040707	40	70	6,3
P00050277	50	29,5	8,0
P00050507	50	50	8,0
P00060377	60	37,5	9,5
P00070427	70	41	11,0

Code
Status
Single
package
Multiple
package
Min. ord.

Aditus



RECTANGULAR ADITUS padlock for gates. **BODY: PAINTED SATIN BRASS MM 50.**

Shaft material: chrome-plated carbonitrided steel D 8. Shaft ball-locking. **SHAFT CLEARANCE MM 15 X 12,5.**

2 KEYS.

P04050177 B 1 12 12



RECTANGULAR ADITUS padlock for gates. **BODY: PAINTED SATIN BRASS MM 50.**

Shaft material: chrome-plated carbonitrided steel D 8. Shaft ball-locking. **SHAFT CLEARANCE MM 15 X 12,5.**

2 KEYS. CODING AT OUR CHOICE.

P04050177.K D 1 12 12

RECTANGULAR ADITUS padlock for gates. **BODY: PAINTED SATIN BRASS MM 60.**

Shaft material: chrome-plated carbonitrided steel D 10. Shaft ball-locking. **SHAFT CLEARANCE MM 18 X 14**

2 KEYS.


P04060187 B 1 6 6

RECTANGULAR ADITUS padlock for gates. **BODY: PAINTED SATIN BRASS MM 60.**

Shaft material: chrome-plated carbonitrided steel D 10. Shaft ball-locking. **SHAFT CLEARANCE MM 18 X 14**

2 KEYS. CODING AT OUR CHOICE.

P04060187.K D 1 6 6



RECTANGULAR ADITUS padlock for gates. **BODY: PAINTED SATIN BRASS MM 70.**

Shaft material: chrome-plated carbonitrided steel D 12. Shaft ball-locking. **SHAFT CLEARANCE MM 22X14,5**

2 KEYS.

P04070127 A 1 6 6

RECTANGULAR ADITUS padlock for gates. **BODY: PAINTED SATIN BRASS MM 70.**

Shaft material: chrome-plated carbonitrided steel D 12. Shaft ball-locking. **SHAFT CLEARANCE MM 22X14,5**

2 KEYS. CODING AT OUR CHOICE.

P04070127.K C 1 6 6

	A	E	H	D
P04050177	50	15	12,5	8
P04060187	60	18	14	10
P04070127	68	22	14,5	12
P04090197	90	36	19	12

RECTANGULAR ADITUS padlock for gates. **BODY: PAINTED SATIN BRASS MM 90.**

Shaft material: chrome-plated carbonitrided steel D 12. Shaft ball-locking. **SHAFT CLEARANCE MM 36X19.**

2 KEYS.

P04090197 A 1 6 6

RECTANGULAR ADITUS padlock for gates. **BODY: PAINTED SATIN BRASS MM 90.**

Shaft material: chrome-plated carbonitrided steel D 12. Shaft ball-locking. **SHAFT CLEARANCE MM 36X19.**

2 KEYS. CODING AT OUR CHOICE.

P04090197.K B 1 6 6

Code
Status
Single
package
Multiple
package
Min. ord.

Aditus



RECTANGULAR **ARMoured** ADITUS padlock for gates. **BRASS BODY MM 60**. Armour material: chrome-plated, carbonitrided and sand-blasted. Shaft material: chrome-plated carbonitrided steel D 10, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 22 X 11,5. 2 KEYS.**

P04960227 B 1 6 6



RECTANGULAR **ARMoured** ADITUS padlock for gates. **BRASS BODY MM 60**. Armour material: chrome-plated, carbonitrided and sand-blasted. Shaft material: chrome-plated carbonitrided steel D 10, Shaft ball-locking. **SHAFT CLEARANCE MM 22 X 11,5. 2 KEYS. CODING AT OUR CHOICE.**


P04960227.K D 1 6 6

RECTANGULAR **ARMoured** ADITUS padlock for gates. **BRASS BODY MM 70**. Armour material: chrome-plated, carbonitrided and sand-blasted. Shaft material: chrome-plated carbonitrided steel D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 22 X 15. 2 KEYS.**

P04970227 B 1 6 6

RECTANGULAR **ARMoured** ADITUS padlock for gates. **BRASS BODY MM 70**. Armour material: chrome-plated, carbonitrided and sand-blasted. Shaft material: chrome-plated carbonitrided steel D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 22 X 15. 2 KEYS. CODING AT OUR CHOICE.**

P04970227.K D 1 6 6



RECTANGULAR **ARMoured** ADITUS padlock for gates. **BRASS BODY MM 90**. Armour material: chrome-plated, carbonitrided and sand-blasted. Shaft material: chrome-plated carbonitrided steel D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 18. 2 KEYS.**

P04990367 A 1 6 6



RECTANGULAR **ARMoured** ADITUS padlock for gates. **BRASS BODY MM 90**. Armour material: chrome-plated, carbonitrided and sand-blasted. Shaft material: chrome-plated carbonitrided steel D 12, opening grip. Shaft ball-locking. **SHAFT CLEARANCE MM 36 X 18. 2 KEYS. CODING AT OUR CHOICE.**

P04990367.K C 1 6 6

	A	E	H	D
P04960227	62	22	11,5	10
P04970227	71	22	15	12
P04990367	91	36	18	12


Code
Status
Confezione
singola
Confezione
multipla
Min. ord.

Accessories




ANTIPICK DISK for padlock 809* with R6-R11 cylinder for
keys with a max. thickness of 3,7 mm


004377 D 50 - 50



FLOOR ANCHOR BRASS HOUSING for rectangular padlocks 804-805-809 series

004907 A 1 - 1



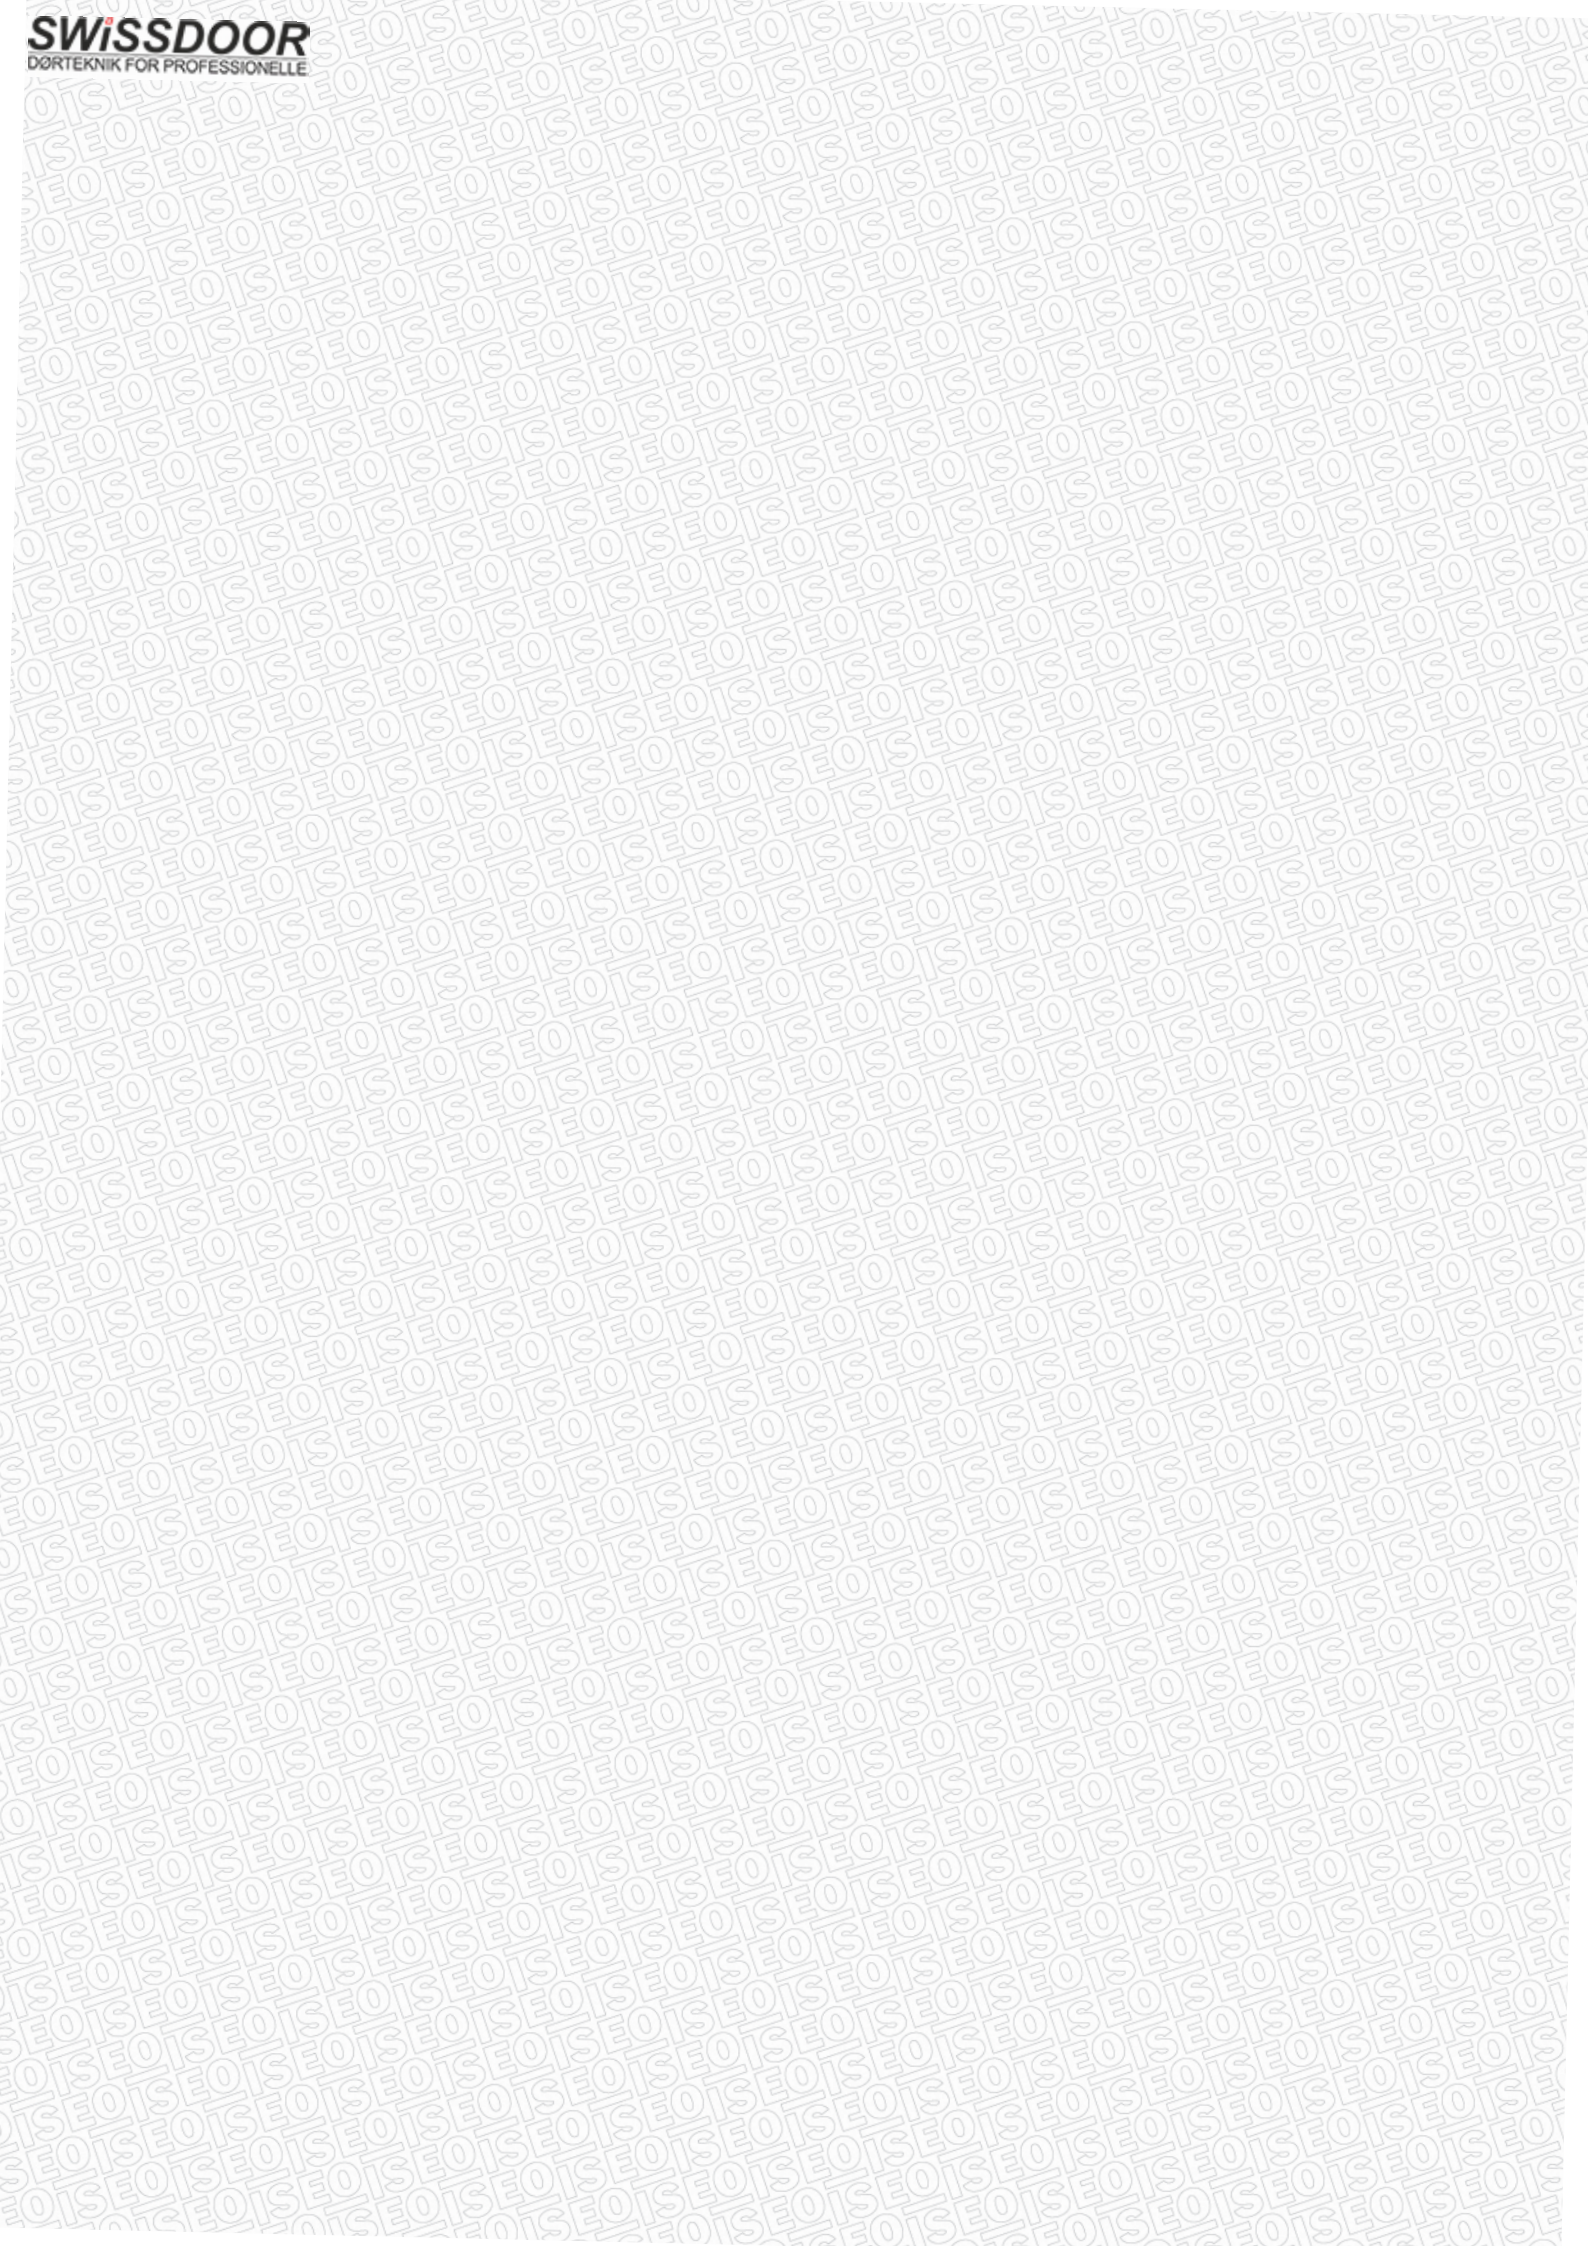

Danish Seller

Swissdoor ApS
Stenhuggervej 2
5471 Soendersoe
Denmark
VAT nr.: 32084222
Tlf. nr.: +45 8628 0000
mail@swissdoor.dk
www.swissdoor.dk